

BD2A-1000-ME-MBAL BD2A CENTRAL FEEDER UNIT 1000A FOR SINGLE CORE CABLE

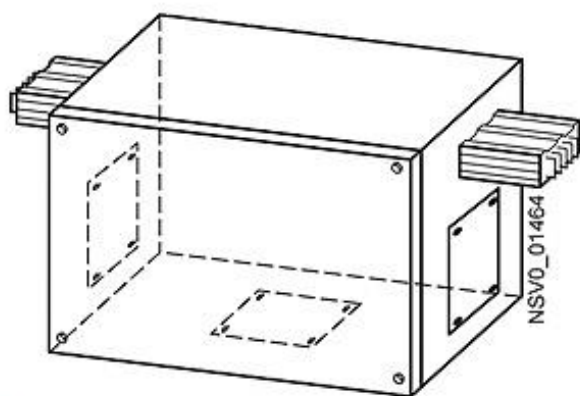


Figure similar

Model	
Product designation	feeder unit for BD2 busbar trunking system
Protection class	
Protection class IP	IP54
Main circuit	
Operating frequency / rated value	
• minimum	50 Hz
• maximum	60 Hz
Operating voltage / at AC	
• at 50 Hz / rated value / maximum	690 V
• at 60 Hz / rated value / maximum	690 V
Operating current	
• for circuit 1 / at AC / at 50 Hz / rated value / maximum	1 000 A
• for circuit 1 / at AC / at 60 Hz / rated value / maximum	1 000 A

Connections

Connectable conductor cross-section / in the feeder box

- minimum 10 mm²
- maximum 300 mm²

Mechanical Design

Height	374 mm
Width	680 mm
Length	1 250 mm
Mounting type	ceiling / wall
Material / of the busbar	aluminium

Declaration of Conformity



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=BVP:611112>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/BVP:611112>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:611112

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>