

BD2-AK2M2/2SD163CEE165A163 TAP-OFF UNIT 16A / 1X 3P.
MCB(B)+1X5P.CEE 2X 1P.MCB(B)+2XSD

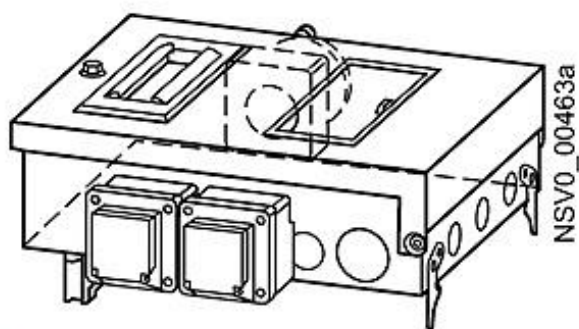


Figure similar

Model	
Product designation	tap-off unit for BD2 busbar trunking system
Protection class	
Protection class IP	IP54
Main circuit	
Operating frequency / rated value	
• minimum	50 Hz
• maximum	60 Hz
Operating voltage / at AC	
• at 50 Hz / rated value / maximum	230 V
• at 60 Hz / rated value / maximum	230 V
Operating current	
• for circuit 1 / at AC / at 50 Hz / rated value / maximum	16 A
• for circuit 1 / at AC / at 60 Hz / rated value / maximum	16 A

Tap-off points

Outgoing unit version	socket
Design of short-circuit and overloading protection / in the outgoing unit	one 3-pole and two 1-pole 16 A miniature circuit-breakers
Size of the outgoing feeder	2
Number of poles / of the outgoing feeder	5

Mechanical Design

Height	160 mm
Width	345 mm
Length	320 mm
Number of width units	8
Product component / Locking mechanism	Yes

Declaration of Conformity



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=BVP:203150>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/BVP:203150>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:203150

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>