


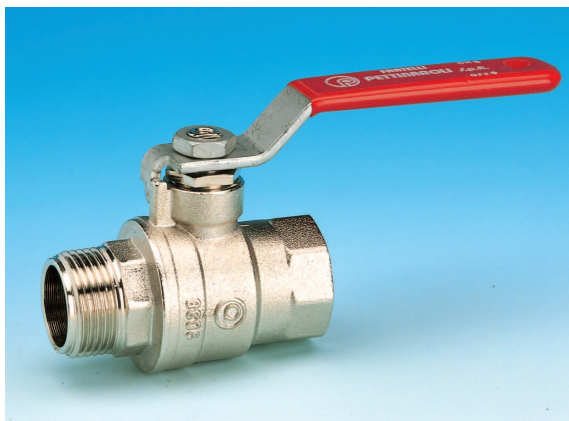


BESKRIVELSE

51CE/1

"Extra Compact" kuglehane med fuldt gennemløb. Muffe x nippel. Rødt stålhåndtag.

I henhold til EN 13828 standard.

DIMENSIONER

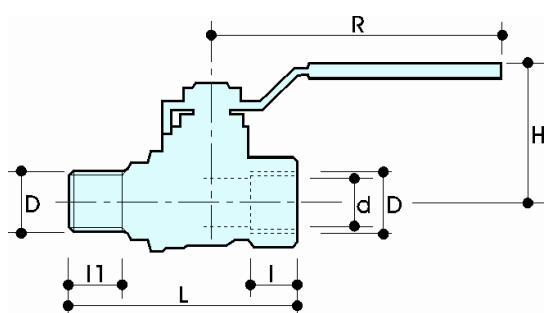

D	1/2"	3/4"	1"
d	15	22	25
H	39	49	52
I	12	13	14
I1	12	13	14
L	54.7	66.5	76
R	75	95	95
Accessory type	1	2	2
Gr.	180	310	470

Alle gevind er i overensstemmelse med ISO 7 og ISO 228 standarder.

MATERIALER

Ventilhus	CW617N (DIN 50930 part.6) CuZn40Pb2
Kugle	CW617N (DIN 50930 part.6) CuZn40Pb2 Krombelagt
Spindel	CW614N (DIN 50930 part.6) CuZn39Pb3
Pakdåse	CW614N (DIN 50930 part.6) CuZn39Pb3
Pakning	2 x PTFE
O-ringe	2 x FKM
Greb	Galvaniseret stål. PVC greb med print

VARIANTER

51CE	M X M, rødt stålgreb
51CE/1	M X N, rødt stålgreb
51CE/2	N X N, rødt stålgreb


GREBSVARIANTER

50CE	Rødt aluminiumsgreb
51CE	Rødt stålgreb
52CE	Rødt T-greb
52CET	Forlænget plastikgreb

Godkendelser



TRYKTABSDIAGRAM

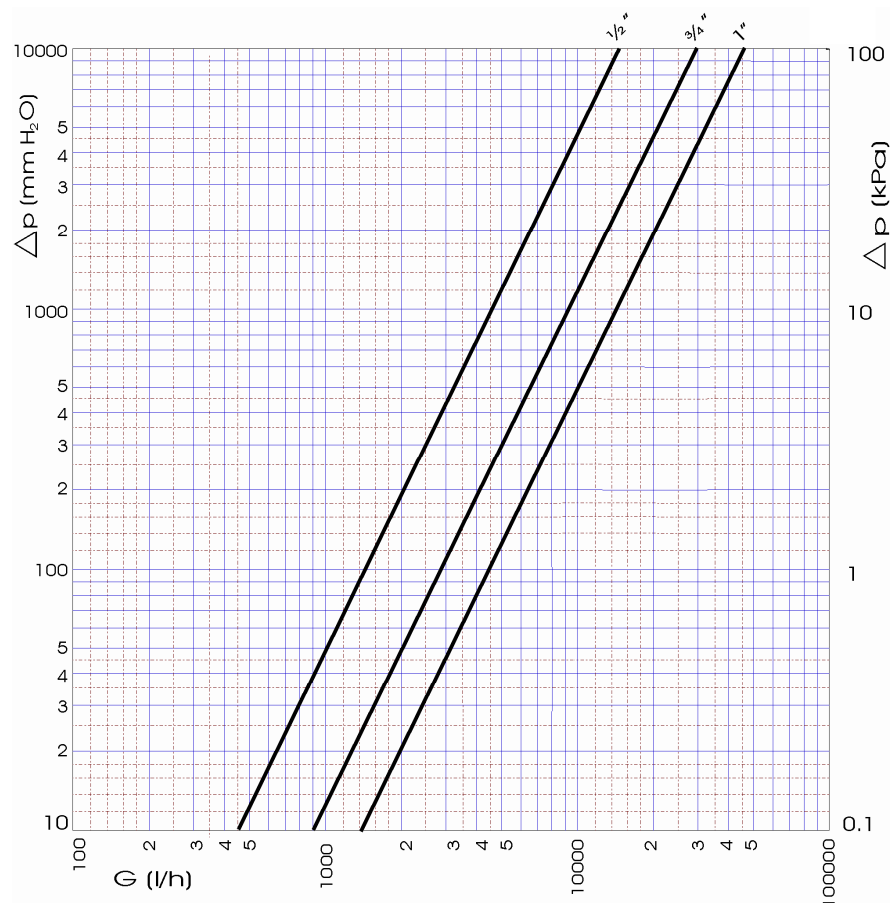

Dim.	1/2"	3/4"	1"
Kv	14.5	30	45
PN	28	28	28

ANBEFALET DRIFTSTEMPERATUR / MAKSIMALTRYK



28 bar - 100°C - non shock (1/2" - 1")

10 bar - 150°C - non shock