


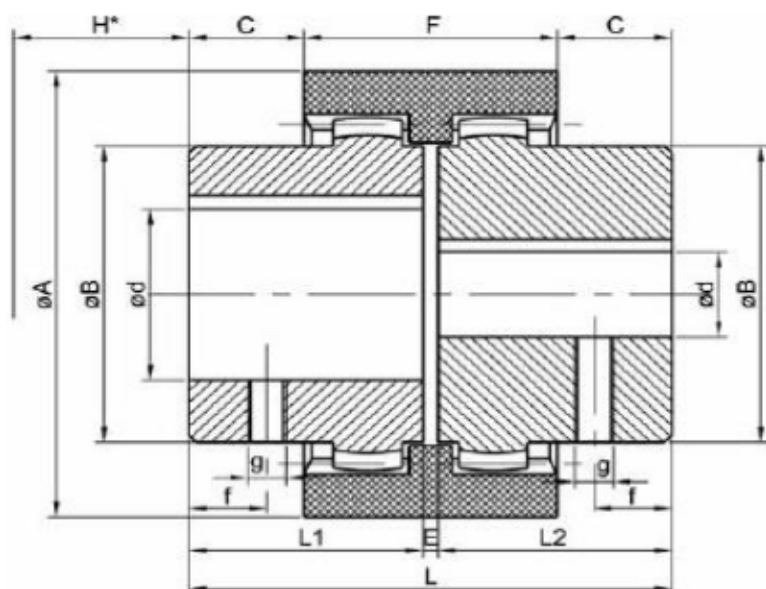

The part number is for a complete unit, consisting of two shafts and one sleeve.

I.ex. M-42 = 2 * M-42 SHAFT + 1 * M-42 SLEEVE

All parts can be ordered separately.

Part No.	Dimensions (mm)											Weight kg
	Bore	A	B	L	L1+L2	E	H*	C	F	g	f	
M-14	6-14	40	25	50	23	4	15	6,5	37	M5	6	0,18
M-19	8-19	48	30	54	25	4	17	7,0	37	M5	6	0,32
M-24	10-24	52	36	56	26	4	17	7,5	41	M5	6	0,32
M-28	10-28	66	44	84	40	4	20	19,0	46	M8	10	0,74
M-32	12-32	76	50	84	40	4	20	18,0	48	M8	10	0,95
M-38	14-38	83	58	84	40	4	20	18,0	48	M8	10	1,22
M-42	20-42	92	65	88	42	4	22	19,0	50	M8	10	1,49
M-48	20-48	100	68	104	50	4	22	27,0	50	M8	10	1,81
M-55	25-55	125	83	124	60	4	30	30,0	65	M10	20	3,45
M-65	25-65	140	96	144	70	4	32	36,0	72	M10	20	5,18

H* is the minimum dimension required for the disassembly of the aggregates in a radial direction.

Part No.	Rotation n max (1/min)	Torque (Nm)		Power (kW/min-1)		Max. misalignment (mm)		
		Norm.	Max.	Norm.	Max.	axial	radial or angular	
M-14	8000	10	20	0,0010	0,0021	± 1	± 0,3	± 1 per hub
M-19	8000	16	32	0,0017	0,0033	± 1	± 0,3	± 1 per hub
M-24	8000	20	40	0,0021	0,0042	± 1	± 0,4	± 1 per hub
M-28	8000	45	90	0,0047	0,0094	± 1	± 0,4	± 1 per hub
M-32	7000	60	120	0,0063	0,0130	± 1	± 0,4	± 1 per hub
M-38	6000	80	160	0,0084	0,0170	± 1	± 0,4	± 1 per hub
M-42	5400	100	200	0,0100	0,0200	± 1	± 0,4	± 1 per hub
M-48	5000	140	280	0,0150	0,0290	± 1	± 0,4	± 1 per hub
M-55	4000	250	500	0,0260	0,0520	± 1	± 0,4	± 1 per hub
M-65	3800	390	780	0,0410	0,0800	± 1	± 0,6	± 1 per hub