

Crank handles with safety grip, with square socket

Item description/product images



Description

Material:

Arm and grip black grey thermoplastic.

Version:


Steel parts black oxidised.

Note:

The hub cover is supplied unassembled. Two steps are required to move the cylindrical safety grip into operating position:

- Turn handle by rotary shaft up to stop (90°).
- Push grip in axial position into locking position. When engaged, the cylinder can be efficiently cranked using the grip. When released, the grip automatically returns to original position.

Drawings

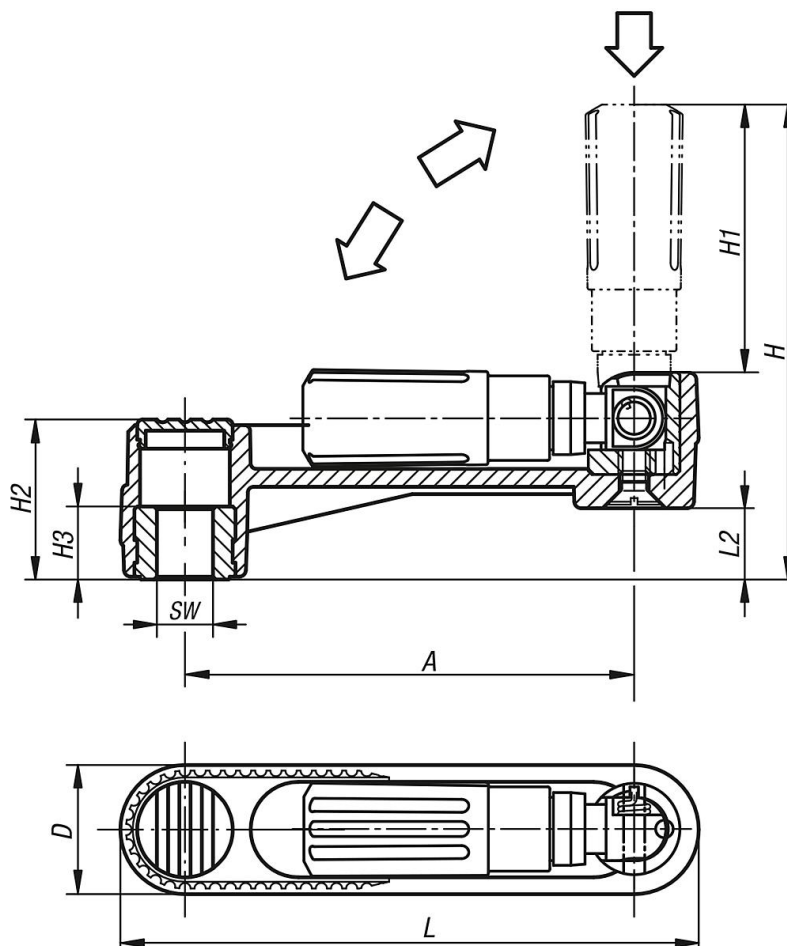

Overview of items

Crank handles with safety grip, with square socket

Overview of items

Order No.	Version 1	A	D	H	H1	H2	H3	L	L2	SW
K0268.2108	square socket	80	24	84	47,5	29	13	104	13	8
K0268.2110	square socket	80	24	84	47,5	29	13	104	13	10
K0268.2210	square socket	100	29	104	58,5	36	13	129	16	10
K0268.2212	square socket	100	29	104	58,5	36	13	129	16	12
K0268.2312	square socket	125	36	138,5	82	44	18,5	161	19,5	12
K0268.2314	square socket	125	36	138,5	82	44	18,5	161	19,5	14