

Crank handles with safety grip, without keyway

Item description/product images



Description

Material:

Arm and grip black grey thermoplastic.

Version:


Steel parts black oxidised.

Note:

The hub cover is supplied unassembled. Two steps are required to move the cylindrical safety grip into operating position:

- Turn handle by rotary shaft up to stop (90°).
- Push grip in axial position into locking position. When engaged, the cylinder can be efficiently cranked using the grip. When released, the grip automatically returns to original position.

Drawings

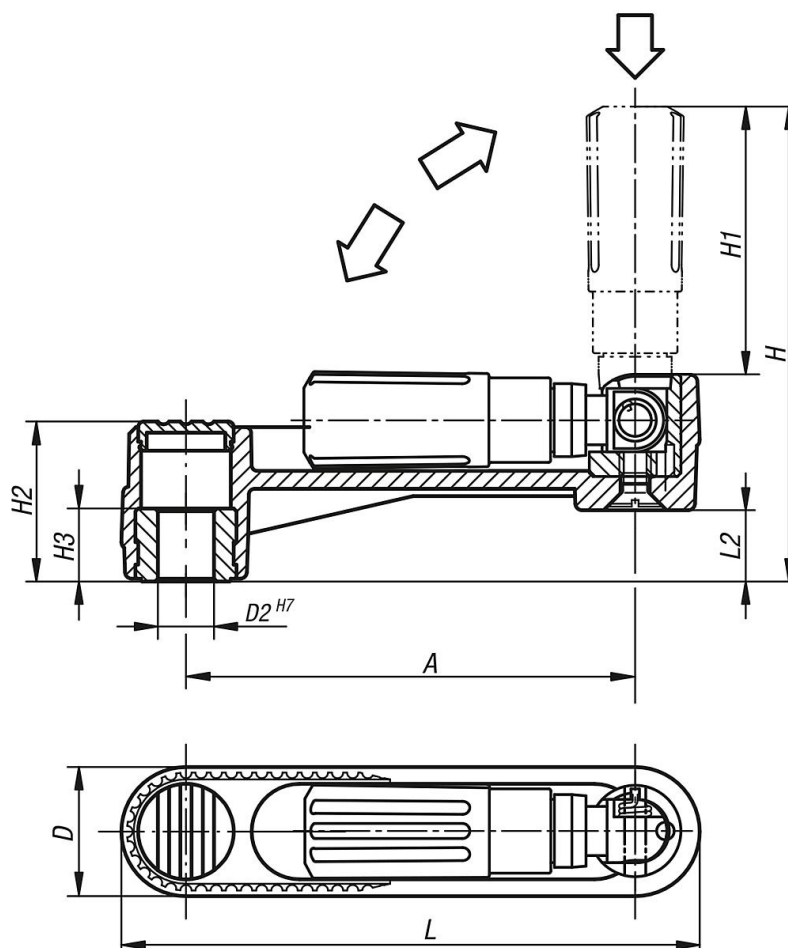

Overview of items

Crank handles with safety grip

Crank handles with safety grip, without keyway

Overview of items

Order No.	Version 1	A	D	D2	H	H1	H2	H3	L	L2
K0268.1108	reamed hole	80	24	8	84	47,5	29	13	104	13
K0268.1110	reamed hole	80	24	10	84	47,5	29	13	104	13
K0268.1210	reamed hole	100	29	10	104	58,5	36	13	129	16
K0268.1212	reamed hole	100	29	12	104	58,5	36	13	129	16
K0268.1312	reamed hole	125	36	12	138,5	82	44	18,5	161	19,5
K0268.1314	reamed hole	125	36	14	138,5	82	44	18,5	161	19,5