

Indexing plungers, Form D

Item description/product images



Description

Material:

Steel version

Indexing pin hardened:
grade 5.8.

Stainless steel version

Indexing pin hardened:
Threaded sleeve 1.4305.
Indexing pin 1.4034.

Indexing pin not hardened:

Threaded sleeve 1.4305.
Indexing pin 1.4305.

Mushroom knob black-grey thermoplastic.

Version:

Steel version:

Indexing pin hardened, ground, black oxidised.

Stainless steel version:

Indexing pin hardened, ground and bright.

Indexing pin not hardened, ground and bright.

Note:

Indexing plungers are used to prevent any change in locking position due to lateral forces. A new locking position can only be set after the pin has been manually disengaged. Form C or D is recommended for applications where the plunger remains disengaged over a long period and the pin should be prevented from springing back.


On request:

Special versions.

Indexing plungers, Form D

Drawings

Form D
lockout type
with locknut

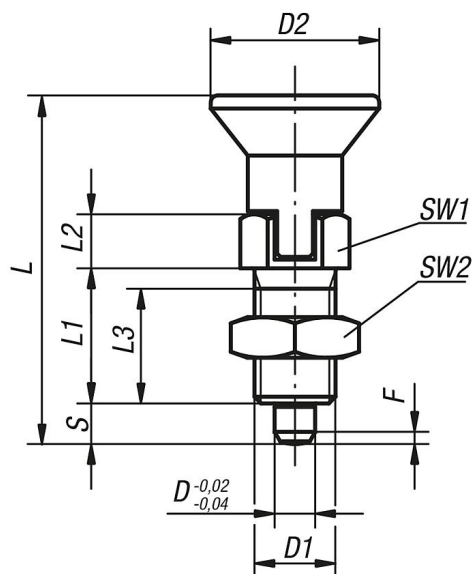

Overview of items

Order No.	Form	Main material	locating pin	D	D1	D2	L	L1	L2	L3	Travel S	SW1	SW2	Fx30°	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K0338.4903	D	steel	hardened	3	M6x0,75	14	31,5	12	5	10	3,5	8	10	0,8	4,5	10
K0338.4004	D	steel	hardened	4	M8x1	18	38,5	15	6	13	4	10	13	1	6	12
K0338.4105	D	steel	hardened	5	M10x1	21	43,5	17	7	15	5	13	17	1,3	5	12
K0338.4206	D	steel	hardened	6	M12x1,5	25	51,7	20	8	17	6	14	19	1,8	6	14
K0338.4308	D	steel	hardened	8	M16x1,5	33	68	26	10	23	8	19	24	2,3	15	35
K0338.4410	D	steel	hardened	10	M20x1,5	33	74	28	12	25	10	22	30	2,8	15	34
K0338.4412	D	steel	hardened	12	M20x1,5	33	78	28	14	25	12	22	30	2,8	15	39
K0338.4516	D	steel	hardened	16	M24x2	40	96	32	18	28	16	27	36	3,2	20	46
K0338.04903	D	stainless steel	hardened	3	M6x0,75	14	31,5	12	5	10	3,5	8	10	0,8	4,5	10
K0338.04004	D	stainless steel	hardened	4	M8x1	18	38,5	15	6	13	4	10	13	1	6	12
K0338.04105	D	stainless steel	hardened	5	M10x1	21	43,5	17	7	15	5	13	17	1,3	5	12
K0338.04206	D	stainless steel	hardened	6	M12x1,5	25	51,7	20	8	17	6	14	19	1,8	6	14
K0338.04308	D	stainless steel	hardened	8	M16x1,5	33	68	26	10	23	8	19	24	2,3	15	35
K0338.04410	D	stainless steel	hardened	10	M20x1,5	33	74	28	12	25	10	22	30	2,8	15	34
K0338.04412	D	stainless steel	hardened	12	M20x1,5	33	78	28	14	25	12	22	30	2,8	15	39
K0338.04516	D	stainless steel	hardened	16	M24x2	40	96	32	18	28	16	27	36	3,2	20	46
K0338.14903	D	stainless steel	not hardened	3	M6x0,75	14	31,5	12	5	10	3,5	8	10	0,8	4,5	10
K0338.14004	D	stainless steel	not hardened	4	M8x1	18	38,5	15	6	13	4	10	13	1	6	12
K0338.14105	D	stainless steel	not hardened	5	M10x1	21	43,5	17	7	15	5	13	17	1,3	5	12
K0338.14206	D	stainless steel	not hardened	6	M12x1,5	25	51,7	20	8	17	6	14	19	1,8	6	14
K0338.14308	D	stainless steel	not hardened	8	M16x1,5	33	68	26	10	23	8	19	24	2,3	15	35
K0338.14410	D	stainless steel	not hardened	10	M20x1,5	33	74	28	12	25	10	22	30	2,8	15	34
K0338.14412	D	stainless steel	not hardened	12	M20x1,5	33	78	28	14	25	12	22	30	2,8	15	39
K0338.14516	D	stainless steel	not hardened	16	M24x2	40	96	32	18	28	16	27	36	3,2	20	46