

Precision indexing plungers with tapered indexing pin, Form A, standard

Item description/product images



Description

Material:

Steel.

Grip ball thermoplastic.

Version:

Hardened and ground.


Grip ball black grey.

Note:

The indexing plungers with bushes are a perfect combination for rapid positioning and fixating. The precise design of both the indexing plunger and the bush guarantees high repeat accuracy when assembling two elements.

For technical information see assembly and installation instructions.

Drawings

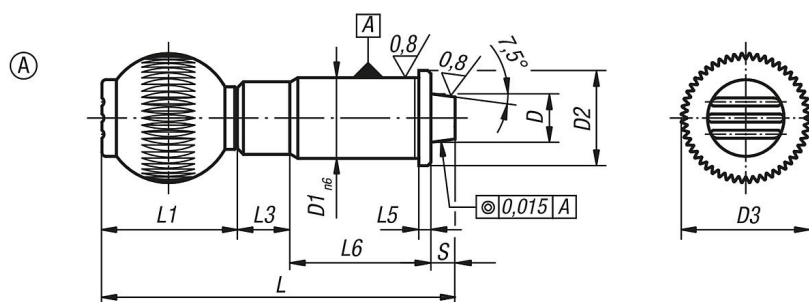

Overview of items

Precision indexing plungers with tapered pin

Order No.	Form	Version 2	D	D1	D2	D3	L	L1	L3	L5	L6	Travel S	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N	Internal thread grip ball
K0359.010	A	standard	10	16	19	25	75	25	13	2,5	31	6	19	29	M6
K0359.012	A	standard	12	20	23	32	87	33	13	3	35	6	22	35	M8
K0359.016	A	standard	16	25	28	40	102,5	41,5	13	3	42	6	30	50	M10
K0359.020	A	standard	20	30	33	40	110,5	41,5	13	3	50	6	46	63	M10
K0359.025	A	standard	25	38	42	50	130	51	13	3	60	6	39	73	M10