

Conical seats Form D DIN 6319, edition 10/01

Item description/product images



Description

Material:

Mild steel or stainless steel.

Form G high carbon steel tempered to HV 390 ±40.

Version:


Steel version case hardened.

Stainless steel version bright, not hardened.

Note:

Conical seat Form G should be used over slots.

Drawings

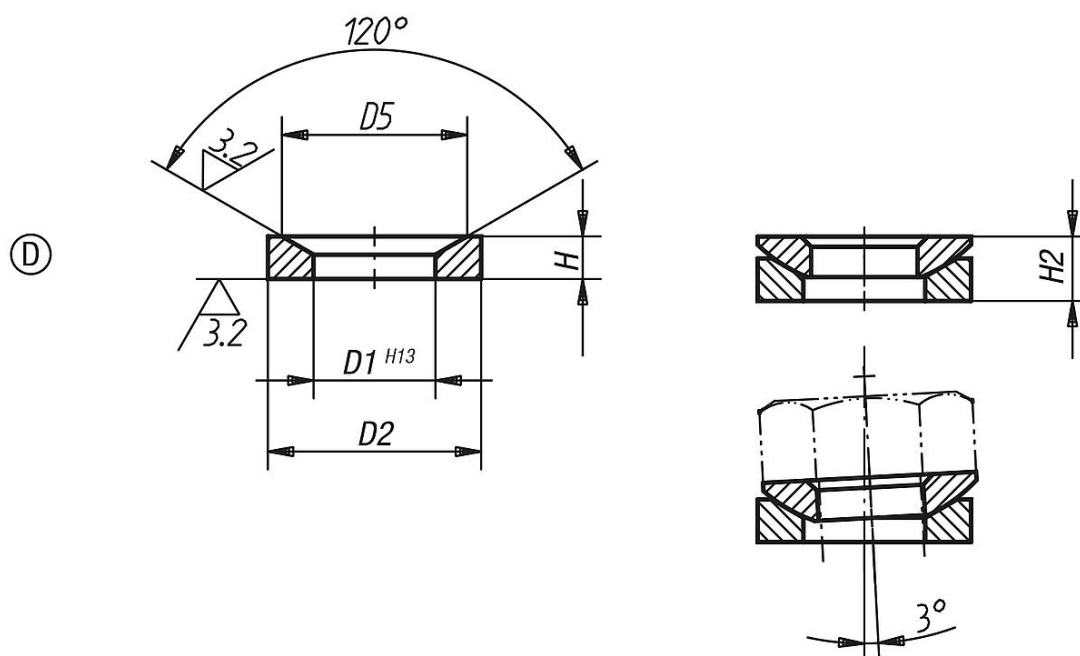

Overview of items

Order No. mild steel	Order No. stainless steel	Form	D1	D2	D5	H	H2	Load rating max. kN (static load only)
K0729.205	-	D	6	10,5	9,25	2,1	3,1	6,5
K0729.206	K0729.0206	D	7,1	12	11	2,8	4	9/6
K0729.208	K0729.0208	D	9,6	17	14,5	3,5	5,6	17/12
K0729.210	K0729.0210	D	12	21	18,5	4,2	6,3	26/16
K0729.212	K0729.0212	D	14,2	24	20	5	8	38/24
K0729.214	-	D	16,5	28	24,8	5,6	8,2	53
K0729.216	K0729.0216	D	19	30	26	6,2	9,3	73/45
K0729.220	K0729.0220	D	23,2	36	31	7,5	11,6	117/71
K0729.224	K0729.0224	D	28	44	37	9,5	15	168/105
K0729.230	K0729.0230	D	35	56	49	12	18,9	269/191
K0729.236	K0729.0236	D	42	68	60	15	23,3	394/-
K0729.242	K0729.0242	D	49	78	70	18	28,3	542/-
K0729.248	K0729.0248	D	56	92	82	22	35,2	714/-
K0729.256	-	D	65	103	92	25	39,7	960
K0729.264	-	D	75	120	110	30	46,5	1269

