

Indexing plungers, Form B

Item description/product images



Description

Material:

Steel version:
Indexing pin not hardened.
Threaded sleeve 1.0718.
Indexing pin 1.4305.

Stainless steel version:
Indexing pin not hardened.
Threaded sleeve and indexing pin 1.4305.

Mushroom knob black grey thermoplastic.

Version:

Steel version:
Indexing pin hardened.
Threaded sleeve trivalent blue passivated.
Indexing pin bright.

Stainless steel version:
Indexing pin not hardened.
Steel parts bright.

Note:


This article is a cost-efficient alternative to the existing indexing plungers. It is suitable for applications which require less precision.
The max. tightening torque should be observed when assembling.

On request:

Special versions and fine thread

Drawings

Form B
non-lockout type
with locknut

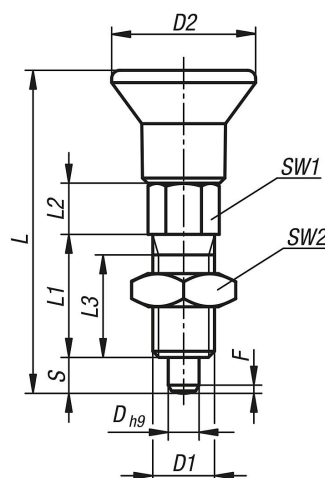

Indexing plungers, Form B

Overview of items

Order No.	Form	Main material	D	D1	D2	L	L1	L2	L3	Travel S	SW1	SW2	Fx30°	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N	Tightening torque max. Nm
K0747.02903060	B	steel	3	M6	14	31,5	12	5	10	3,5	6	10	0,8	4	10	2
K0747.02004060	B	steel	4	M6	14	36	15	6	13	4	6	10	1	6	12	2
K0747.02105080	B	steel	5	M8	14	40	17	7	15	5	8	13	1,3	6	12	7
K0747.02206100	B	steel	6	M10	18	47,5	20	8	17	6	10	17	1,8	8	15	15
K0747.02308120	B	steel	8	M12	25	61,7	26	10	23	8	12	19	2,3	8	19	20
K0747.12903060	B	stainless steel	3	M6	14	31,5	12	5	10	3,5	6	10	0,8	4	10	2
K0747.12004060	B	stainless steel	4	M6	14	36	15	6	13	4	6	10	1	6	12	2
K0747.12105080	B	stainless steel	5	M8	14	40	17	7	15	5	8	13	1,3	6	12	7
K0747.12206100	B	stainless steel	6	M10	18	47,5	20	8	17	6	10	17	1,8	8	15	15
K0747.12308120	B	stainless steel	8	M12	25	61,7	26	10	23	8	12	19	2,3	8	19	20