

Indexing plungers short version, Form B

Item description/product images



Description

Material:

Steel version:
Indexing pin not hardened.
Threaded sleeve 1.0718.
Indexing pin 1.4305.

Stainless steel version:
Indexing pin not hardened.
Threaded sleeve and indexing pin 1.4305.

Mushroom knob black grey thermoplastic.

Version:

Steel version:
Indexing pin hardened.
Threaded sleeve trivalent blue passivated.
Indexing pin bright.

Stainless steel version:
Indexing pin not hardened.
Steel parts bright.

Note:


This article is a cost-efficient alternative to the existing indexing plungers. It is suitable for applications which require less precision.
The max. tightening torque should be observed when assembling.

On request:

Special versions.

Drawings

Form B
non-lockout type
with locknut

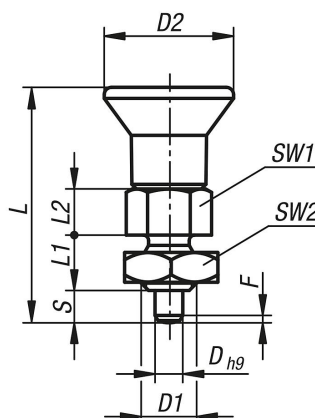

Overview of items

Order No.	Form	Main material	D	D1	D2	L	L1	L2	Travel S	SW1	SW2	Fx30°	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N	Tightening torque max. Nm
K0748.02903060	B	steel	3	M6	14	25,5	6	5	3,5	8	10	0,8	3,5	8	2

Indexing plungers short version, Form B

Overview of items

Order No.	Form	Main material	D	D1	D2	L	L1	L2	Travel S	SW1	SW2	Fx30°	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N	Tightening torque max. Nm
K0748.02004080	B	steel	4	M8	18	29,5	6	6	4	10	13	1	3,5	9	2
K0748.02105100	B	steel	5	M10	21	34,5	8	7	5	13	17	1,3	6	12	7
K0748.02206120	B	steel	6	M12	25	41,7	10	8	6	14	19	1,8	6	12	15
K0748.02308160	B	steel	8	M16	33	54	12	10	8	19	24	2,3	6	13	20
K0748.12903060	B	stainless steel	3	M6	14	25,5	6	5	3,5	8	10	0,8	3,5	8	2
K0748.12004080	B	stainless steel	4	M8	18	29,5	6	6	4	10	13	1	3,5	9	2
K0748.12105100	B	stainless steel	5	M10	21	34,5	8	7	5	13	17	1,3	6	12	7
K0748.12206120	B	stainless steel	6	M12	25	41,7	10	8	6	14	19	1,8	6	12	15
K0748.12308160	B	stainless steel	8	M16	33	54	12	10	8	19	24	2,3	6	13	20