

Indexing plungers with thread lock, Form CP

Item description/product images



Description

Material:

Steel version:

Indexing pin not hardened:

Threaded sleeve 1.0718.

Indexing pin 1.4305.

Stainless steel version:

Indexing pin not hardened:

Threaded sleeve and indexing pin 1.4305.

Mushroom knob black grey thermoplastic.

Thread lock blue polyamide.

Version:

Steel version:

Indexing pin hardened.

Threaded sleeve trivalent blue passivated.

Indexing pin bright.

Stainless steel version:

Indexing pin not hardened.

Steel parts bright.

Note:

This article is a cost-effective alternative to the existing indexing plungers. It is suitable for applications which require less precision.

The screw lock allows the thread to be screwed in to the exact depth required, no spacer ring is required.


The screw lock is a spotted-on polyamide coating that grips the screw flank. Screw-in and screw-out torques are reference values only.

On request:

Special versions and fine thread

Drawings

Form CP
lockout type
without locknut

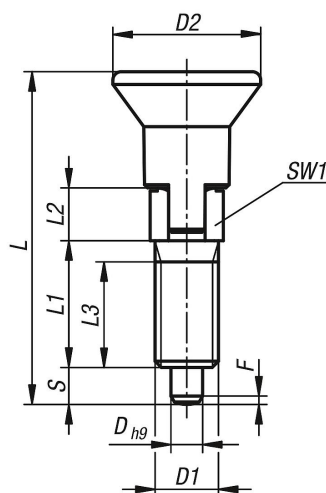

Indexing plungers with thread lock, Form CP

Overview of items

Order No.	Main material	Form	D	D1	D2	L	L1	L2	L3	Travel S	SW1	Fx30°	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K1098.093903060	steel	CP	3	M6	14	31,5	12	5	10	3,5	6	0,8	4	10
K1098.093004060	steel	CP	4	M6	14	36	15	6	13	4	6	1	6	12
K1098.093105080	steel	CP	5	M8	14	40	17	7	15	5	8	1,3	6	12
K1098.093206100	steel	CP	6	M10	18	47,5	20	8	17	6	10	1,8	8	15
K1098.093308120	steel	CP	8	M12	25	61,7	26	10	23	8	12	2,3	8	19
K1098.193903060	stainless steel	CP	3	M6	14	31,5	12	5	10	3,5	6	0,8	4	10
K1098.193004060	stainless steel	CP	4	M6	14	36	15	6	13	4	6	1	6	12
K1098.193105080	stainless steel	CP	5	M8	14	40	17	7	15	5	8	1,3	6	12
K1098.193206100	stainless steel	CP	6	M10	18	47,5	20	8	17	6	10	1,8	8	15
K1098.193308120	stainless steel	CP	8	M12	25	61,7	26	10	23	8	12	2,3	8	19