

Hinges lift-off stainless steel

Item description/product images



Description

Material:

Hinge stainless steel 1.4401.

Pin stainless steel 1.4104.

Version:

High-gloss polished.

Note:

Hinge for panel elements and aluminium profiles, lift-off. Pin end closed. Screws countersunk, thus minimum dirt accumulation.


The loading values given for the hinges are non-binding reference values without consideration of safety factors and exclude any liability. The values given are for information purposes only and do not constitute a legally binding assurance of properties.

The load values have been determined under laboratory conditions. Each user must determine individually whether the hinge is suitable for the respective application.

Different materials onto which the hinges are installed and the type of mounting, weather conditions and wear can influence the determined values.

Hinges lift-off stainless steel

Drawings

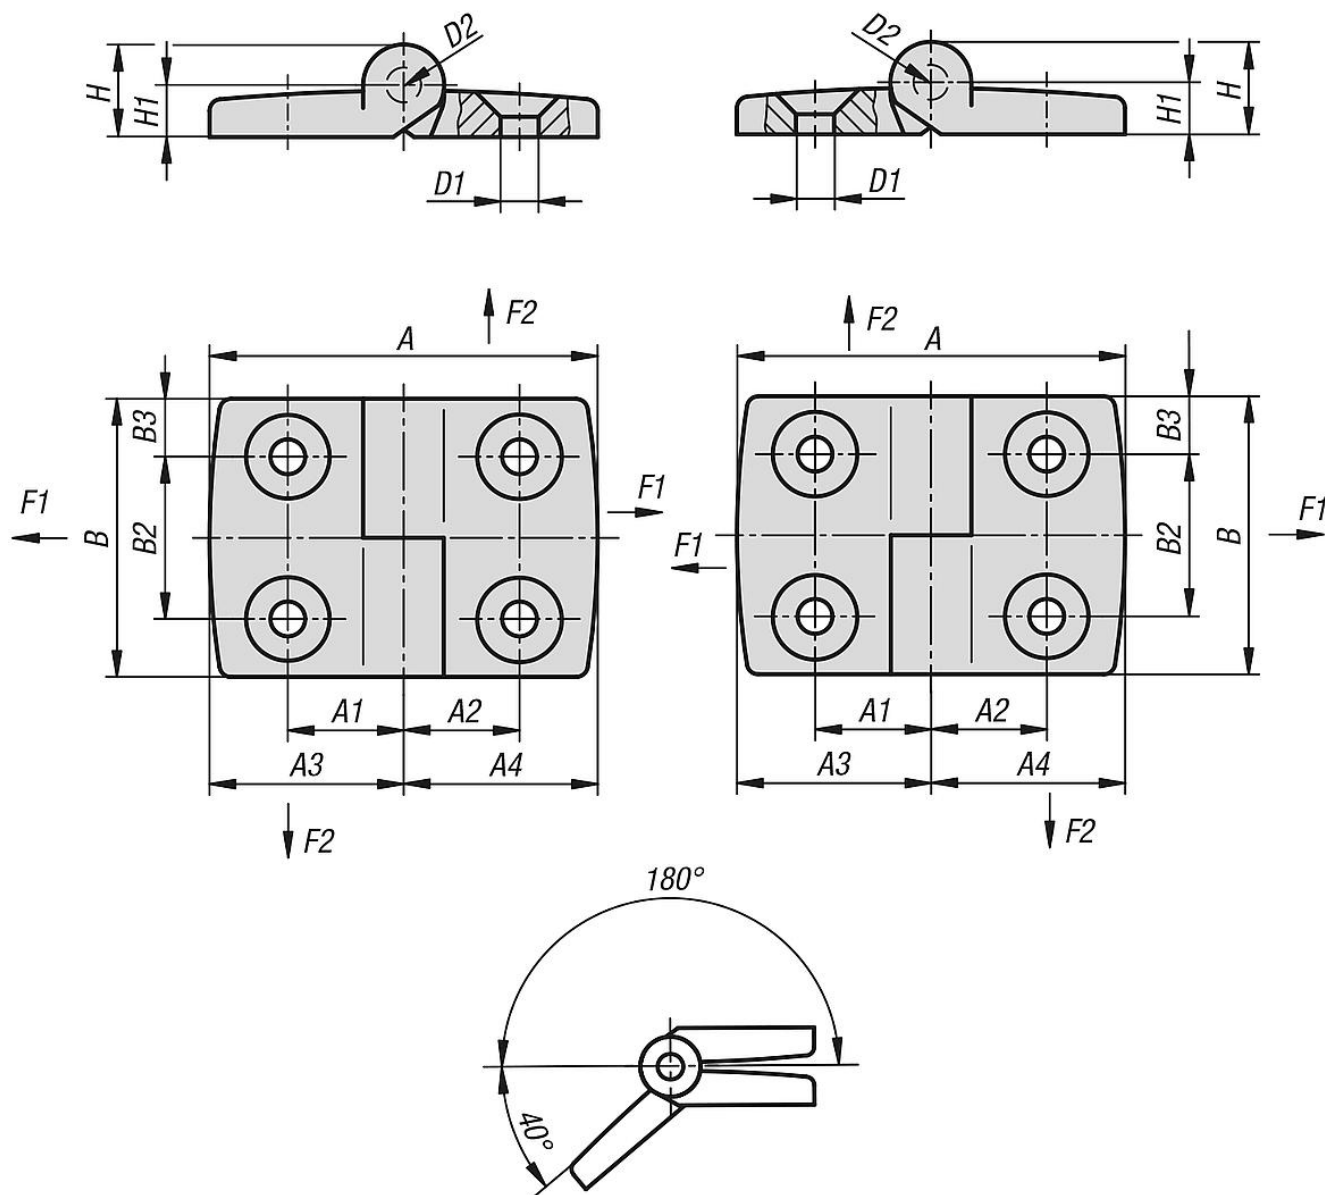

Overview of items

Hinges lift-off stainless steel

Order No.	Version	A	A1	A2	A3	A4	B	B2	B3	D1	D2	H	H1	Load capacity N	F1 max. kN	F2 max. kN
K1345.16261515	left	52	15	15	26	26	48	28	10	6,6	6	16	9	5000	0,9	0,625
K1345.16301818	left	59	17,5	17,5	29,5	29,5	48	28	10	6,6	6	16	9	5000	1	0,71
K1345.16392323	left	77	22,5	22,5	38,5	38,5	48	28	10	6,6	6	16	9	5000	1,2	0,5
K1345.16442525	left	87	25	25	43,5	43,5	48	28	10	6,6	6	16	9	5000	1,2	0,45
K1345.16583333	left	115	32,5	32,5	57,5	57,5	48	28	10	6,6	6	16	9	5000	1,2	0,35
K1345.06261515	right	52	15	15	26	26	48	28	10	6,6	6	16	9	5000	0,9	0,625
K1345.06301818	right	59	17,5	17,5	29,5	29,5	48	28	10	6,6	6	16	9	5000	1	0,71
K1345.06392323	right	77	22,5	22,5	38,5	38,5	48	28	10	6,6	6	16	9	5000	1,2	0,5
K1345.06442525	right	87	25	25	43,5	43,5	48	28	10	6,6	6	16	9	5000	1,2	0,45
K1345.06583333	right	115	32,5	32,5	57,5	57,5	48	28	10	6,6	6	16	9	5000	1,2	0,35

