
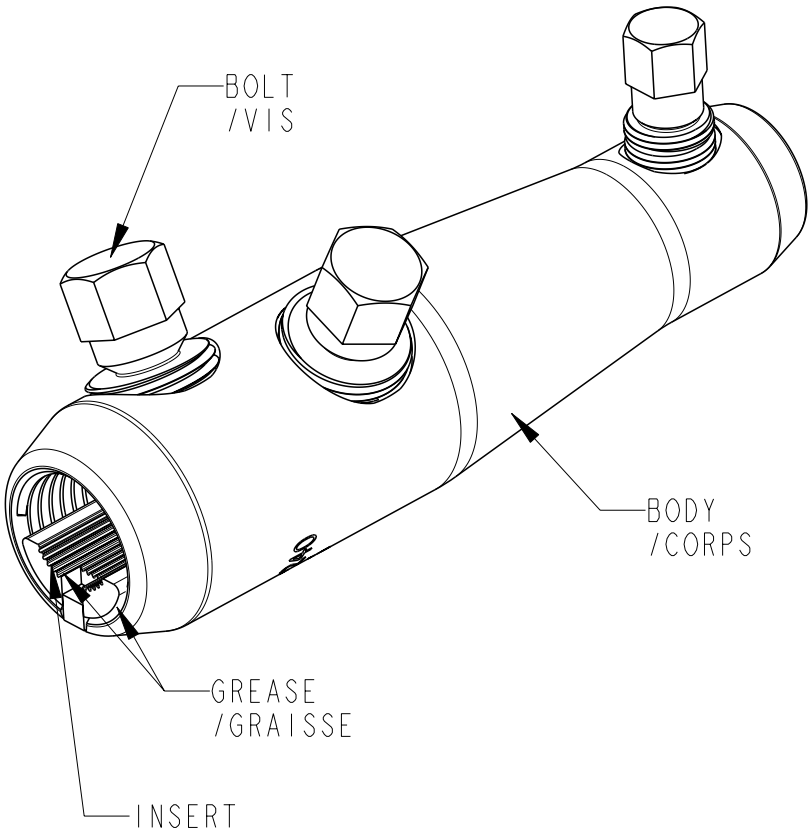
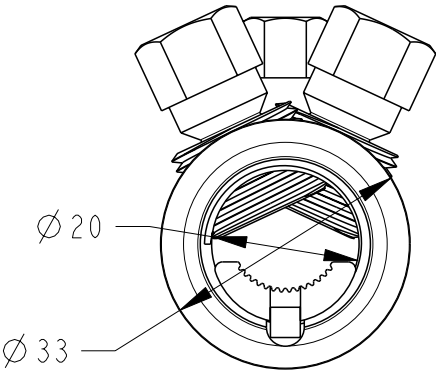
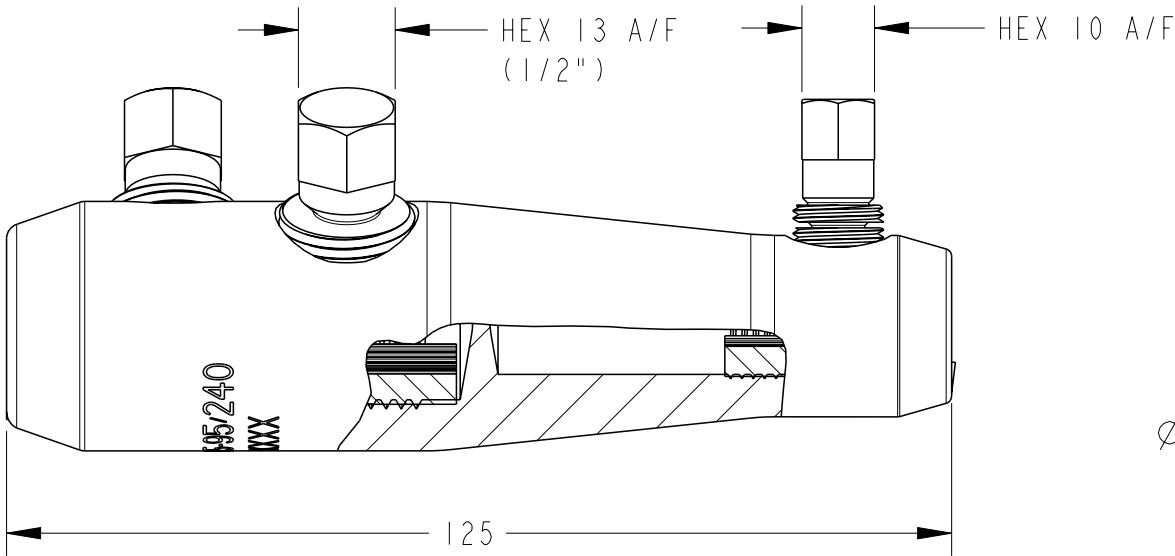



BSMB-25/95-95/240	877438N001
DESCRIPTION	TCPN

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	0	CREATION	08JUN2005	NA	AD
	A	CROSS SECTION ALU ROUND SOLID ADDED	15NOV2006	AB	BP
	B	UPDATE MARKING	12JULY2007	BM	BP
	C	ECR-20-002922 HEAD REDUCED TO 13	07MAY2020	NB	AG

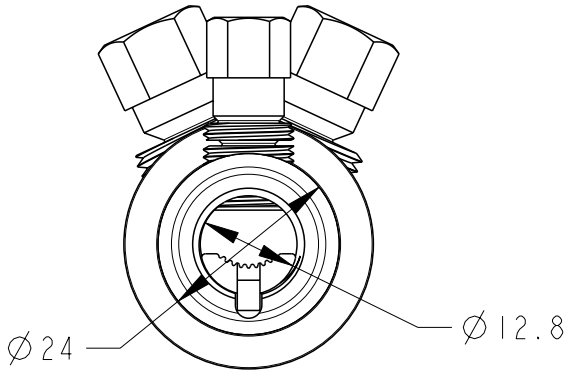

	AL				CU			ROUND FLEX
	ROUND STRANDED /Rond câblé /RM	ROUND SOLID /Rond solide /RE	SECTOR STRANDED /Sectoral câblé /SM	SECTOR SOLID /Sectoral câblé /SE	ROUND STRANDED /Rond câblé /RM	SECTOR STRANDED /Sectoral câblé /SM	ROUND SOLID /Rond solide /RE	
CONDUCTOR CROSS-SECTION /Section conducteur /Querschnittsbereich mm ² 95/240 SIDE/SEITE	70-240	95-240	95-150 (185 with 240 rounding)	95-150 (185 with 90°)	70-240	95-150 (185 with rounding)	-	95-150
CONDUCTOR DIAMETER LEITERDURCHMESSER mm	Ø 9.3-Ø 19.2	Ø 10.5-Ø 18	-	-	Ø 9.3-Ø 19.2	-	-	Ø 13-14.3 Ø 16.5-Ø 19
CONDUCTOR DIAMETER /Diamètre conducteur /Leiterdurchmesser mm 25/95 SIDE/SEITE	25-95	25-95	25-70 (95 with rounding)	-	16-95	25-70 (95 with rounding)	10-50	25-30 70
CONDUCTOR DIAMETER LEITERDURCHMESSER mm	Ø 5.7-Ø 12.5	Ø 5.5-Ø 11	-	-	Ø 4.8-Ø 12.5	-	Ø 3.6-Ø 8	Ø 6.3-Ø 9.2 (25 ² -35 ²) Ø 11-Ø 12 (FOR 70 ²)

TOLERANCES UNLESS OTHERWISE SPECIFIED:
TOLERANCES NON SPECIFIEES: -

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN N BASAVARAJ 06MAR2020	 TE Connectivity				
DIMENSIONS: mm		CHK R.BUTHIOT 06MAR2020					
		APVD A.DUPONT 06MAR2020					
		PRODUCT SPEC -					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0 1 PLC ± 0 2 PLC ± 0 3 PLC ± 0 4 PLC ± 0 ANGLES ± -		APPLICATION SPEC -	NAME BSMB-25/95-95/240				
MATERIAL AL ALLOY		FINISH TINNED	WEIGHT 140 g	SIZE A3	CAGE CODE 00779	DRAWING NO C-1856146	RESTRICTED TO
CUSTOMER DRAWING			SCALE 1:1	SHEET 1	OF 1	REV C	