

HOLDER FOR 3 MODULES, METAL, 1NO, 1NO, SCREW
TERMINAL



Figure similar

| | |
|--|---|
| product brand name | SIRIUS ACT |
| Product designation | Commanding and signaling devices |
| Design of the product | Holder |
| Manufacturer's article number | <ul style="list-style-type: none"> • of supplied contact module 3SU1400-1AA10-1BA0, 3SU1400-1AA10-1BA0 • 2 of supplied contact module 3SU1400-1AA10-1BA0 • of the supplied holder 3SU1550-0AA10-0AA0 |
| Actuator: | |
| Design of the operating mechanism | 3-way with module |
| Number of contact modules | 2 |
| Holder: | |
| Material of the holder | Metal |
| Display: | |
| Number of LED modules | 0 |
| General technical data: | |
| Product function | |

| | |
|---|--|
| <ul style="list-style-type: none"> • positive opening | Yes |
| Product component | |
| <ul style="list-style-type: none"> • diode | No |
| <ul style="list-style-type: none"> • lamp transformer | No |
| <ul style="list-style-type: none"> • Light source | No |
| <ul style="list-style-type: none"> • series resistor | No |
| Insulation voltage | |
| <ul style="list-style-type: none"> • rated value | 500 V |
| Degree of pollution | 3 |
| Surge voltage resistance rated value | 6 kV |
| Protection class IP | |
| <ul style="list-style-type: none"> • of the terminal | IP20 |
| Shock resistance | |
| <ul style="list-style-type: none"> • acc. to IEC 60068-2-27 | Sinusoidal half-wave 50 g / 11 ms |
| <ul style="list-style-type: none"> • for railway applications acc. to DIN EN 61373 | Category 1, Class B |
| Vibration resistance | |
| <ul style="list-style-type: none"> • acc. to IEC 60068-2-6 | 10 ... 500 Hz: 5g |
| <ul style="list-style-type: none"> • for railway applications acc. to DIN EN 61373 | Category 1, Class B |
| Operating frequency maximum | 3 600 1/h |
| Mechanical service life (switching cycles) | |
| <ul style="list-style-type: none"> • typical | 10 |
| Thermal current | 10 A |
| Equipment marking | |
| <ul style="list-style-type: none"> • acc. to DIN EN 61346-2 | U |
| <ul style="list-style-type: none"> • acc. to DIN EN 81346-2 | U |
| Continuous current of the C characteristic MCB | 10 A; for a short-circuit current smaller than 400 A |
| Continuous current of the quick DIAZED fuse link | 10 A |
| Continuous current of the DIAZED fuse link gG | 10 A |

Main circuit:

| | |
|---|---|
| Operating voltage | |
| <ul style="list-style-type: none"> • at AC <ul style="list-style-type: none"> — at 50 Hz rated value — at 60 Hz rated value • at DC <ul style="list-style-type: none"> — rated value | 5 ... 500 V 5 ... 500 V 5 ... 500 V |

Power Electronics:

| | |
|----------------------------|--|
| Contact reliability | One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) |
|----------------------------|--|

Auxiliary circuit:

| | |
|--|--------------|
| Design of the contact of auxiliary contacts | Silver alloy |
| Number of NC contacts | |

| | |
|-----------------------------------|-----|
| • for auxiliary contacts | 0 |
| Number of NO contacts | |
| • for auxiliary contacts | 2 |
| Number of CO contacts | |
| • for auxiliary contacts | 0 |
| Operating current at AC-15 | |
| • at 230 V rated value | 6 A |

Connections/ Terminals:

| | |
|---|------------------------------------|
| Type of electrical connection | |
| • of modules and accessories | Screw-type terminal |
| Type of connectable conductor cross-sections | |
| • solid with core end processing | 2x (0.5 ... 0.75 mm ²) |
| • solid without core end processing | 2x (1.0 ... 1.5 mm ²) |
| • finely stranded with core end processing | 2x (0.5 ... 1.5 mm ²) |
| • finely stranded without core end processing | 2x (1,0 ... 1,5 mm ²) |
| • at AWG conductors | 2x (18 ... 14) |
| Connectable conductor cross-section | |
| • finely stranded with core end processing | 0.5 ... 1.5 mm ² |
| Tightening torque of the screws in the bracket | 1 ... 1.2 N·m |
| Tightening torque | |
| • with screw-type terminals | 0.8 ... 0.9 N·m |
| • for grounding | 0.8 ... 1 N·m |

Ambient conditions:

| | |
|--|---|
| Ambient temperature | |
| • during operation | -25 ... +70 °C |
| • during storage | -40 ... +80 °C |
| Environmental category during operation acc. to IEC 60721 | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95 %, no condensation in operation permitted) |

Installation/ mounting/ dimensions:

| | |
|--|----------------------|
| Mounting type | front mounting |
| • of modules and accessories | Front plate mounting |
| Height | 40 mm |
| Width | 30 mm |
| Shape of the installation opening | round |
| Installation width | 30 mm |
| Installation depth | 49.8 mm |

Certificates/approvals

| | | | | | |
|--|--|---|---|---|------------------------------------|
| General Product Approval | | | | Declaration of Conformity | Test Certificates |
|  CCC |  CSA |  UL |  |  EG-Konf. | Werksbescheinigung |

| | | | | | |
|---|--|--|--|---|-------------------------------|
| Test Certificates | Shipping Approval | | | | other |
| spezielle Prüfbescheinigung |  ABS |  LRS |  PRS |  RMRS | Bestätigungen |

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3SU1550-1AA10-1NA0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3SU1550-1AA10-1NA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1550-1AA10-1NA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3SU1550-1AA10-1NA0&lang=en

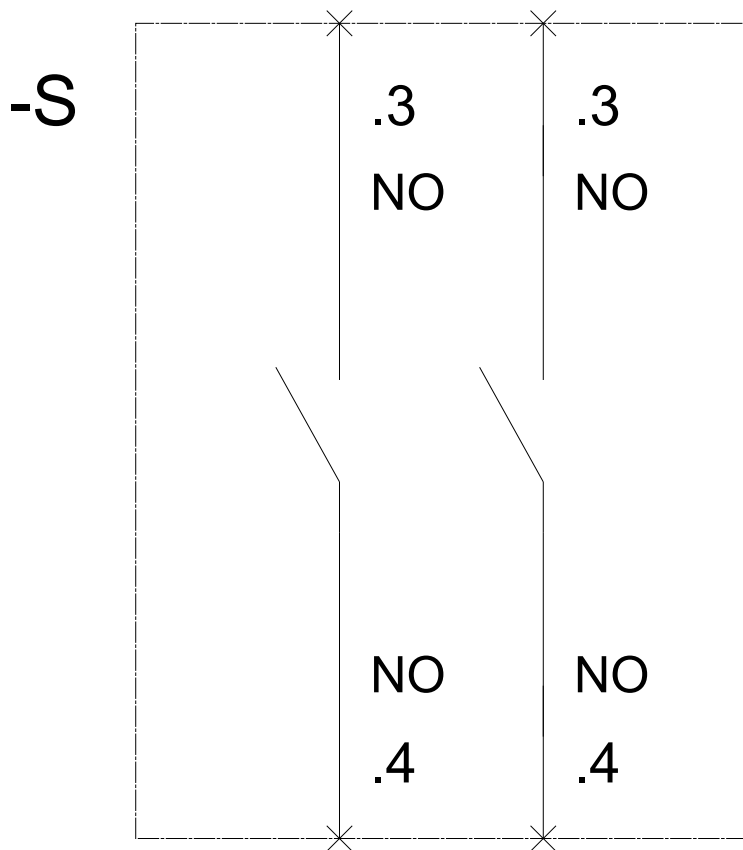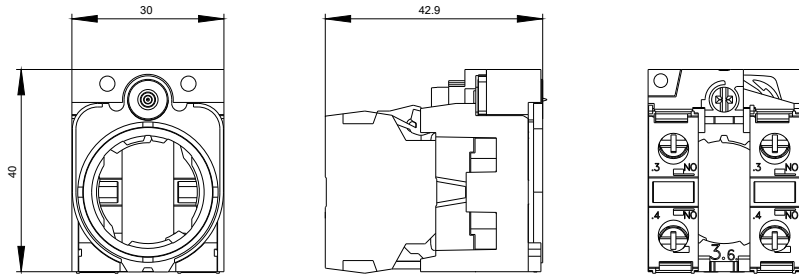

last modified:

09/17/2016