




TNC Crimp Plug

Egnede kabler:
LMR200




EAN: 5704717007318




T1121A1-025-NT3G-50-RY

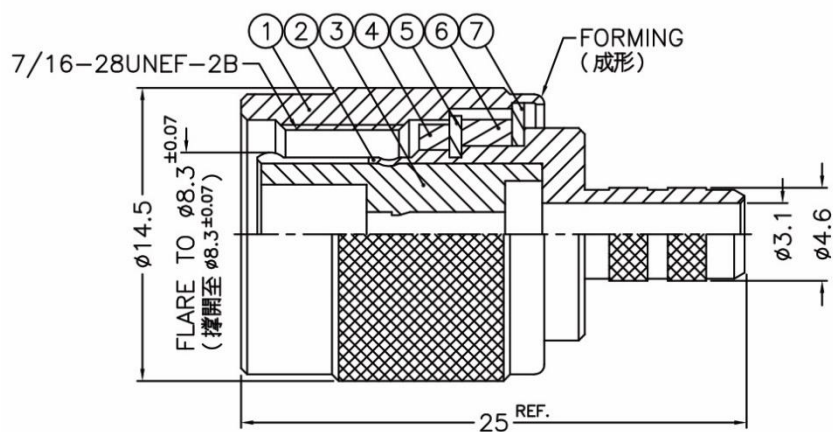

1	2	3	4	5	6	7	8
REVISIONS							
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE					

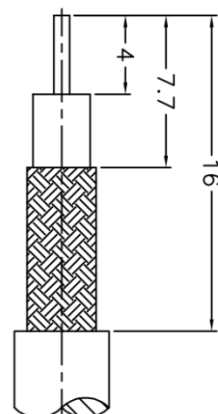

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

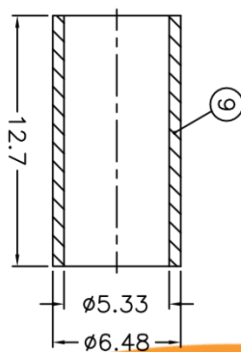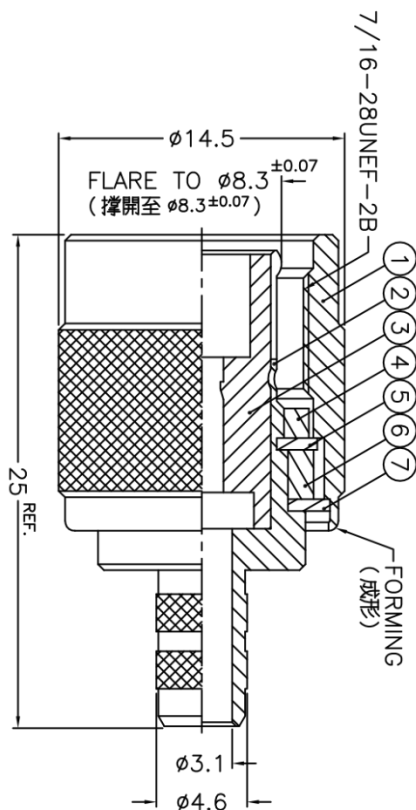

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
OVER COPPER PL. 50 MIN. THICK

ROHS COMPLIANT

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

1	2	3	4	5	6	7	8
REVISIONS							
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE					
NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.	SCALE	3/1
1	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.	SCALE	3/1
2	BODY	NOTE 1	NOTE 2	1	900-1000-2-06	315-1000 = ±1.6	1000-2000 = ±2.4
3	INSULATOR	DELIN	NATURAL	1	900-1000-3-50D	120-315 = ±1	315-1000 = ±1.6
4	GASKET	RUBBER	RED	1	GS-80-105-15	30-120 = ±0.6	6-30 = ±0.2
5	RETAINER RING	NOTE 1	NOTE 2	1	900-1000-5	0.5-6 = ±0.2	6-30 = ±0.2
6	RING	DELIN	NATURAL	1	71628-1000-6	30-120 = ±0.6	6-30 = ±0.2
7	WASHER	NOTE 1	NOTE 2	1	WS-90-128-08	0.5-6 = ±0.2	6-30 = ±0.2
8	CONTACT PIN	NOTE 1	NOTE 3	1	900-1121B1-8	30-120 = ±0.6	6-30 = ±0.2
9	FERRULE	COPPER	NOTE 2	1	FR-533-648	30-120 = ±0.6	6-30 = ±0.2

A

B

C

D

E

F

A

B

C

D

E

F