

H05 V-K / (H)07 V-K**

PVC-single cores, fine wire stranded, VDE 0281 approved



Twin tone PVC-Single Cores in Coils

Type Part No. Cross sec. mm ²	min. – max. ø mm	Cop. weight kg/km	red-white	blue-white	brown-white	dark blue-white
H05 V-K/mm²						
Part No. 0,5	2,1 – 2,5	4,8	29370	29375	29380	29394
Part No. 0,75	2,2 – 2,7	7,2	29371	29376	29381	29395
Part No. 1	2,4 – 2,8	9,6	29372	29377	29382	29396
(H)07 V-K**/mm²						
Part No. 1,5	2,8 – 3,4	14,4	29373	29378	29383	29397
Part No. 2,5	3,4 – 4,1	24,0	29374	29379	29384	29398
Part No. 4	3,9 – 4,8	38,0	29385	29386	29387	29399
Part No. 6	4,4 – 5,3	58,0	29388	29389	29390	29527
Part No. 10	5,7 – 6,8	96,0	29391	29392	29393	29528



Twin tone PVC-Single Cores in Barrels

Type Part No. Cross sec. mm ²	min. – max. ø mm	Cop. weight kg/km	red-white	blue-white	brown-white	dark blue-white
H05 V-K/mm²						
Part No. 0,5	2,1 – 2,5	4,8	28948	28949	28950	28951
Part No. 0,75	2,2 – 2,7	7,2	28952	28953	28954	28955
Part No. 1	2,4 – 2,8	9,6	28956	28957	28958	28959
(H)07 V-K**/mm²						
Part No. 1,5	2,8 – 3,4	14,4	28960	28961	28962	28963
Part No. 2,5	3,4 – 4,1	24,0	28964	28965	28966	28967
Part No. 4	3,9 – 4,8	38,0	28968	28969	28970	28971
Part No. 6	4,4 – 5,3	58,0	28972	28973	28974	28975
Part No. 10	5,7 – 6,8	96,0	28976	28977	28978	28979

* Please note: The colours yellow, green and transparent are only available in (H)05 V-U resp. (H)07 V-U.

** Two-coloured combination is only permitted for (H)07 V.

U = Solid conductor; R = Stranded conductor; K = Fine stranded conductor

Heat resistant versions see types HELUTHERM®. Colours available on request.

PVC cables will be changed to lead free PVC successively.




Twin tone PVC-Single Cores in Spool

Type Part No. Cross sec. mm ²	min. – max. ø mm	Cop. weight kg/km	red-white	blue-white	brown-white	dark blue-white
H05 V-K/mm²						
Part No. 0,5	2,1 – 2,5	4,8	29745	29746	29747	29748
Part No. 0,75	2,2 – 2,7	7,2	29749	29750	29751	29752
Part No. 1	2,4 – 2,8	9,6	29753	29754	29755	29756
(H)07 V-K**/mm²						
Part No. 1,5	2,8 – 3,4	14,4	29757	29758	29759	29760
Part No. 2,5	3,4 – 4,1	24,0	29761	29762	29763	29764
Part No. 4	3,9 – 4,8	38,0	29765	29766	29767	29768
Part No. 6	4,4 – 5,3	58,0	29769	29770	29771	29772
Part No. 10	5,7 – 6,8	96,0	29773	29774	29775	29776

K

H05 V-K, H07 V-K

PVC-Single Cores to VDE 0281

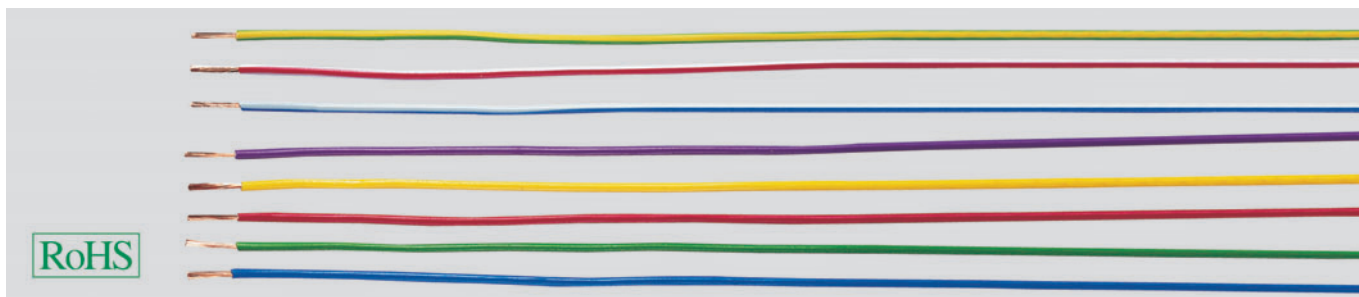

CE = The product is conformed with the EC Low-Voltage Directive 73/23/EWG and 93/68/EWG.

Barrels, one-way barrels or barrels on hire

Type cross section mm²	one-way cardboard 8-on guar dimension in mm	ca. contents in m
LIY		
0,25	500 x 500 x 420	10000
0,50	500 x 500 x 420	7000
0,75	500 x 500 x 420	5000
1,00	500 x 500 x 420	4000
1,50	500 x 500 x 420	3000

Type cross section mm²	one-way barrels 8-on guar dimension in mm	ca. contents in m
H05 V-K		
H07 V-K		
0,50	400 x 400 x 500	4000
0,75	400 x 400 x 500	3500
1,00	400 x 400 x 500	3000
1,50	400 x 400 x 500	2000
2,50	400 x 400 x 500	1200
4,00	400 x 400 x 500	900
6,00	400 x 400 x 500	800

Type cross section mm²	one-way barrels 8-on guar dimension in mm	ca. contents in m
H05 V-K		
H07 V-K		
0,50	400 x 400 x 800	7000
0,75	400 x 400 x 800	6000
1,00	400 x 400 x 800	5200
1,50	400 x 400 x 800	3500
2,50	400 x 400 x 800	2000



Delivery for one-way barrel

Works photo: HELUKABEL®

- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers
- PVC self-extinguishing and flame retardant according to DIN VDE 0482-332-1-2, DIN EN 60332-1-2/IEC 60332-1 (equivalent DIN VDE 0472 part 804 test method B)

K = Fine stranded conductor