



PHASE SIGNALL.,
D=70MM 3LAMPS 230V 3 X GREEN

Similar to image

Technical data:		
Nature of fluorescent material		glow lamp
type of voltage		AC
Mounting depth	mm	64
Number of pitch units for width		1
Operating voltage / rated value		
• minimum	V	230
• maximum	V	230
Active power / for filament lamp load / maximum	W	0.4
Protection class IP		IP20
Holder design / for fluorescent material		others
Color / of the lens		others

Certificates/approvals:		
General Product Approval	Declaration of Conformity	other



[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TE5802/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE5802

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

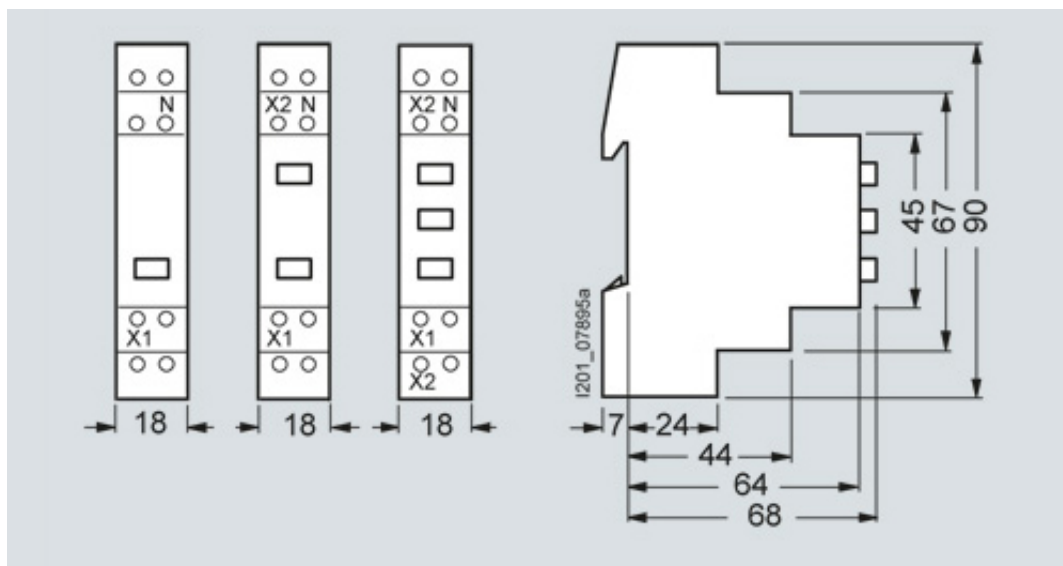

last change:

Aug 12, 2013