# **SIEMENS**

Product data sheet 5TE4830



PUSHBUTTON, D=70MM 1NC/1NO 20A, 2BUTTON RED+GREEN

### Similar to image

Technical data:		
Nature of fluorescent material		glow lamp
Number of NC contacts		1
type of voltage		AC
Number of change-over switches		0
Mounting depth	mm	70
Number of NO contacts		1
Number of pitch units for width		1
Current / rated value	Α	20
Color / of the button		others
Product component / Signal lamp		Yes
Operating voltage / rated value	V	400
Active power / for filament lamp load / maximum	W	0.17
Protection class IP		IP20
Holder design / for fluorescent material		others
Color / of the lens		others

## Certificates/approvals:

### **General Product Approval**

Declaration of Conformity

other









Environmental Confirmations

### **Further information:**

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/5TE4830/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=5TE4830

**CAx-Online-Generator** 

http://www.siemens.com/cax

**Tender specifications** 

Datanorm GAEB81 GAEB83 RTF TXT

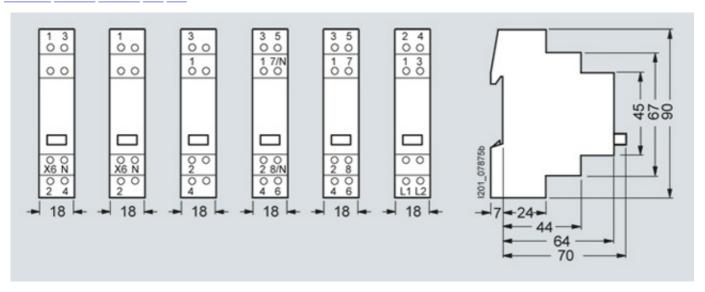

last change: Aug 12, 2013