SIEMENS

Product data sheet



CIRCUIT BREAKER 230V 6KA,1+N-POLE C, 8A, D=70MM

Similar to image

Technical data:		
Overvoltage class		3
type of voltage	-	AC/DC
Tripping characteristic class		С
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class	_	3
Number of poles		2
Number of pitch units for width		2
Product function / n-switching	_	Yes
Supply voltage frequency / rated value	Hz	50
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	15
Breaking capacity current / acc. to EN 60898 / rated value	kA	6
Supply voltage / for AC / rated value	V	230
Current / for AC / rated value	А	8
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-

	-
-	-
	-
	-
	-
	-
	-
	-
	-
А	8
А	7.52
А	7.22
А	6.92
А	6.62
А	6.32
	150m/s ² at 11ms half-sine
	A A A

Certificates/approvals:


General Product Approval


MQ
ROSTEST
Implies the second s


Further information:	
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/lowvoltage/catalogs	
Industry Mall (Online ordering system) http://www.siemens.com/lowvoltage/mall	
Service&Support (Manuals, Certificates, Characteristics, FAQs,) http://support.automation.siemens.com/WW/view/en/5SY6508-7/all	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagra http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY6508-7	ams,)

CAx-Online-Generator

http://www.siemens.com/cax

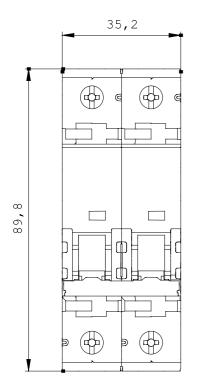

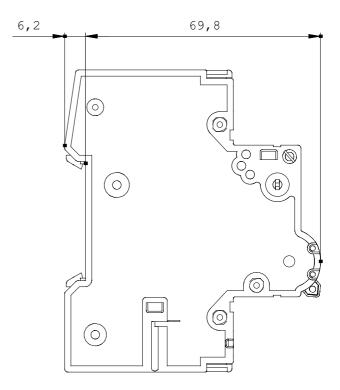

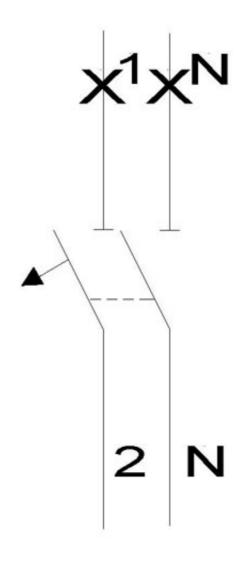

last change:

Nov 3, 2011