SIEMENS

Product data sheet

3RS1000-2CK10




TEMPERATURE MONITORING RELAY FOR PT100, EXCEEDING OF 1 THRESH. VAL., WIDTH 22ND5 MM 0 C-100 C, 110-120/220-240V AC 1 NO + 1 NC, CLOSED-CIRC.PRINC. CAGE-CLAMP - CONNECTION


General technical details:

General technical details:			
type of voltage		AC	
Supply voltage frequency			
• 1 / for auxiliary and control current circuit			
initial rated value	Hz	50	
• final rated value	Hz	60	
• 1 / at 50 Hz / for AC / rated value	V	110	
• 1 / at 60 Hz / for AC / rated value	V	110	
• 2			
• at 60 Hz / for AC			
rated value	V	230	
• at 50 Hz / for AC			
rated value	V	230	
Number of measuring circuits		1	
Product function			
defect storage		No	
reset external		No	
Measurable temperature			
• initial value	°C	0	
• final value	°C	100	

Item designation / according to DIN EN 61346-2		К		
Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750	_	К		
Ambient temperature	_			
during operating	°C	-25	60	
Mechanical design:				
Design of the electrical connection				
 for auxiliary and control current circuit 		spring	-loaded terminals	
• jumper socket		Yes		
Design of the sensor / connectable		PT100	PT100 (resistance sensor)	
Number of NC contacts / for auxiliary contacts		1		
Number of NO contacts / for auxiliary contacts		1		
Number of change-over switches / for auxiliary contacts		0		
Width	mm	22.5		
Height	mm	84		
Depth	mm	91		
Certificates/approvals:				
General Product Approval	Test Certificates		other	
ROSTEST Manufacturer Manufacturer cqc				
Further information:				
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/industrial-controls/catalogs				
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall				
CAx-Online-Generator http://www.siemens.com/cax				

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RS1000-2CK10

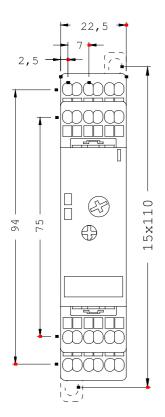

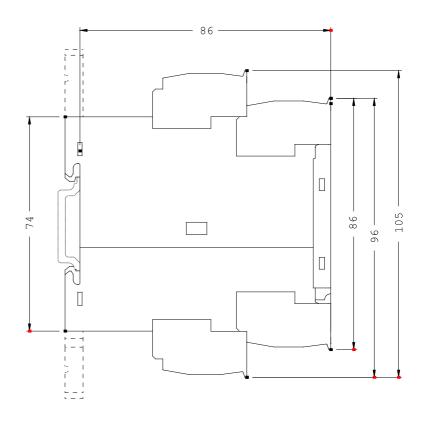

last change:

Oct 24, 2011