

CONTACTOR, 75KW/400V/AC-3,
AC(40...60HZ)/DC OPERATION UC 200...277V AUXIL.
CONTACTS 2NO+2NC 3-POLE,
SIZE S6 BAR CONNECTIONS ELECTRONIC OPERATING
MECHANISM WITH PLC INTERFACE 24V DC SCREW
TERMINAL

General details:

Product brand name		SIRIUS
product designation		power contactor
Size of the contactor		S6
Protection class IP / on the front		IP00
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-25 ... 60
Active power loss / per conductor / typical	W	9
Item designation <ul style="list-style-type: none"> • according to DIN EN 61346-2 • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		Q K
Mechanical operating cycles as operating time <ul style="list-style-type: none"> • of the contactor / typical • of the contactor with added auxiliary switch block / typical • of the contactor with added electronics-compatible auxiliary switch block / typical 		10,000,000 10,000,000 5,000,000

Main circuit:

Number of poles / for main current circuit		3
Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		3
Operating current / at AC-1 / at 400 V / at 40 °C ambient temperature / rated value	A	185
Operating current / at AC-1 / at 400 V / at 60 °C ambient temperature / rated value	A	160
Operating current <ul style="list-style-type: none"> • at AC-3 / at 400 V / rated value • with 1 current path • at DC-1 	A	150

• at 24 V / rated value	A	160
• at 110 V / rated value	A	18
• at DC-3 / at DC-5		
• at 24 V / rated value	A	160
• at 110 V / rated value	A	2.5
• with 2 current paths in series		
• at DC-1		
• at 24 V / rated value	A	160
• at 110 V / rated value	A	160
• at DC-3 / at DC-5		
• at 24 V / rated value	A	160
• at 110 V / rated value	A	160
• with 3 current paths in series		
• at DC-1		
• at 24 V / rated value	A	160
• at 110 V / rated value	A	160
• at DC-3 / at DC-5		
• at 24 V / rated value	A	160
• at 110 V / rated value	A	160
Service power		
• at AC-1 / at 400 V / rated value	kW	105
• at AC-2 / at 400 V / rated value	kW	84
• at AC-3		
• at 400 V / rated value	kW	75
• at 500 V / rated value	kW	105
• at 690 V / rated value	kW	146

Control circuit:		
Design of activation		solid-state, for 24 V DC PLC output
Design of the surge suppressor		with varistor
Type of voltage / of the controlled supply voltage		AC/DC
Control supply voltage frequency		
• 1 / rated value	Hz	40
• 2 / rated value	Hz	60
Control supply voltage / 1		
• for DC		
• initial rated value	V	200
• final rated value	V	277
• at 50 Hz / for AC		
• initial rated value	V	200

- final rated value
- at 60 Hz / for AC
- initial rated value
- final rated value

V	277
V	200
V	277

Auxiliary circuit:

Contact reliability / of the auxiliary contacts 1 faulty switching per 100 million (17 V, 1 mA)

Number of NC contacts / for auxiliary contacts

- instantaneous switching
- lagging switching

2
0

Number of NO contacts / for auxiliary contacts

- instantaneous switching
- leading switching

2
0

Operating current / of the auxiliary contacts

- at AC-12 / maximum
- at AC-15
 - at 230 V
 - at 400 V
- at DC-12
 - at 60 V
 - at 110 V
 - at 220 V
- at DC-13
 - at 24 V
 - at 60 V
 - at 110 V
 - at 220 V

A	10
A	6
A	3
A	6
A	3
A	1
A	10
A	2
A	1
A	0.3

Short-circuit:

Design of the fuse link

- for short-circuit protection of the auxiliary switch / required
- for short-circuit protection of the main circuit
 - with type of assignment 1 / required
 - at type of coordination 2 / required

fuse gL/gG: 10 A

fuse gL/gG: 355 A
fuse gL/gG: 315 A

Installation/mounting/dimensions:

Type of mounting		screw fixing
series installation		Yes
Width	mm	120
Height	mm	172
Depth	mm	180

Distance, to be maintained, to earthed part / sideways	mm	10
--	----	----

Connection type:

Design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals

screw-type terminals

Identification number and letter for switching elements

22 E

Certificates/approvals:

General Product Approval

Functional Safety / Safety of Machinery

Test Certificates



CQC



CSA

[ROSTEST](#)



UL

[SUVA](#)

[Manufacturer](#)

Shipping Approval

other



ABS



DNV



GL

[Manufacturer](#)

[other](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1055-6NP36/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1055-6NP36

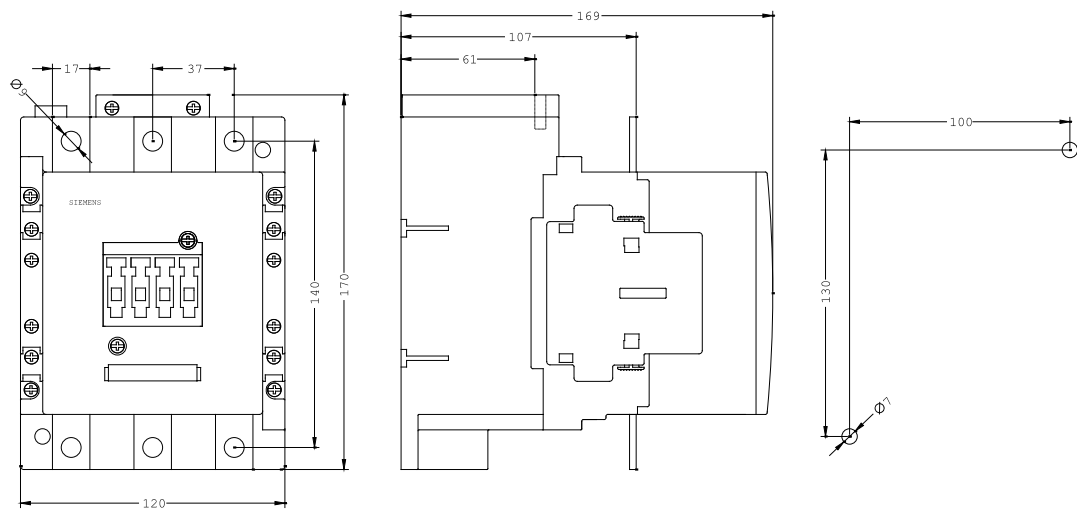

last change:

Sep 30, 2011