



CONTACTOR, 275A/AC-1,  
AC(40...60HZ)/DC OPERATION UC 220...240V AUXIL.  
CONTACTS 2NO+2NC 3-POLE,  
SIZE S6 BAR CONNECTIONS CONVENT. OPERATING  
MECHANISM

### General details:

Product brand name		SIRIUS
product designation		power contactor
Size of the contactor		S6
Protection class IP / on the front		IP00
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-25 ... 60
Active power loss / per conductor / typical	W	20
Item designation		
<ul style="list-style-type: none"> <li>• according to DIN EN 61346-2</li> <li>• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul>		Q K
Mechanical operating cycles as operating time		
<ul style="list-style-type: none"> <li>• of the contactor / typical</li> <li>• of the contactor with added auxiliary switch block / typical</li> <li>• of the contactor with added electronics-compatible auxiliary switch block / typical</li> </ul>		10,000,000 10,000,000 5,000,000

### Main circuit:

Number of poles / for main current circuit		3
--	--	---

Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		3
Operating current / at AC-1 / at 400 V / at 40 °C ambient temperature / rated value	A	275
Operating current / at AC-1 / at 400 V / at 60 °C ambient temperature / rated value	A	250
Operating current		
• at AC-3 / at 400 V / rated value	A	97
• with 1 current path		
• at DC-1		
• at 24 V / rated value	A	250
• at 110 V / rated value	A	18
• at DC-3 / at DC-5		
• at 24 V / rated value	A	250
• at 110 V / rated value	A	2.5
• with 2 current paths in series		
• at DC-1		
• at 24 V / rated value	A	250
• at 110 V / rated value	A	250
• at DC-3 / at DC-5		
• at 24 V / rated value	A	250
• at 110 V / rated value	A	250
• with 3 current paths in series		
• at DC-1		
• at 24 V / rated value	A	250
• at 110 V / rated value	A	250
• at DC-3 / at DC-5		
• at 24 V / rated value	A	250
• at 110 V / rated value	A	250
Service power		
• at AC-1 / at 400 V / rated value	kW	165
• at AC-2 / at 400 V / rated value	kW	55
• at AC-3		
• at 400 V / rated value	kW	55
• at 500 V / rated value	kW	55
• at 690 V / rated value	kW	90
Control circuit:		
Design of activation		conventional
Design of the surge suppressor		with varistor
Type of voltage / of the controlled supply voltage		AC/DC

<b>Control supply voltage frequency</b>		
• 1 / rated value	Hz	40
• 2 / rated value	Hz	60
<b>Control supply voltage / 1</b>		
• for DC		
• initial rated value	V	220
• final rated value	V	240
• at 50 Hz / for AC		
• initial rated value	V	220
• final rated value	V	240
• at 60 Hz / for AC		
• initial rated value	V	220
• final rated value	V	240

<b>Auxiliary circuit:</b>		
<b>Contact reliability / of the auxiliary contacts</b>		1 faulty switching per 100 million (17 V, 1 mA)
<b>Number of NC contacts / for auxiliary contacts</b>		
• instantaneous switching		2
• lagging switching		0
<b>Number of NO contacts / for auxiliary contacts</b>		
• instantaneous switching		2
• leading switching		0
<b>Operating current / of the auxiliary contacts</b>		
• at AC-12 / maximum	A	10
• at AC-15		
• at 230 V	A	6
• at 400 V	A	3
• at DC-12		
• at 60 V	A	6
• at 110 V	A	3
• at 220 V	A	1
• at DC-13		
• at 24 V	A	10
• at 60 V	A	2
• at 110 V	A	1
• at 220 V	A	0.3

<b>Short-circuit:</b>		
<b>Design of the fuse link</b>		
• for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 10 A
• for short-circuit protection of the main circuit		

- with type of assignment 1 / required
- at type of coordination 2 / required

fuse gL/gG: 355 A  
fuse gL/gG: 350 A

#### Installation/mounting/dimensions:

##### Type of mounting

screw fixing

##### series installation

Yes

##### Width

mm 120

##### Height

mm 172

##### Depth

mm 170

##### Distance, to be maintained, to earthed part / sideways

mm 10

#### Connection type:

##### Design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals  
screw-type terminals

##### Identification number and letter for switching elements

22 E

#### Certificates/approvals:

##### General Product Approval

##### Functional Safety / Safety of Machinery

##### Test Certificates



CQC



CSA

[ROSTEST](#)



UL

[SUVA](#)

[Manufacturer](#)

##### Shipping Approval

##### other



ABS



DNV



GL

[Manufacturer](#)

[other](#)

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### CAX-Online-Generator



<http://www.siemens.com/cax>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1456-6AP36/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT1456-6AP36](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1456-6AP36)

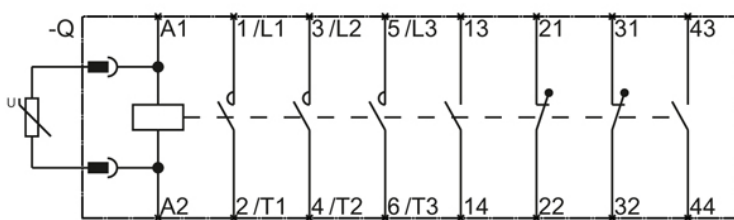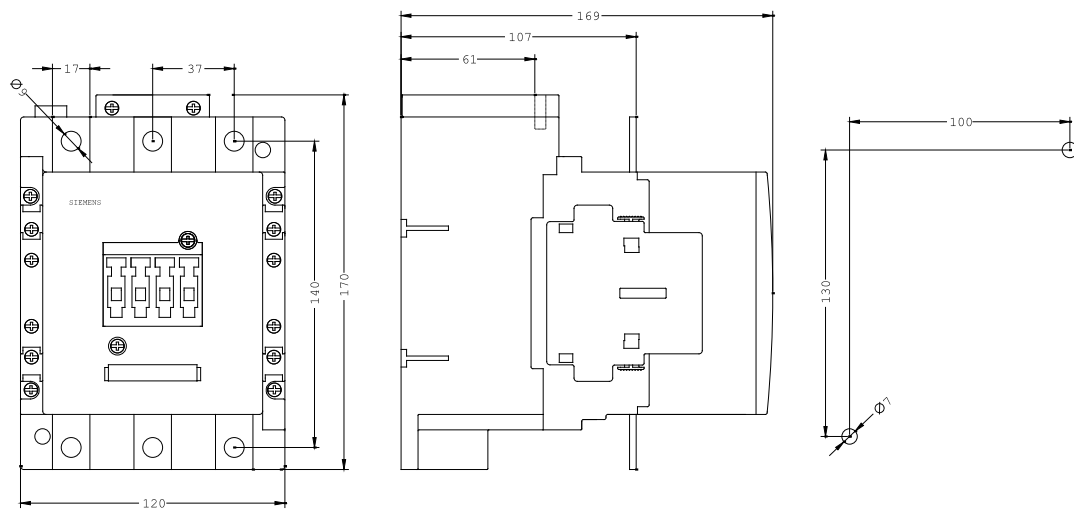

last change:

Sep 30, 2011