



SEMI-COND. CONTACTOR 3RF2,1-PH. AC 51 20 A 40  
DEGREES C 24-230 V / 24 V DC LOW NOISE

### General technical data:

|  |    |                               |
|--|----|-------------------------------|
| Product brand name   |    | SIRIUS                        |
| product designation  |    | solid-state contactor         |
| Product function   |    | low noise                     |
| Number of poles / for main current circuit                                 |    | 1                             |
| Protection class IP  |    | IP20                          |
| Product designation / _3 / of the accessories that can be ordered          |    | converter                     |
| Manufacturer article number / _3 / of the accessories that can be ordered  |    | <a href="#">3RF2900-0EA18</a> |
| Ambient temperature  |    |                               |
| • during operating   | °C | -25 ... 60                    |
| • during storage   | °C | -55 ... 80                    |
| Installation altitude / at a height over sea level / maximum               | m  | 1,000                         |
| Resistance against vibration / according to IEC 60068-2-6                  |    | 2g                            |
| Resistance against shock / according to IEC 60068-2-27                     |    | 15g / 11 ms                   |
| Item designation   |    |                               |
| • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 |    | K                             |
| • according to DIN EN 61346-2  |    | Q                             |
| Number of NC contacts / for auxiliary contacts                             |    | 0                             |

|   |  |   |
|---|--|---|
| Number of NO contacts / for auxiliary contacts          |  | 0 |
| Number of change-over switches / for auxiliary contacts |  | 0 |

#### Main circuit:

|  |                   |                          |
|--|-------------------|--------------------------|
| Number of NO contacts / for main contacts  |                   | 1                        |
| Number of NC contacts / for main contacts  |                   | 0                        |
| Operating current <ul style="list-style-type: none"> <li>• at AC-1 / at 400 V / rated value</li> <li>• at AC-51 / rated value</li> </ul>         | A<br>A            | 20<br>20                 |
| Operating current / minimum  | mA                | 500                      |
| Operating voltage <ul style="list-style-type: none"> <li>• at 50 Hz / at AC / rated value</li> <li>• at 60 Hz / at AC / rated value</li> </ul>   | V<br>V            | 24 ... 230<br>24 ... 230 |
| Working area related to the operating voltage <ul style="list-style-type: none"> <li>• at 50 Hz / for AC</li> <li>• at 60 Hz / for AC</li> </ul> | V<br>V            | 20 ... 253<br>20 ... 253 |
| Operating frequency <ul style="list-style-type: none"> <li>• rated value</li> </ul>  | Hz                | 50 ... 60                |
| Relative symmetrical tolerance / of the operation frequency  | %                 | 10                       |
| Insulation voltage / rated value   | V                 | 600                      |
| Voltage slew rate / at the thyristor / for main contacts / maximum permissible   | V/μs              | 1,000                    |
| Block voltage / at the thyristor / for main contacts / maximum permissible   | V                 | 800                      |
| Reverse current / of the thyristor   | mA                | 25                       |
| Derating temperature   | °C                | 40                       |
| Active power loss / total / typical  | W                 | 20                       |
| Resistance against the impulse current / rated value   | A                 | 600                      |
| I <sup>2</sup> t-level / maximum   | A <sup>2</sup> ·s | 1,800                    |

#### Control circuit:

|   |          |          |
|---|----------|----------|
| Type of voltage / of the controlled supply voltage  |          | DC       |
| Control supply voltage / 1 <ul style="list-style-type: none"> <li>• for DC <ul style="list-style-type: none"> <li>• initial rated value</li> <li>• final rated value</li> </ul> </li> </ul> | V<br>V   | 15<br>24 |
| Control supply voltage <ul style="list-style-type: none"> <li>• for DC / final value for signal&lt;0&gt;-recognition</li> </ul>   | V        | 5        |
| Control current <ul style="list-style-type: none"> <li>• at minimum control supply voltage / for DC</li> <li>• for DC / rated value</li> </ul>  | mA<br>mA | 2<br>15  |

### Installation/mounting/dimensions:



|   |     |  |
|---|-----|--|
| Type of mounting  |     | screw and snap-on mounting onto 35 mm standard mounting rail |
| Type of fixing/fixation / series installation                               |     | Yes  |
| Design of the thread / of the screw for fastening of the operating resource |     | M4   |
| Tightening torque / of the screw for fastening of the operating resource    | N·m | 1.5  |
| Width   | mm  | 22.5   |
| Height  | mm  | 100  |
| Depth   | mm  | 140.5  |

### Connections:

|   |  |  |
|---|--|--|
| Design of the electrical connection / for main current circuit  |  | spring-loaded terminals  |
| <b>Type of the connectable conductor cross-section</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded <ul style="list-style-type: none"> <li>• with conductor end processing</li> <li>• without conductor final cutting</li> </ul> </li> </ul> </li> <li>• for AWG conductors <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• for auxiliary and control contacts</li> </ul> </li> <li>• for auxiliary and control contacts <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded <ul style="list-style-type: none"> <li>• with conductor end processing</li> <li>• without conductor final cutting</li> </ul> </li> </ul> </li> </ul> |  | 2x (0.5 ... 2.5 mm <sup>2</sup> )<br><br>2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br><br>2x (18 ... 14)<br>1x (AWG 20 ... 12)<br><br>0.5 ... 1.5 mm <sup>2</sup><br><br>0.5 ... 2.5 mm <sup>2</sup><br><br>0.5 ... 2.5 mm <sup>2</sup> |
| <b>Conductor cross section that can be connected</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded wire <ul style="list-style-type: none"> <li>• with conductor end processing</li> <li>• without conductor final cutting</li> </ul> </li> </ul> </li> <li>• for auxiliary and control contacts <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded wire</li> </ul> </li> </ul>  | mm <sup>2</sup><br><br><br>mm <sup>2</sup><br>mm <sup>2</sup><br><br>mm <sup>2</sup> | 0.5 ... 2.5<br><br>0.5 ... 0.5<br>0.5 ... 2.5<br><br>0.5 ... 1.5   |

|  |                 |                         |
|--|-----------------|-------------------------|
| • with conductor end processing / minimum  | mm <sup>2</sup> | 0.5 ... 2.5             |
| • without conductor final cutting  | mm <sup>2</sup> | 0.5 ... 2.5             |
| <b>AWG number / as coded connectable conductor cross-section / for main contacts</b>                     |                 | 14 ... 18               |
| <b>Design of the electrical connection / for auxiliary and control current circuit</b>                   |                 | spring-loaded terminals |
| <b>AWG number / as coded connectable conductor cross-section</b><br>• for auxiliary and control contacts |                 | 20 ... 12               |
| <b>Skinning length / of the cable / for main contacts</b>  | mm              | 7                       |
| <b>Skinning length / of the cable / for auxiliary and control contacts</b>                               | mm              | 7                       |

#### Certificates/approvals:

| General Product Approval  | Test Certificates            | other                        |
|---|------------------------------|------------------------------|
|  <a href="#">ROSTEST</a>  | <a href="#">Manufacturer</a> | <a href="#">Manufacturer</a> |

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### CAX-Online-Generator





<http://www.siemens.com/cax>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RF2320-2CA02/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RF2320-2CA02](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RF2320-2CA02)

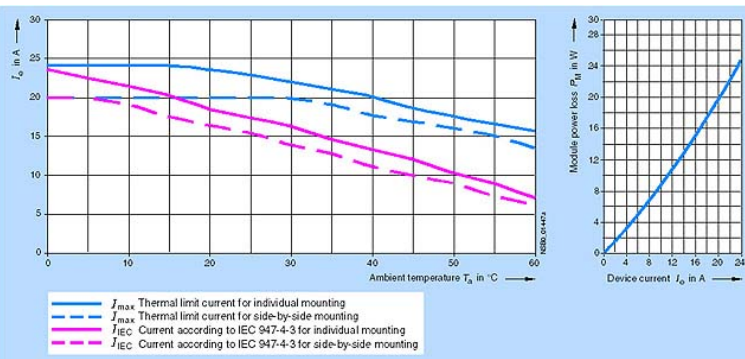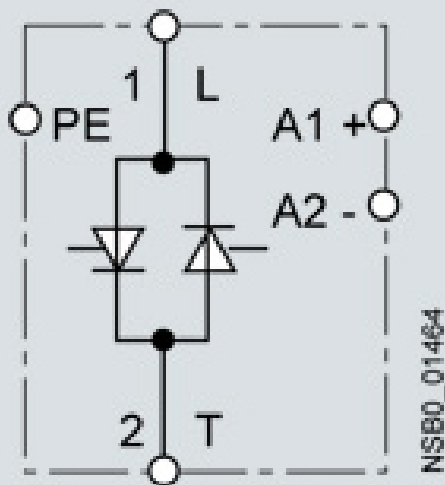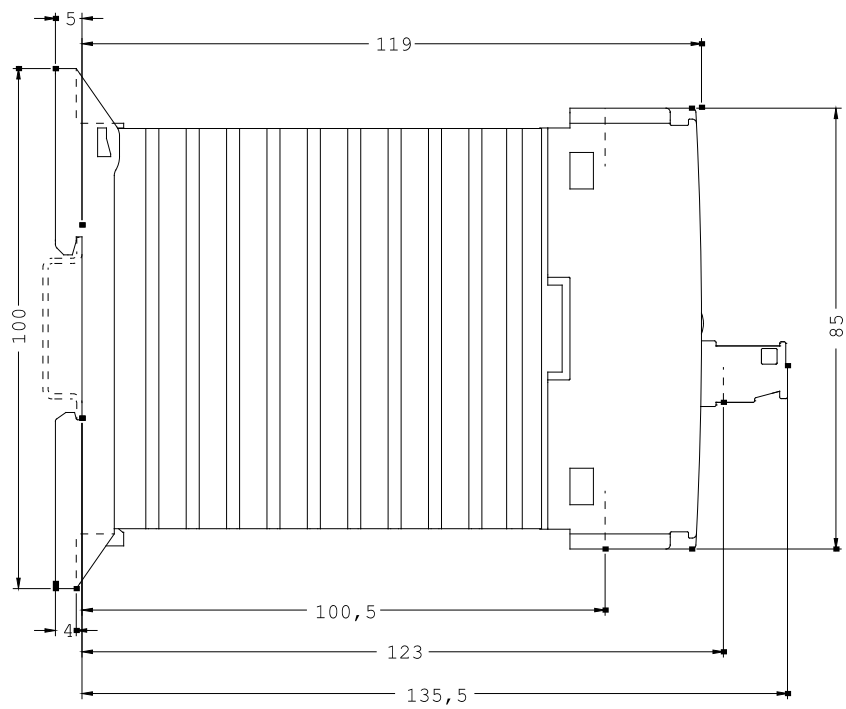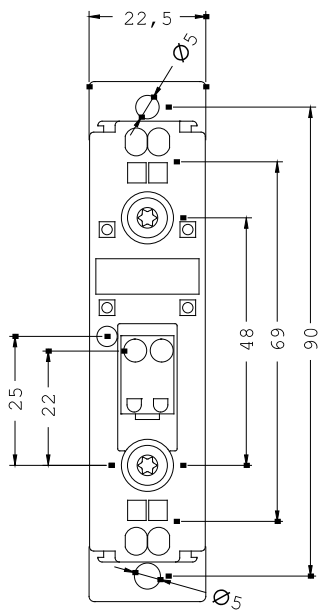



last change:

Aug 22, 2011