

CONNECTION CABLE;  
LENGTH 0,5M;  
FLAT;  
CONNECTION OF BASIC UNIT TO CURRENT  
MEASURING MODULE,  
CURRENT/VOLTAGE MEASUR. MODULE,  
OPERATOR PANEL OR TO EXPANSION MODULES VIA  
SYSTEM INTERFACE

### General technical data:

<b>Product brand name</b>		SIRIUS
<b>product designation</b>		connecting cable
<b>Ambient temperature</b>		
• during storage	°C	-40 ... 80
• during operating	°C	-25 ... 60
• during transport	°C	-40 ... 80
<b>Relative humidity</b>		
• during operating phase	%	5 ... 95

### Certificates/approvals:

<b>Verification of suitability</b>	CE / UL / CSA / CCC / C-TICK / GOST / NOM / RoHS
------------------------------------	--

### General Product Approval



CQC

[ROSTEST](#)

### For use in hazardous locations

[CQST](#)

### Test Certificates

[Manufacturer](#)

### Shipping Approval



ABS



BUREAU  
VERITAS



DNV



GL



PRS

### other

[Manufacturer](#)

[PNO](#)

[other](#)

### Further information:

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

#### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

#### CAX-Online-Generator


<http://www.siemens.com/cax>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3UF7932-0AA00-0/all>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3UF7932-0AA00-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3UF7932-0AA00-0)

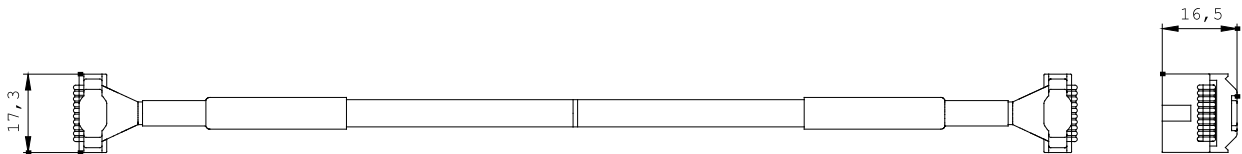

last change:

Oct 24, 2011