

PLUG-IN RELAY COMPACT UNIT AC 230V,
1 CO CONTACT LED MODULE RED STANDARD PLUG-IN
SOCKET 5 MM PINNING

General technical details:

Supply voltage frequency / for auxiliary and control current circuit / rated value

- minimum
- maximum

Hz
Hz

50
60

type of voltage

AC

Control supply voltage

- at 50 Hz / at AC / rated value
 - minimum
 - maximum
- at 60 Hz / at AC / rated value
 - minimum
 - maximum

V
V
V
V

230
230
230
230

Number of NC contacts

- for auxiliary contacts

0

Number of NO contacts

- for auxiliary contacts

0

Number of change-over switches

- for auxiliary contacts

1

Operating current / of the auxiliary contacts

- at AC-15
- at 230 V

A

3

Design of the switching function

- guided

changeover switch
No

Switching behaviour

monostable

Mechanical design:

Design of the electrical connection

screw-type terminals

Design of the relay operating mechanism

poled

Product component / jumper socket

Yes

Width

mm

15.5

Height

mm

71

Depth

mm

78

Certificates/approvals:

**General Product
Approval**

[ROSTEST](#)

other

[Manufacturer](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/LZS:RT3A4T30/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=LZS:RT3A4T30

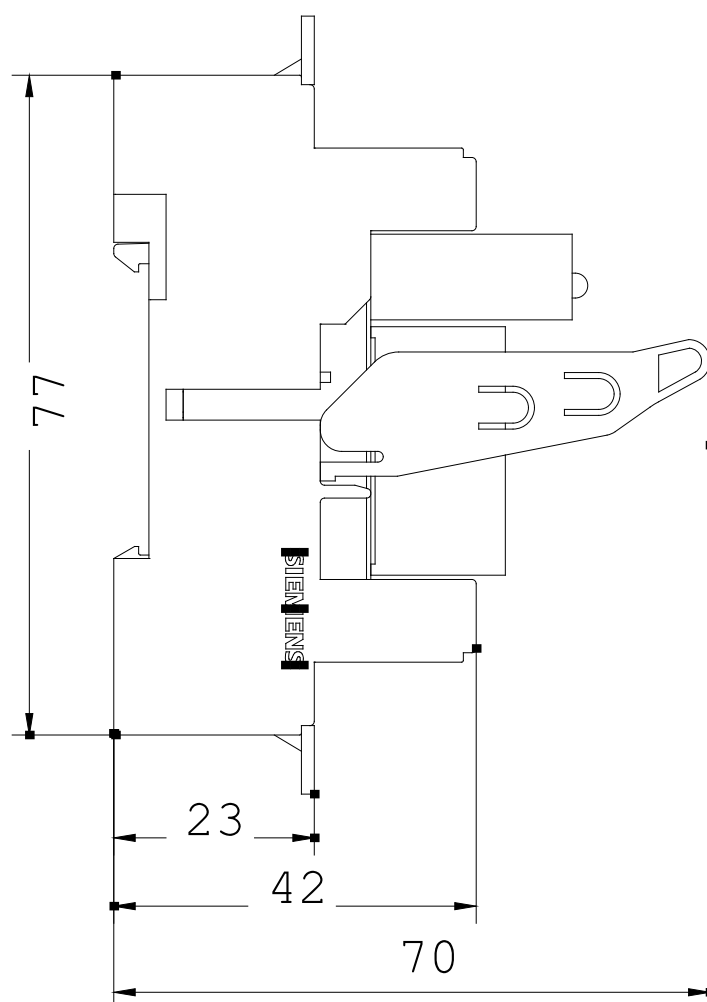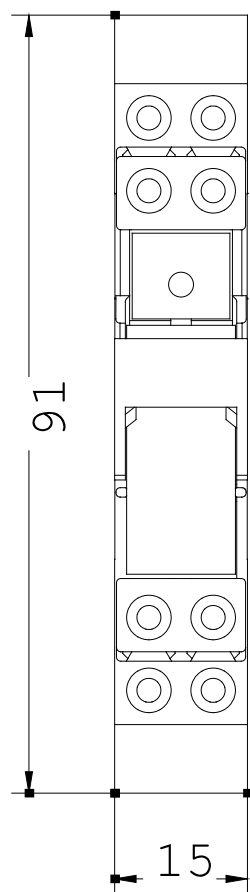

last change:

Oct 24, 2011