

LENGTH-ADJUSTABLE TWIST LEVER FOR POSITION
SWITCH 3SE51/52 METAL LEVER 100MM LONG,
POSITIVE FIT (HOLE PITCH) PLASTIC ROLLER 19MM

General technical details:

product designation		actuator for part-turn actuator
Mechanical operating cycles as operating time		
• typical		15,000,000
Resistance against vibration		0.35 mm / 5g
Resistance against shock		30g / 11 ms
Ambient temperature		
• during operating	°C	-25 ... +85
• during storage	°C	-40 ... +90
Design of the operating mechanism		metal lever, adjustable length with closing shape, plastic roller 19 mm
Built in orientation		any
Item designation		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		E
• according to DIN EN 61346-2		T

Certificates/approvals:

General Product Approval

Functional Safety / Safety of Machinery

Test Certificates



CQC



CSA

[ROSTEST](#)



VDE

[TÜV](#)

[Manufacturer](#)

other

[Manufacturer](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator

<http://www.siemens.com/cax>

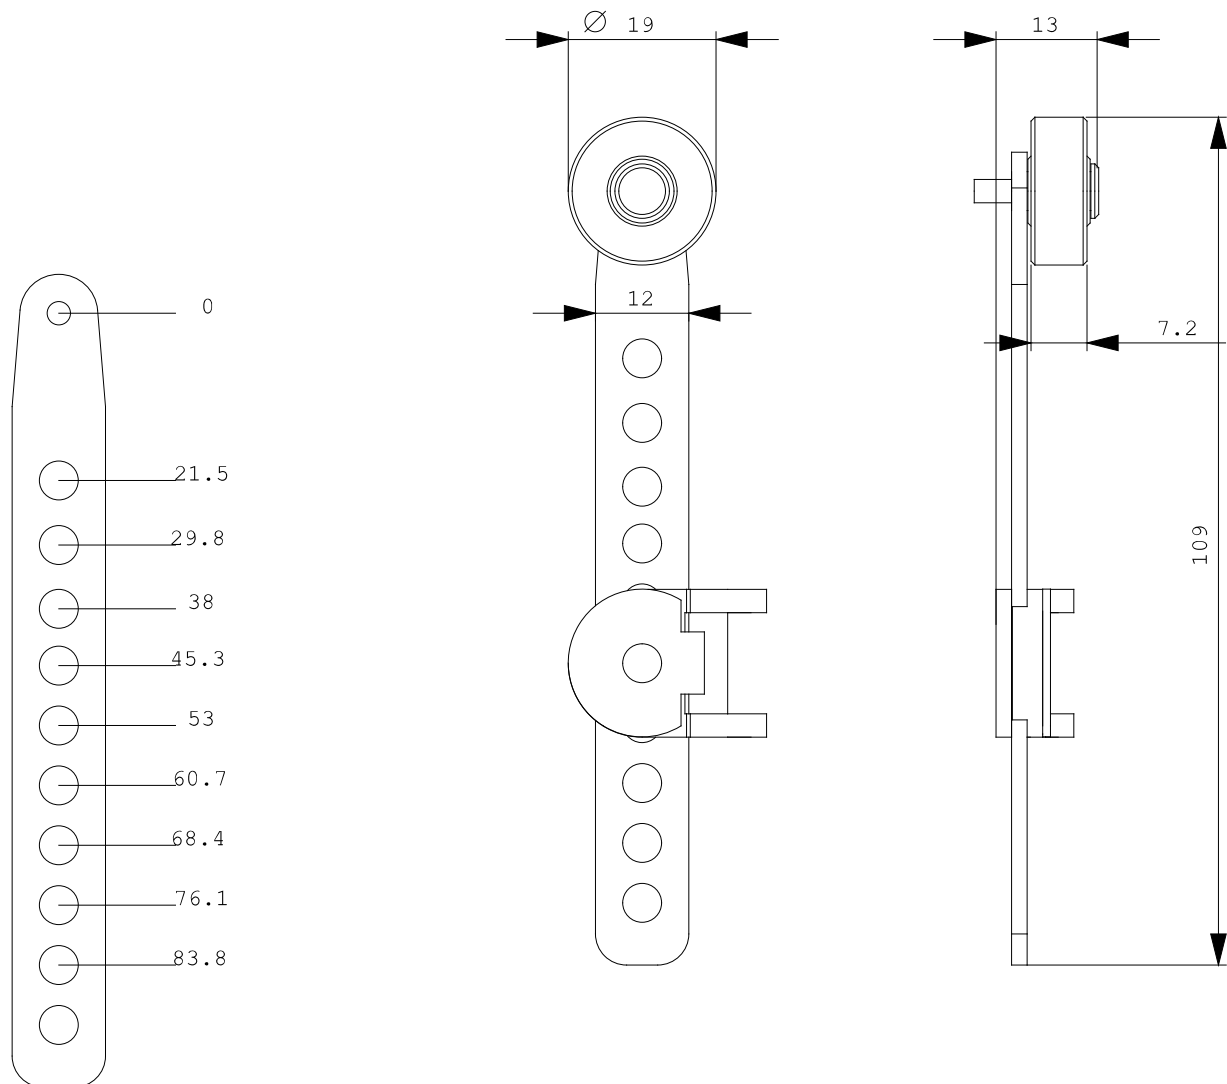

last change:

Nov 28, 2011