

ACTUATOR HEAD FOR POSITION SWITCH 3SE51/52  
ANGULAR ROLLER LEVER,  
METAL LEVER WITH STAINLESS STEEL ROLLER 22MM



### General technical details:

<b>product designation</b>		actuator head for position switch
<b>Mechanical operating cycles as operating time</b>		
• typical		15,000,000
<b>Resistance against vibration</b>		0.35 mm / 5g
<b>Resistance against shock</b>		30g / 11 ms
<b>Ambient temperature</b>		
• during operating	°C	-25 ... +85
• during storage	°C	-40 ... +90
<b>material / of the housing</b>		
• of the switch head		metal
<b>Design of the operating mechanism</b>		metal lever, stainless steel roller
<b>Minimum actuating force / in activation direction</b>	N	10
<b>Built in orientation</b>		any
<b>Item designation</b>		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		E
• according to DIN EN 61346-2		T

### Certificates/approvals:

## General Product Approval

## Functional Safety / Safety of Machinery

## Test Certificates



CQC



CSA

[ROSTEST](#)



VDE

[TÜV](#)

[Manufacturer](#)

### other

[Manufacturer](#)

### Further information:

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

#### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

#### CAX-Online-Generator


<http://www.siemens.com/cax>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE5000-0AF02/all>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3SE5000-0AF02](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5000-0AF02)

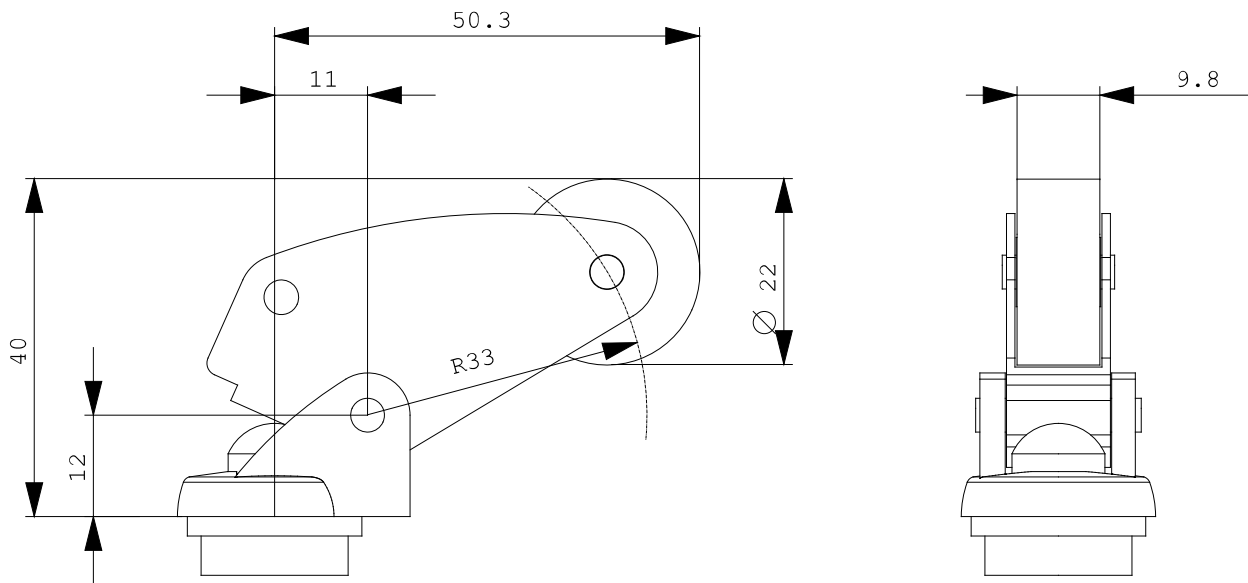

last change:

Nov 28, 2011