






SIRIUS POSITION SWITCH METAL ENCLOSURE 40MM TO EN50041 1NO/ 1NC SNAP-ACTION CONTACTS W. M12 CONNECTOR, 5-POLE, FIXED PIN ASSIGNMENT: PIN1=21, PIN2=22, PIN3=13, PIN4=14, PIN5=PE ROTARY ACTUATOR RIGHT AND/ OR LEFT ADJUSTABLE, METAL LEVER 27 MM LONG AND PLASTIC ROLLER 19MM

<b>Manufacturer article number</b>		
• of the basic unit included in the scope of supply		<a href="#">3SE5114-0CA00-0AC5</a>
• of the actuator head for position switches included in the scope of supply		<a href="#">3SE5000-0AH00</a>
• of the operating lever included in the scope of supply		<a href="#">3SE5000-0AA01</a>

General technical details:		
product designation		standard position switch
Insulation voltage		
• rated value	V	125
Degree of pollution		class 3
Thermal current	A	4
Operating current		
• at AC-15		
• at 24 V / rated value	A	4
• at 125 V / rated value	A	4
• at DC-13		
• at 24 V / rated value	A	3
• at 125 V / rated value	A	0.55
Continuous current		
• of the slow DIAZED fuse link	A	4
• of the quick DIAZED fuse link	A	4

• of the C characteristic circuit breaker	A	1
<b>Mechanical operating cycles as operating time</b>		
• typical		15,000,000
<b>Electrical operating cycles as operating time</b>		
• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 / typical		10,000,000
<b>Electrical operating cycles in one hour</b>		
• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026		6,000
<b>Repeat accuracy</b>	mm	0.05
<b>Design of the contact element</b>		snap-action contacts
<b>Number of NC contacts</b>		
• for auxiliary contacts		1
<b>Design of the switching function</b>		positive opening
<b>Number of NO contacts</b>		
• for auxiliary contacts		1
<b>Resistance against vibration</b>		0.35 mm / 5g
<b>Resistance against shock</b>		30g / 11 ms
<b>Ambient temperature</b>		
• during operating	°C	-25 ... 85
• during storage	°C	-40 ... 90
<b>Product specification</b>		
• for dimensions		EN 50041
<b>Width of the sensor</b>	mm	40
<b>material</b>		
• of the housing		metal
<b>Material / of the housing / of the switch head</b>		metal
<b>Design of the operating mechanism</b>		metal lever, 27 mm long, step 9 mm, plastic roller 19 mm
<b>Actuating speed</b>	mm/s / m/s	0.1 ... 1.5
<b>Protection class IP</b>		IP66/IP67
<b>Built in orientation</b>		any
<b>Cable gland version</b>		M12 plug
<b>Design of the electrical connection</b>		M12 plug, fixed
<b>Design of the plug-in connection</b>		M12 plug, 5-pole: Pin 1 = terminal 21, Pin 2 = 22, Pin 3 = 13, Pin 4 = 14, Pin 5 = PU
<b>Item designation</b>		
• according to DIN 40719 extendable after IEC 204-2		S
• according to DIN EN 61346-2		B

#### Certificates/approvals:

General Product Approval			Functional Safety / Safety of Machinery	
 CQC	<a href="#">ROSTEST</a>	 UL	 VDE	<a href="#">TÜV</a>
Test Certificates		other		
<a href="#">Manufacturer</a>	<a href="#">other</a>	<a href="#">Manufacturer</a>		

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### CAX-Online-Generator

<http://www.siemens.com/cax>


##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE5114-0CH01-1AC5/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3SE5114-0CH01-1AC5](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5114-0CH01-1AC5)



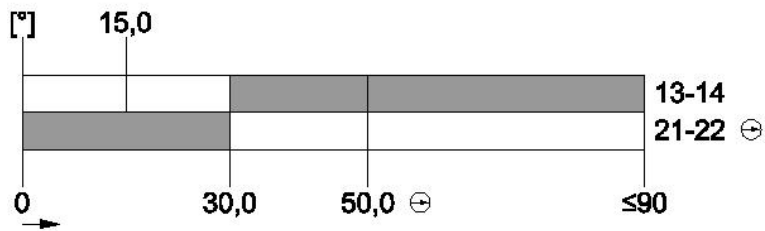

last change:

Nov 24, 2011