SIEMENS

Product data sheet 8WD4420-0FA



SIGNALLING COLUMN BUZZER ELEMENT CONTINUOUS SOUND OR PULSED ADJUSTABLE, 24V AC/DC

General technical details:			
Product brand name		SIRIUS	
product designation		signaling columns element, accoustic	
Type of voltage			
of the supply voltage			
of the acoustic signal element		AC/DC	
Consumed current / for rated value of supply voltage	mA	25	
Supply voltage / 1 / of the acoustic signal element			
• at 50 Hz / for AC / rated value	V	24	
• at 60 Hz / for AC / rated value	V	24	
• for DC / rated value	V	24	
Design of the acoustic signal type		continuous tone / pulse tone	
Loudness level	dB	80	
Item designation			
 according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		н	
according to DIN EN 61346-2		P	

Ambient conditions:			
Ambient temperature			
during operating	°C	-20 +50	
Protection class IP		IP65	
Product function / adjustable acoustic signal		Yes	
Depth	mm	70	
Height	mm	56	
Width	mm	70	

Certificates/approvals:

General Product Approval Shipping Approval

other

ROSTEST





Manufacturer

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator:


http://www.siemens.com/cax


 ${\bf Service \& Support~(Manuals,~Certificates,~Characteristics,~FAQs,...)}$

http://support.automation.siemens.com/WW/view/en/8WD4420-0FA/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WD4420-0FA}$

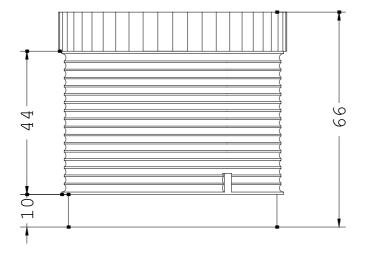

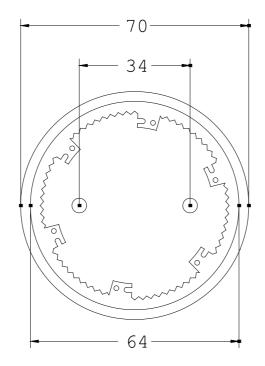

last change: Nov 4, 2011