



SIGNALLING COLUMN STEADY LIGHT GREEN,  
12...240V AC/DC

| General technical details:   |    |                                    |
|--|----|------------------------------------|
| <b>Product brand name</b>  |    | SIRIUS                             |
| <b>product designation</b>   |    | signaling columns element, optical |
| <b>Product component / fluorescent materials</b>   |    | No                                 |
| <b>Design of the optical signal</b>  |    | continous light                    |
| <b>Type of voltage</b>   |    | AC/DC                              |
| <ul style="list-style-type: none"> <li>• of the operating voltage</li> </ul>   |    | AC/DC                              |
| <b>Operating frequency</b>   |    |                                    |
| <ul style="list-style-type: none"> <li>• 1 / rated value</li> </ul>  | Hz | 50                                 |
| <ul style="list-style-type: none"> <li>• 2 / rated value</li> </ul>  | Hz | 60                                 |
| <b>Operating voltage</b>   |    |                                    |
| <ul style="list-style-type: none"> <li>• for DC / rated value</li> </ul>   | V  | 230 ... 12                         |
| <ul style="list-style-type: none"> <li>• at 50 Hz / at AC / rated value</li> </ul>   | V  | 12 ... 230                         |
| <ul style="list-style-type: none"> <li>• at 60 Hz / at AC / rated value</li> </ul>   | V  | 12 ... 230                         |
| <b>Supply voltage</b>  |    |                                    |
| <ul style="list-style-type: none"> <li>• of the fluorescent material / at 50 Hz / for AC / rated value</li> </ul>            | V  | 12 ... 230                         |
| <ul style="list-style-type: none"> <li>• of the fluorescent material / at 60 Hz / for AC / rated value</li> </ul>            | V  | 12 ... 230                         |
| <ul style="list-style-type: none"> <li>• of the fluorescent material / for DC / rated value</li> </ul>                       | V  | 12 ... 230                         |
| <b>Item designation</b>  |    |                                    |
| <ul style="list-style-type: none"> <li>• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul> |    | H                                  |

- according to DIN EN 61346-2

P

#### Mechanical design:

**Color / of the optical signal element**

green

**External diameter / of the signal column element**

mm

70

#### Lamp:

**Nature of fluorescent material**

filament lamp / LED

#### Ambient conditions:

**Ambient temperature**

- during operating

°C

-20 ... +50

**Protection class IP**

IP65

**Depth**

mm

70

**Height**

mm

56

**Width**

mm

70

#### Certificates/approvals:

**General Product Approval**

**Shipping Approval**

**other**

[ROSTEST](#)



[Manufacturer](#)

#### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**Cax online generator:**



<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/8WD4400-1AC/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8WD4400-1AC](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WD4400-1AC)

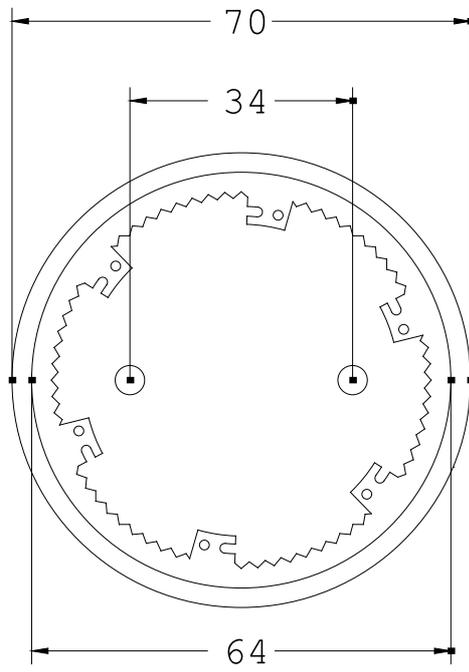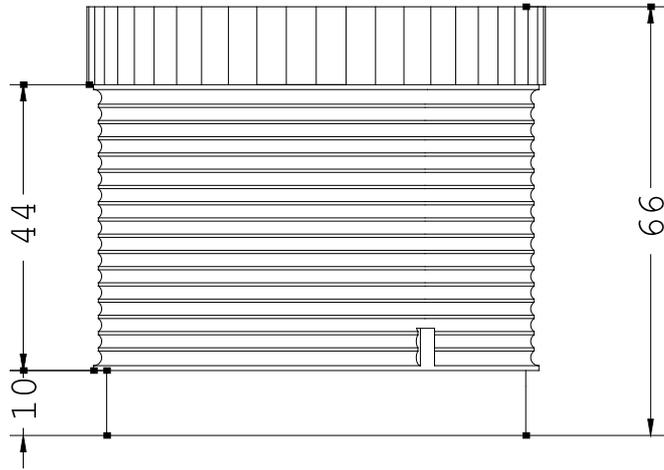

last change:

Nov 4, 2011