



SILIZED FUSE LINK 400 V
GR, SEMICOND. PROTECT. GR. D02 50 A

Similar to image

Technical data:

Operating class of the fuse link		gR (complete converter protection)
Color coding of the fuse link		others
Size of the fallback-system / acc. to DIN EN 60269-1		D02
Operating voltage / rated value	V	400
Operating current / rated value	A	50

Certificates/approvals:

General Product Approval	other
--------------------------	-------



GOST

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5SE1350/all>

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

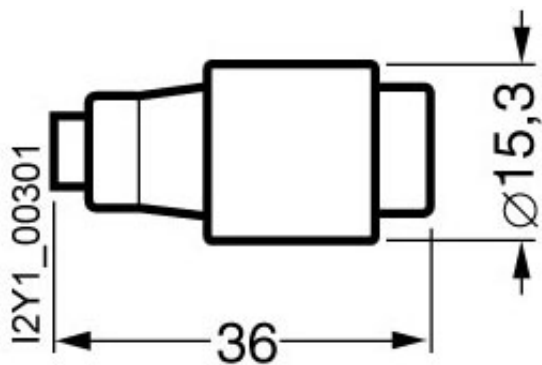

last change:

Mar 17, 2014