



SITOR FUSE-LINK FOR SEMICONDUCTOR PROTECTION  
450A AR 1000V SIZE 3 CONNECTION CONTACT  
INDICATOR 130MM

Similar to image

| Technical data:                                      |    |             |
|------------------------------------------------------|----|-------------|
| Current / for AC / rated value                       | A  | 450         |
| Size of the fallback-system / acc. to DIN EN 60269-1 |    | NH3         |
| Supply voltage                                       |    |             |
| • for AC / rated value                               | V  | 1,000       |
| • for DC                                             | V  | 440         |
| Switching capacity current                           |    |             |
| • in accordance with IEC 60947-2 / rated value       | kA | 50          |
| Design of an identification indicator                |    | others      |
| Ambient temperature                                  | °C | -20 ... +50 |
| Varying load factor (WL)                             |    | 1           |

| Certificates/approvals:  |                           |
|--------------------------|---------------------------|
| General Product Approval | Declaration of Conformity |



Further information:

---

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

---

**Industry Mall (Online ordering system)**

<http://www.siemens.com/lowvoltage/mall>

---

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3NE3635-0C/all>

---

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NE3635-0C](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE3635-0C)

---

**CAX-Online-Generator**

<http://www.siemens.com/cax>

---

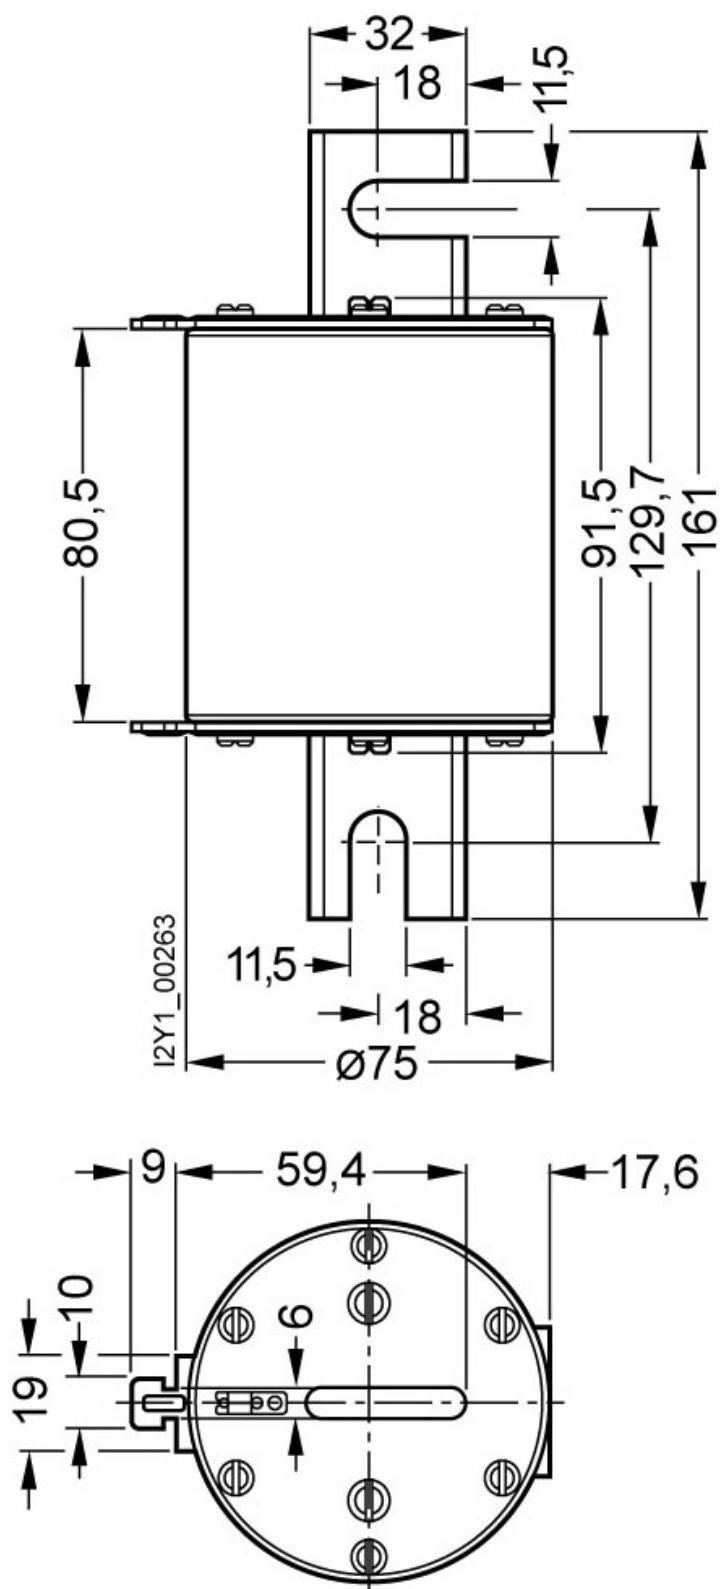

last change:

Jul 1, 2013