## SIEMENS


Product data sheet


ASISAFE ENHANCED SAFETY MONITOR 1 F-RO, 1 ENABLING CIRCUIT, IP20, WITH SCREW-TYPE TERMINALS (REMOVABLE), SAFE OUTPUT RELAY RESPONSE TIME MAX. 50 MS, MONITOR TYPE 3, VERSION 3, APPLICABLE UP TO CATEGORY 4 (EN 954-1), UP TO PL E (EN ISO 13849-1), UP TO SIL 3 (IEC 61508), FOR AS-INTERFACE / AS-I SAFETY AT WORK

Design of the product		safety monitor, special version	
Protocol / is supported / AS interface protocol	_	Yes	
Туре	_	1 enabling circuit	
Number of release circuits	_	1	
Response time / max.	ms	50	
Design of the electrical connection / of the inputs and outputs		screw terminal	
Rated operational current le	_		
• AC-12, 50/60 Hz / 250 V	А	3	
• AC-15, 50/60 Hz			
• 115 V	А	3	
• 230 V	А	3	
• DC-12 (DC-1) / 24 V	А	3	
• DC-13 (DC-11)			
• 24 V	А	1	
• 115 V	А	0.1	
• 230 V	А	0.05	
Reference code			
<ul> <li>according to DIN 40719 extended according to IEC 204-2 / according to IEC 750</li> </ul>		A	
according to DIN EN 61346-2		F	
Ambient conditions:			
Ambient temperature			
during operating	°C	6020	
during storage	°C	7030	
Protection class IP		IP20	

Width			mm 4	5	
Height			mm 1	08	
Depth			mm 12	20	
Mounting type		S	screws / standard rail		
Certificates/appro	ovals:				
General Product A	Approval				Functional Safety / Safety of Machinery
(SA)	EHC	GOST	TUV		
Declaration of Co	nformity				
EG-Konf.					
Shipping Approva	al				
ABS		Lloyd's Register	PRS	RINA	RMRS
other					
Confirmation	Declaration of Conformity	Environmental Confirmations			
Further informati	on:				
	ownloadcenter (Catal com/industrial-controls				
	ne ordering system) com/industrial-controls	/mall			
CAx-Online-Genera					
Service&Support (N	Manuals, Certificates, ation.siemens.com/WW	Characteristics, FAQs,.	)		

 $\underline{http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3RK1105-1AE04-3CA0}$ 

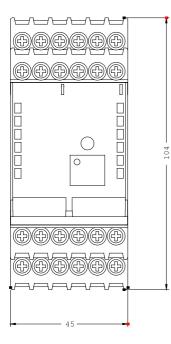

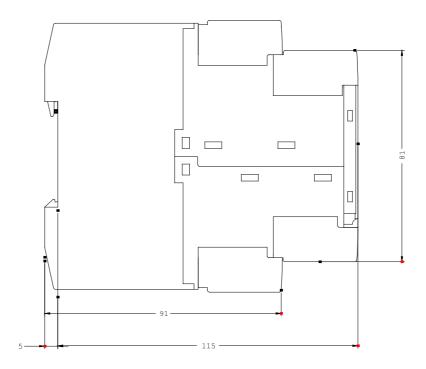

last change:

Mar 17, 2014