

SITOR SWITCH DISCONNECTOR 10X38, UP TO 32 A,
690 V AC



Figure similar

Model		
product brand name		SETRON
Design of the operating mechanism		others
General technical data		
Number of poles		1
Size of fuse link		Other
Protection class		
Protection class IP / on the front		Other
Electricity		
Continuous current / rated value	A	32
Main circuit		
Operating voltage / at AC / rated value / maximum	V	690
Suitability		
Suitability for use		
• Main switch		No
• switch disconnecter		Yes
• EMERGENCY OFF switch		No

- safety switch

Yes

Product function

Product function / fuse monitoring

No

Short circuit

Conditional short-circuit current (I_q) / rated value

kA

50

Connections

Connectable conductor cross-section / stranded

- minimum
- maximum

mm²

1.5

mm²

25

Connectable conductor cross-section / solid

- minimum
- maximum

mm²

1.5

mm²

25

Type of electrical connection / for main current circuit

screw-type terminals

Mechanical Design

Height

mm

58

Depth

mm

85

Mounting type

- floor mounting
- front mounting
- rail mounting

No

Yes

No

General Product Approval

other



CCC



CSA



UL



[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NC1091>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NC1091/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC1091

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

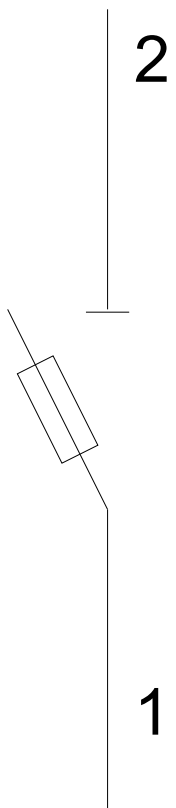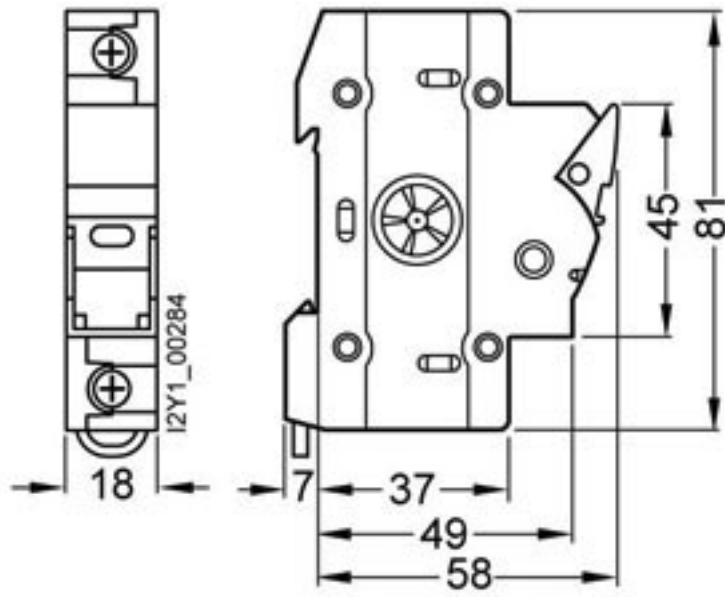

last modified:

12.04.2016