

### PLUG-IN BASE FOR PT-RELAY 4 CHANGEOVER CONTACTS, WITH LOGICAL DISCONNECTION

#### General technical details:

<b>Number of NC contacts</b> • for auxiliary contacts		0
<b>Number of NO contacts</b> • for auxiliary contacts		0
<b>Number of change-over switches</b> • for auxiliary contacts		0
<b>Design of the switching function</b> • guided		changeover switch No
<b>Switching behaviour</b>		monostable

#### Mechanical design:

<b>Design of the electrical connection</b>		screw-type terminals
<b>Design of the relay operating mechanism</b>		poled
<b>Product component / jumper socket</b>		Yes
<b>Width</b>	mm	28

#### Certificates/approvals:

General Product Approval

other

[ROSTEST](#)



UL

[Manufacturer](#)

#### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**CAX-Online-Generator**


<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/LZS:PT78742/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=LZS:PT78742](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=LZS:PT78742)

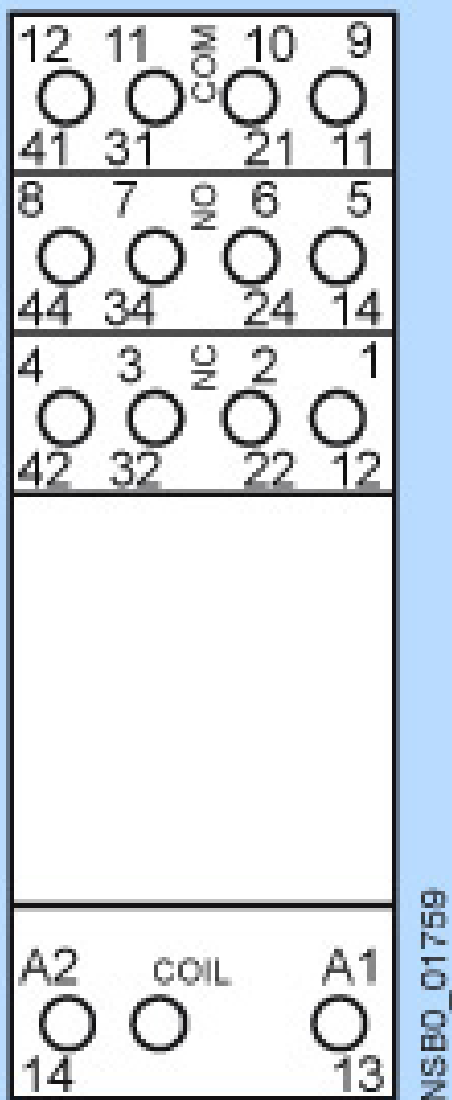

last change:

Oct 24, 2011