SIEMENS

Product data sheet 3RV2915-5B



3-PHASE INFEED TERMINAL, FOR 3-PHASE BUSBAR, SZ SO UND S00, CONNECTION FROM BELOW

General technical data:				
product brand name		SIRIUS		
Product designation		3-phase infeed terminals size S0/S00		
Size of the circuit-breaker		S00, S0		
Protection class IP / on the front		IP20		
Insulation voltage / with degree of pollution 3				
• rated value	V	690		
Ambient temperature				
during storage	°C	-50 +80		
during operating	°C	-20 +60		
Current-carrying capacity / maximum	Α	63		

Installation/mounting/dimensions:				
Width	mm	42.8		
Height	mm	73.5		
Depth	mm	48		
Acceptability for application / makes the assembly of self- protected combination motor controllers (type E) according to UL 508 possible		No		

Connections:				
Design of the electrical connection				
for main current circuit		screw-type terminals		
Type of the connectable conductor cross-section				
for main contacts				

solid
 1x (2.5 ... 16 mm²)
 stranded
 finely stranded
 with conductor end processing
 1x (2.5 ... 25 mm²)
 1x (2.5 ... 16 mm²)

Certificates/approvals:

• for AWG conductors / for main contacts

Verification of suitability CE / UL / CSA / CCC

General Product Approval

Declaration of Conformity

Test Certificates





Special Test Certificate Type Test
Certificates/Test
Report

Shipping Approval











1x (10 ... 4)



Shipping Approval







Confirmation



other

Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

 $\underline{\text{http://www.siemens.com/industrial-controls/catalogs}}$

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator:


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3RV2915-5B/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV2915-5B

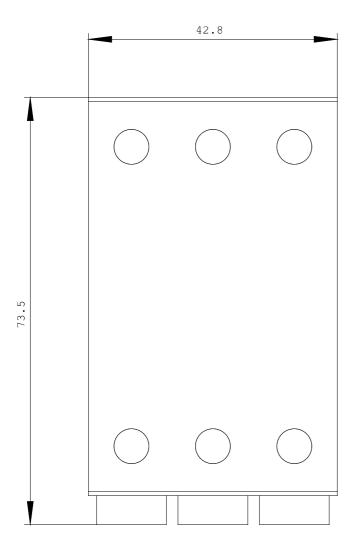

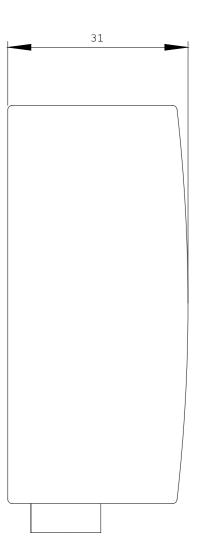

last change: Mar 17, 2014