SIEMENS

Product data sheet



LATERAL AUXILIARY SWITCH 2NC, SCREW CONNECTION, FOR CIRCUIT-BREAKERS, SZ S00/S0

	SIRIUS
	auxiliary switch, lateral
	lateral auxiliary switches
	S00
	IP20
°C	-50 80
°C	-20 60
	2
	0
	0
А	10
А	10
	°C


• at 400 V	А	10
• at 690 V	А	10
• maximum	А	10
• at AC-15		
• at 24 V	А	6
• at 230 V	А	4
• at 690 V	А	1
• at 400 V	А	3
• at DC-13		
• at 24 V	А	2
• at 110 V	А	0.5
• at 125 V	А	0.5
• at 220 V	А	0.25
• at 250 V	А	0.25


Installation/mounting/dimensions:


Type of mounting		plug-in fixing
Width	mm	9.5
Height	mm	90
Depth	mm	70

Connections:				
Design of the electrical connection				
for auxiliary and control current circuit		screw-type terminals		
Type of the connectable conductor cross-section				
for auxiliary contacts				
• solid		2x (0.5 1.5 mm2), 2x (0.75 2.5 mm2)		
finely stranded				
with conductor end processing		2x (0.5 1.5 mm2), 2x (0.75 2.5 mm2)		
 for AWG conductors / for auxiliary contacts 		2x (20 14)		
Cortificates/approvales				
Certificates/approvals:				
Verification of suitability		CE / UL / CSA / CCC		

General Product	eneral Product Approval			Test Certificates			
CQC	(SA) CSA		Manufacturer	Manufacturer			
Shipping Approv	al						
ABS	GL	Lloyd's Register	PRS	RINA	RMRS		
other							
Manufacturer Further informat	other ion:						
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/industrial-controls/catalogs							
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall							
CAx-Online-Generator http://www.siemens.com/cax							
Service&Support (Manuals, Certificates, Characteristics, FAQs,) http://support.automation.siemens.com/WW/view/en/3RV2901-1C/all							
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams,) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV2901-1C							

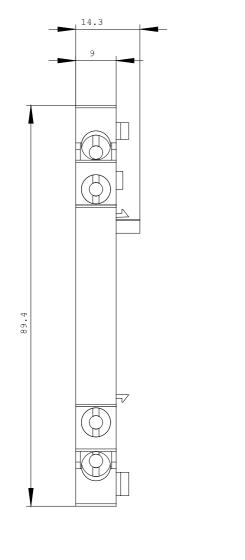

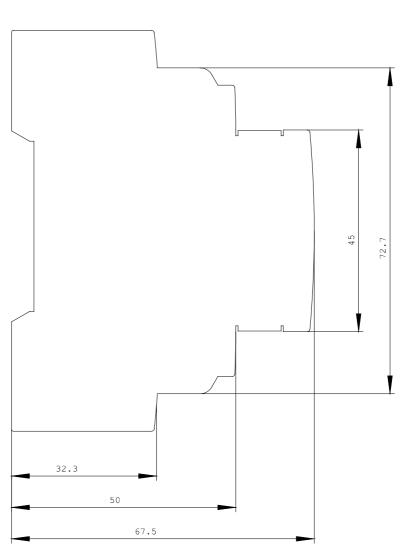

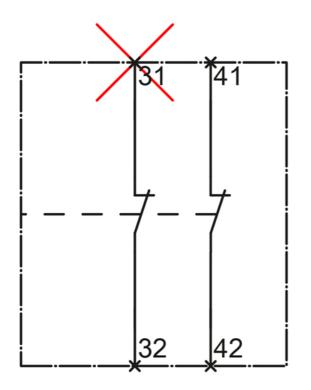

last change:

Aug 22, 2011