

Number of poles

3

FUSE-SWITCH-DISCONNECTOR 3-POLE, NH2, 400A MOUNTING PLATE CONSTRUCTION COVER LEVEL 70 MM FLAT CONNECTOR



Similar to image

General technical details:		
product brand name		SETRON
Product designation		Fuse switch disconnecter
Fuse system		LV HRC fuse
Installation size of fuse-link		NH1. NH2
Installation size of disconnecting link		2 and 1
Type from device		Auf- und Einbau
Design of the product		3-pole
Design of the operating mechanism		handle unit
Type of the driving mechanism / motor drive		No
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		0
Design of the load switch / Strip form		No
Product equipment / interlock		Yes
Product feature / sealable		Yes
Product component		No
• phase failure monitoring		

• undervoltage release mechanism		No
• undervoltage release with leading contact		No
• trip indicator		No
<b>Acceptability for application</b>		
• switch disconnecter		Yes
• emergency stop switch		No
• main switch		No
• safety cut-out switch		Yes
• maintenance/repair switch		Yes
<b>Product function</b>		
• fuse monitoring		No
• overvoltage protection monitoring		No
<b>Product extension</b>		
• auxiliary switch		Yes
• optional		
• fuse monitoring		Yes
• phase failure monitoring		Yes
• voltage trigger		No
• overvoltage protection monitoring		Yes
• locking capability		Yes
• motor drive		No
<b>Continuous current</b>		
• rated value	A	400
• at 35 °C / rated value	A	400
• at 40 °C / rated value	A	400
• at 45 °C / rated value	A	392
• at 50 °C / rated value	A	372
• at 55 °C / rated value	A	356
<b>Operating current</b>		
• at AC-21 B		
• at 400 V / rated value	A	400
• at 500 V / rated value	A	400
• at 690 V / rated value	A	400
• at AC-22 B		
• at 400 V / rated value	A	400
• at 500 V / rated value	A	400
• at 690 V / rated value	A	400
• at AC-23 B		
• at 400 V / rated value	A	400
• at 500 V / rated value	A	315

<ul style="list-style-type: none"> <li>• at 690 V / rated value</li> </ul>	A	125
<ul style="list-style-type: none"> <li>• at DC-21 B</li> </ul>		
<ul style="list-style-type: none"> <li>• at 240 V / rated value / maximum</li> </ul>	A	400
<ul style="list-style-type: none"> <li>• at 440 V / rated value / maximum</li> </ul>	A	400
<ul style="list-style-type: none"> <li>• at DC-22 B</li> </ul>		
<ul style="list-style-type: none"> <li>• at 240 V / rated value / maximum</li> </ul>	A	400
<ul style="list-style-type: none"> <li>• at 440 V / rated value / maximum</li> </ul>	A	315
<ul style="list-style-type: none"> <li>• at DC-23 B</li> </ul>		
<ul style="list-style-type: none"> <li>• at 240 V / rated value / maximum</li> </ul>	A	250
<ul style="list-style-type: none"> <li>• at 440 V / rated value / maximum</li> </ul>	A	160
<ul style="list-style-type: none"> <li>• with capacitive load</li> </ul>		
<ul style="list-style-type: none"> <li>• at 400 V / maximum</li> </ul>	A	72
<ul style="list-style-type: none"> <li>• at 500 V / maximum</li> </ul>	A	55
<b>Let-through current</b>		
<ul style="list-style-type: none"> <li>• with speedy activation / maximum permissible</li> </ul>	kA	40
<ul style="list-style-type: none"> <li>• with closed switch / maximum permissible</li> </ul>	kA	40
<b>Conditional short-circuit current (I<sub>q</sub>)</b>		
<ul style="list-style-type: none"> <li>• rated value</li> </ul>	kA	80
<ul style="list-style-type: none"> <li>• at 500 V / with AC / with speedy activation / rated value</li> </ul>	kA	80
<ul style="list-style-type: none"> <li>• at 690 V / with AC / with speedy activation / rated value</li> </ul>	kA	50
<ul style="list-style-type: none"> <li>• with closed switch</li> </ul>		
<ul style="list-style-type: none"> <li>• at 500 V / with AC / rated value</li> </ul>	kA	100
<ul style="list-style-type: none"> <li>• at 690 V / with AC / rated value</li> </ul>	kA	100
<b>Operating voltage / for DC / rated value</b>	V	440
<b>Tension d'emploi</b>		
<ul style="list-style-type: none"> <li>• for AC / rated value</li> </ul>	/ V	690
<ul style="list-style-type: none"> <li>• for DC / rated value</li> </ul>		
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	V	440
<b>Power factor</b>		
<ul style="list-style-type: none"> <li>• at AC-21 B</li> </ul>		0.95
<ul style="list-style-type: none"> <li>• at AC-22 B</li> </ul>		0.65
<ul style="list-style-type: none"> <li>• at AC-23 B</li> </ul>		0.35
<ul style="list-style-type: none"> <li>• with capacitive load</li> </ul>		-0.25
<b>Active power loss / maximum</b>	W	34
<b>Insulation voltage / rated value</b>	V	690
<b>Impulse voltage resistance / rated value</b>	kV	8
<b>I<sub>2t</sub> value / with closed switch / maximum permissible</b>	kA <sup>2</sup> ·s	2,150
<b>Item designation</b>		
<ul style="list-style-type: none"> <li>• according to DIN EN 61346-2</li> </ul>		Q
<ul style="list-style-type: none"> <li>• according to DIN EN 81346-2</li> </ul>		Q

**Connection elements and terminals:**

<b>Design of the electrical connection / for main current circuit</b>		flat connector
<b>Conductor cross section that can be connected / for main contacts</b>		
• single- or multi-stranded	mm <sup>2</sup>	25 ... 240
• stranded	mm <sup>2</sup>	25 ... 240
<b>Tightening torque</b>		
• with screw-type terminals	N·m	10 ... 12
<b>Arrangement of electrical connectors / for main current circuit</b>		sonstige

**Degree of protection and safety class:**

<b>IP degree of protection</b>		
• open		IP20
• on the front		IP40
• with closed switch		
• without cover or cable lug cover		IP30
• with cover or cable lug cover		IP40
<b>Degree of pollution</b>		3
<b>Mechanical operating cycles as operating time / typical</b>		1,000

**Ambient conditions:**

<b>Ambient temperature</b>		
• during operating	°C	-25 ... +55
• during storage	°C	-50 ... +80

**Installation/mounting/dimensions:**

<b>Mounting type</b>		floor mounting
• rail mounting		No
• front mounting		No
• front mounting with central attachment		No
• front mounting with 4-hole attachment		No
• floor mounting		Yes
<b>mounting position</b>		waagrecht oder senkrecht
<b>Width</b>	mm	209.4
<b>Height</b>	mm	306
<b>Depth</b>	mm	129.9
<b>Net weight</b>	kg	4.21

**Certificates/approvals:**

## General Product Approval



CCC

GOST

UL

UR

EG-Konf.

## Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



## Shipping Approval



GL



LRS

## Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NP1153-1DA10>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3NP1153-1DA10/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NP1153-1DA10](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NP1153-1DA10)


**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

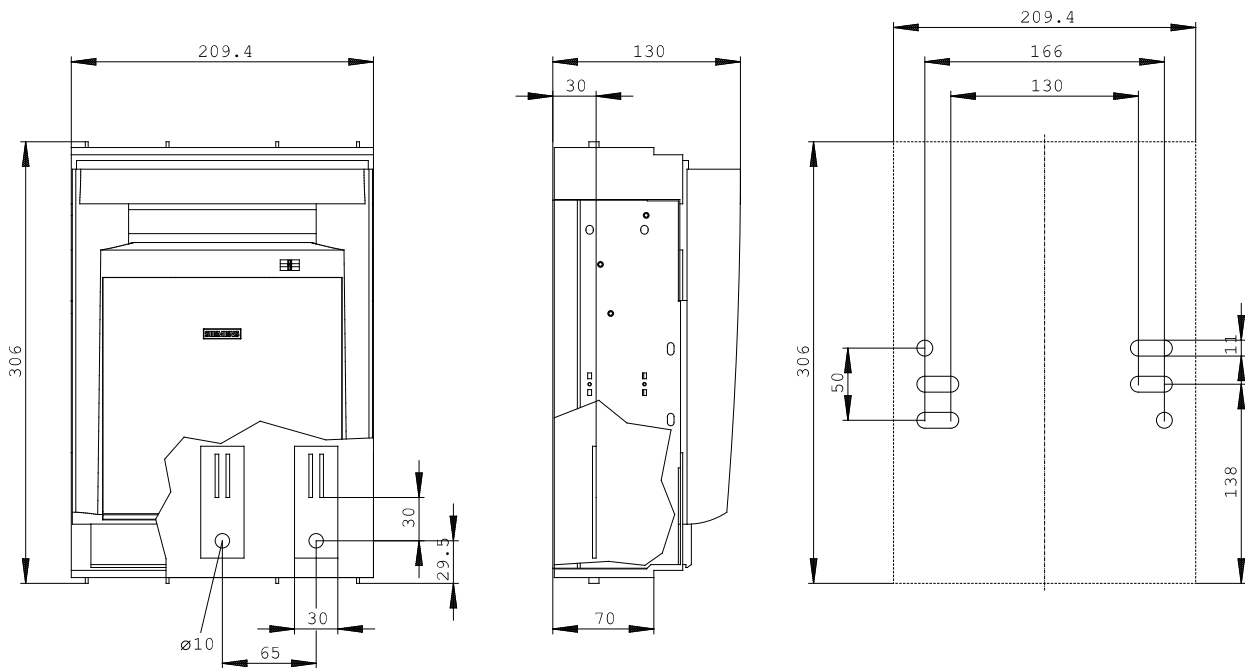

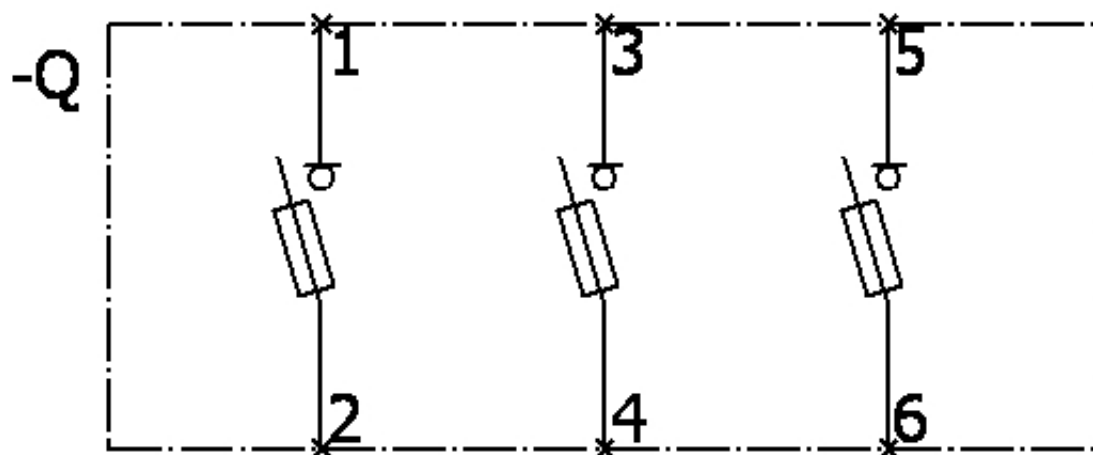

last change:

Mar 31, 2014