



CONTROL SWITCH WITH 2 MAKE CONTACTS FOR AC 230V/400V FOR 5TT58 AND 5TT50

Similar to image

Technical data:		
Number of NC contacts		0
Product extension		Auxiliary current switch
Number of change-over switches		0
Number of NO contacts		2
Number of width units		0.5
Breaking capacity current / nominal value	A	6
Operating voltage / rated value	V	230
Design of product / factory mounted		No
Product extension / can be mounted		contactors / relays
Number of fault signal contacts		0
Voltage type / of control voltage		AC

Certificates/approvals:		
General Product Approval	Declaration of Conformity	other



[Environmental Confirmations](#)

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT5910-0/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT5910-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT5910-0)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

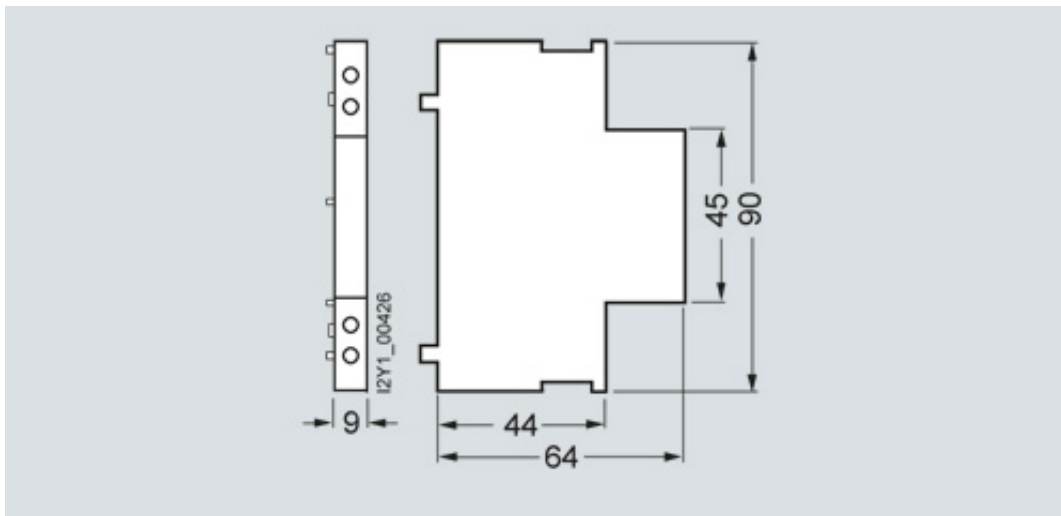

last change:

Mar 24, 2014