

STAND-ALONE INSTALLATION SUPPORT FOR  
3RU21/3RB30/3RB31 SZ S0,  
STAND-ALONE INSTALLATION MAIN CIRCUIT: SPRING  
TERMINAL AUX. CIRCUIT: --

### General technical data:

<b>Product brand name</b>		SIRIUS
<b>product designation</b>		individual mount
<b>Size of overload relay</b>		S0
<b>Ambient temperature</b>		
• during storage	°C	-55 ... 80
• during operating	°C	-20 ... 70

### Installation/mounting/dimensions:

<b>Type of mounting</b>		screw and snap-on mounting onto 35 mm standard mounting rail
<b>Width</b>	mm	45
<b>Height</b>	mm	114
<b>Depth</b>	mm	76

### Connections:

<b>Design of the electrical connection</b>		
• for main current circuit		spring-loaded terminals
<b>Type of the connectable conductor cross-section</b>		
• for main contacts		
• solid		1 ... 10 mm²

- stranded
- finely stranded
  - with conductor end processing
  - without conductor final cutting
- for AWG conductors
- for main contacts

1 ... 10 mm<sup>2</sup>

1 ... 6 mm<sup>2</sup>

1x (1 ... 6 mm<sup>2</sup>)

1x (16 ... 8)

#### General Product Approval



CQC



CSA

[ROSTEST](#)



UL

#### Test Certificates

[Manufacturer](#)

[other](#)

#### Shipping Approval



ABS



DNV



GL



LRS

#### other

[Manufacturer](#)

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### CAX-Online-Generator




<http://www.siemens.com/cax>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RU2926-3AC01/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RU2926-3AC01](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RU2926-3AC01)

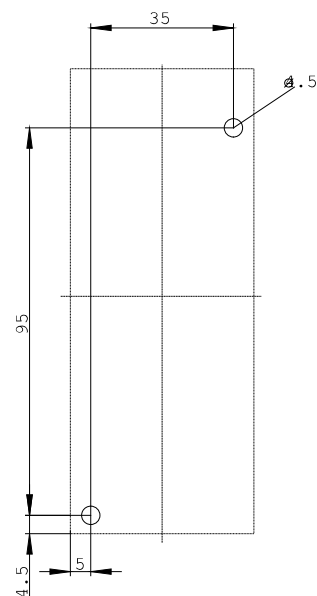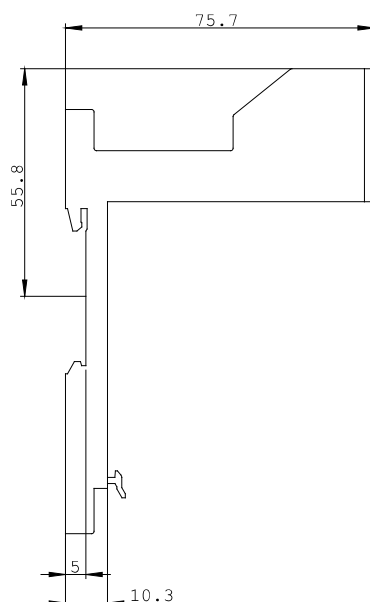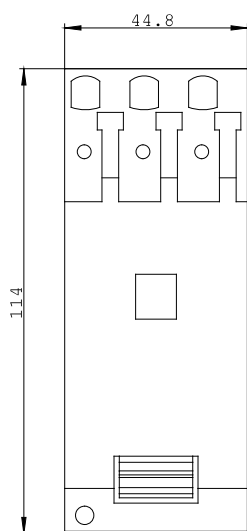

last change:

Oct 24, 2011