



OVERLOAD RELAY 0.32...1.25 A FOR MOTOR  
PROTECTION SIZE S00,  
CLASS 10 CONTACTOR ASS. MAIN CIRCUIT: SCREW  
CONN. AUX.CIRCUIT: SCREW CONN. MANUAL-AUTOM.-  
RESET

### General technical data:

<b>Product brand name</b>		SIRIUS
<b>product designation</b>		solid-state overload relay
<b>Protection class IP / on the front</b>		IP20
<b>Insulation voltage / with degree of pollution 3 / rated value</b>	V	690
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Ambient temperature</b>		
• during storage	°C	-40 ... 80
• during transport	°C	-40 ... 80
• during operating	°C	-25 ... 60
<b>Relative humidity</b>		
• during operating phase	/ %	95
<b>EMC immunity to interference</b>		
• according to IEC 60947-1		corresponds to degree of severity 3
<b>EMC emitted interference</b>		
• according to IEC 60947-1		CISPR 11, environment B (residential area)
<b>Conductor-bound parasitic coupling BURST</b>		
• according to IEC 61000-4-4		2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
<b>Conductor-bound parasitic coupling conductor-earth SURGE</b>		

• according to IEC 61000-4-5		2 kV (line to earth) corresponds to degree of severity 3
<b>Conductor-bound parasitic coupling conductor-conductor SURGE</b>		
• according to IEC 61000-4-5		1 kV (line to line) corresponds to degree of severity 3
<b>Electrostatic discharge</b>		
• according to IEC 61000-4-2		6 kV contact discharge / 8 kV air discharge
<b>Field-bound parasitic coupling</b>		
• according to IEC 61000-4-3		10 V/m
<b>Resistance against shock</b>		15g / 11 ms
<b>Impulse voltage resistance / rated value</b>	kV	6
<b>Item designation</b>		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		F
• according to DIN EN 61346-2		F
<b>Size of overload relay</b>		S00
<b>Size of the contactor / can be combined / company-specific</b>		S00
<b>type of protection</b>		PTB 09 ATEX 3001 Ex II (2) GD
<b>Type of assignment</b>		2
<b>Trip class</b>		CLASS 10

#### Main circuit:

<b>Number of poles / for main current circuit</b>		3
<b>Operating voltage / at AC-3 / rated value</b>		
• maximum	V	690
<b>Operating current / at AC-3 / at 400 V</b>		
• rated value	A	1.25
<b>Adjustable response current</b>		
• of the current-dependent overload release	A	0.32 ... 1.25
<b>Service power / for three-phase servomotors / at 400 V / at 50 Hz</b>		
• for AC three-phase	kW	0.12 ... 0.37
<b>Operating current / of the fuse link</b>		
• rated value	A	6

#### Auxiliary circuit:

<b>Contact reliability / of the auxiliary contacts</b>		acceptability for PLC control (17 V, 5 mA)
<b>Number of NC contacts / for auxiliary contacts</b>		1
<b>Number of NO contacts / for auxiliary contacts</b>		1
<b>Number of change-over switches / for auxiliary contacts</b>		0
<b>Operating current / of the auxiliary contacts</b>		
• at AC-15		
• at 24 V	A	4

- at 110 V
- at 120 V
- at 125 V
- at 230 V
- at DC-13
  - at 24 V
  - at 60 V
  - at 110 V
  - at 125 V
  - at 220 V

A	4
A	4
A	4
A	3
A	2
A	1
A	0.3
A	0.3
A	1

#### Short-circuit:

**Design of the fuse link / for short-circuit protection of the auxiliary switch / required**

fuse gL/gG: 6 A

#### Installation/mounting/dimensions:

**Built in orientation**

any

**Type of mounting**

direct mounting

**Width**

mm

45

**Height**

mm

64.7

**Depth**

mm

72.5

**Distance, to be maintained, to the ranks assembly**

- forwards
- backwards
- upwards
- downwards
- sideways

mm  
mm  
mm  
mm  
mm

0  
0  
0  
0  
0

**Distance, to be maintained, to earthed part**

- forwards
- backwards
- upwards
- downwards
- sideways

mm  
mm  
mm  
mm  
mm

0  
0  
0  
0  
6

**Distance, to be maintained, conductive elements**

- forwards
- backwards
- upwards
- downwards
- sideways

mm  
mm  
mm  
mm  
mm

0  
0  
0  
0  
6

#### Connections:

<b>Design of the electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> </ul>		screw-type terminals screw-type terminals
<b>Product function / removable terminal for auxiliary and control circuit</b>		Yes
<b>Type of the connectable conductor cross-section</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> <li>• finely stranded <ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul> </li> </ul> </li> <li>• for AWG conductors / for main contacts</li> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded <ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul> </li> </ul> </li> <li>• for AWG conductors / for auxiliary contacts</li> </ul>		1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 4 mm <sup>2</sup> ) 1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ), 1x (0.75 ... 4 mm <sup>2</sup> ), 2x (0.75 ... 4 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (20 ... 12), 2x (20 ... 12) 1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ) 1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ), 1x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (20 ... 14), 2x (20 ... 14)

#### Certificates/approvals:

##### Verification of suitability

- ATEX

UL / CSA

Yes

##### General Product Approval

**For use in hazardous locations**

**Test Certificates**



CQC



CSA

[ROSTEST](#)



UL



PTB

[Manufacturer](#)

##### Shipping Approval

**other**



ABS



GL



LRS



RMRS

[Manufacturer](#)

#### UL/CSA ratings:

**Contact rating designation / for auxiliary contacts / according to UL**

B600 / R300

#### Reliability figures:

**Protection against electrical shock**

finger-safe

#### Further information:

---

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

---

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

---

**Cax online generator:**

<http://www.siemens.com/cax>

---

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**



<http://support.automation.siemens.com/WW/view/en/3RB3016-1NB0/all>


---

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RB3016-1NB0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RB3016-1NB0)

---

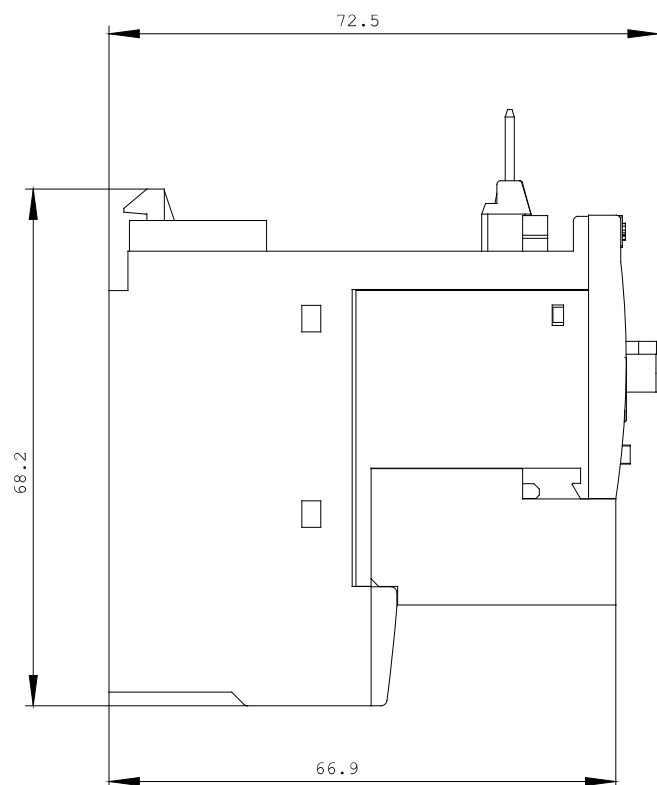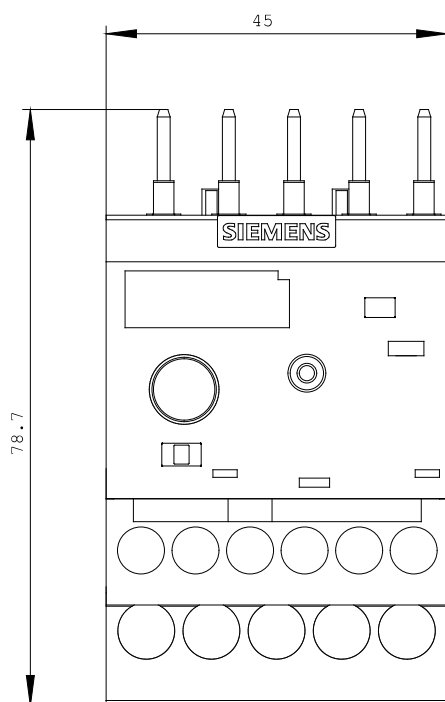

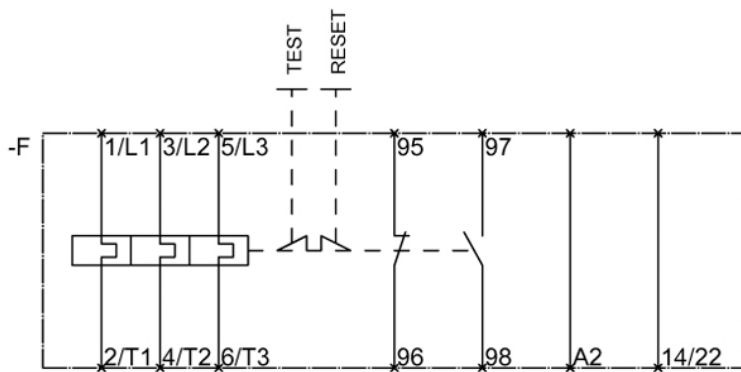

last change:

Oct 24, 2011