



LOAD FEEDER FUSELESS REVERSING DUTY,  
AC 400V, SZ S00, 0.28...0.4A,  
DC 24V SPRING-LOADED CONNECTION FOR RAIL-  
MOUNTING,  
TYPE OF COORDINATION 2,  
IQ = 150KA (ALSO FULFILLS TYPE OF COORDINATION 1)  
1NC (CONTACTOR)

### General technical data:

|  |    |                             |
|--|----|-----------------------------|
| Product brand name   |    | SIRIUS                      |
| product designation  |    | non-fused load feeders 3RA2 |
| Design of the product  |    | reversing starter           |
| Size of the load feeder  |    | S00                         |
| Protection class IP / on the front   |    | IP20                        |
| Degree of pollution  |    | 3                           |
| Insulation voltage / rated value   | V  | 690                         |
| Installation altitude / at a height over sea level / maximum               | m  | 2,000                       |
| Ambient temperature  |    |                             |
| • during transport   | °C | -55 ... 80                  |
| • during storage   | °C | -55 ... 80                  |
| • during operating   | °C | -20 ... 60                  |
| Impulse voltage resistance / rated value                                   | kV | 6                           |
| Active power loss / per conductor / typical                                | W  | 2                           |
| Item designation   |    |                             |
| • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 |    | Q                           |
| • according to DIN EN 61346-2  |    | Q                           |
| Type of assignment   |    | 2                           |

|   |   |   |
|---|---|---|
| <b>Mechanical operating cycles as operating time / of the contactor</b><br>• typical  |   | 10,000,000  |
| <b>Manufacturer article number</b><br>• of the circuit-breakers included in the scope of supply<br>• of the contactor included in the scope of supply<br>• of the link module included in the scope of supply |   | <a href="#">3RV2011-0EA20</a><br><a href="#">3RT2015-2BB42</a><br><a href="#">3RA2911-2AA00</a> |
| <b>Design of the switching contact</b>  |   | mechanical  |
| <b>Type of the motor protection</b>   |   | bimetal   |
| <b>Adjustable response current</b><br>• of the current-dependent overload release   | A | 0.28 ... 0.4  |

|   |  |                |
|---|--|----------------|
| <b>Communication:</b>   |  |                |
| <b>Product function / bus-communication</b>   |  | No             |
| <b>Protocol / will be supported</b><br>• AS interface protocol<br>• PROFIBUS DP protocol<br>• PROFINET protocol |  | No<br>No<br>No |
| <b>Product extension / function module for communication</b>  |  | No             |

|   |                           |                                  |
|---|---------------------------|----------------------------------|
| <b>Main circuit:</b>  |                           |                                  |
| <b>Number of poles / for main current circuit</b>   |                           | 3                                |
| <b>Number of NC contacts / for main contacts</b>  |                           | 0                                |
| <b>Number of NO contacts / for main contacts</b>  |                           | 3                                |
| <b>Operating voltage / at AC-3 / rated value / maximum</b>  | V                         | 690                              |
| <b>Operating current</b><br>• at AC-1 / at 400 V / rated value<br>• at AC-2 / at 400 V / rated value<br>• at AC-3 / at 400 V / rated value<br>• at AC-4 / at 400 V / rated value                  | A<br>A<br>A<br>A          | 0.4<br>0.3<br>0.3<br>0.3         |
| <b>Service power</b><br>• at AC-2 / at 400 V / rated value<br>• at AC-3<br>• at 400 V / rated value<br>• at 500 V / rated value<br>• at 690 V / rated value<br>• at AC-4 / at 400 V / rated value | W<br><br>W<br>W<br>W<br>W | 90<br><br>90<br>120<br>120<br>90 |
| <b>Off-load operating frequency</b>   | 1/h                       | 10,000                           |
| <b>Frequency of operation</b><br>• at AC-1 / according to IEC 60947-6-2 / maximum<br>• at AC-2 / according to IEC 60947-6-2 / maximum   | 1/h<br>1/h                | 1,000<br>750                     |

- at AC-3 / according to IEC 60947-6-2 / maximum
- at AC-4 / according to IEC 60947-6-2 / maximum

|     |     |
|-----|-----|
| 1/h | 750 |
| 1/h | 250 |

#### Control circuit:

|  |    |    |
|--|----|----|
| Type of voltage / of the controlled supply voltage |    | DC |
| Control supply voltage frequency                   |    |    |
| • 1 / rated value                                  | Hz | 0  |
| Control supply voltage / 1                         |    |    |
| • for DC / rated value                             | V  | 24 |
| Holding power / of the solenoid / for DC           | W  | 4  |

#### Auxiliary circuit:

|   |  |     |
|---|--|-----|
| Product extension / auxiliary switch                    |  | Yes |
| Number of NC contacts / for auxiliary contacts          |  | 1   |
| Number of NO contacts / for auxiliary contacts          |  | 0   |
| Number of change-over switches / for auxiliary contacts |  | 0   |

#### Inputs/ Outputs:

|                          |  |   |
|--------------------------|--|---|
| Number of digital inputs |  | 0 |
|--------------------------|--|---|

#### Short-circuit:

|   |   |                  |
|---|---|------------------|
| Product function / short circuit protection         |   | Yes              |
| Design of the short-circuit protection              |   | circuit-breakers |
| Breaking capacity limit short-circuit current (Icu) |   |                  |
| • at 400 V / rated value                            | A | 100,000          |
| • at 500 V / rated value                            | A | 100,000          |
| • at 690 V / rated value                            | A | 100,000          |

#### Installation/mounting/dimensions:

|   |    |  |
|---|----|--|
| Built in orientation                              |    | vertical   |
| Type of mounting                                  |    | screw and snap-on mounting onto 35 mm standard mounting rail |
| Width   | mm | 90   |
| Height  | mm | 204  |
| Depth   | mm | 97.1   |
| Distance, to be maintained, to the ranks assembly |    |  |
| • forwards  | mm | 0  |
| • backwards                                       | mm | 0  |
| • upwards   | mm | 20   |
| • downwards                                       | mm | 30   |
| • sideways  | mm | 0  |
| Distance, to be maintained, to earthed part       |    |  |

|  |    |    |
|--|----|----|
| • forwards   | mm | 0  |
| • backwards  | mm | 0  |
| • upwards  | mm | 20 |
| • downwards  | mm | 10 |
| • sideways   | mm | 9  |
| <b>Distance, to be maintained, conductive elements</b> |    |    |
| • forwards   | mm | 0  |
| • backwards  | mm | 0  |
| • upwards  | mm | 20 |
| • downwards  | mm | 10 |
| • sideways   | mm | 9  |

#### Connections:

##### Design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

spring-loaded terminals  
spring-loaded terminals

##### Type of the connectable conductor cross-section

- for main contacts
  - solid
  - stranded
  - finely stranded
    - with conductor end processing
    - without conductor final cutting
- for AWG conductors / for main contacts
- for auxiliary contacts
  - solid
  - finely stranded
    - with conductor end processing
    - without conductor final cutting
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 4 mm<sup>2</sup>)  
2x (0.5 ... 4 mm<sup>2</sup>)  
  
2x (0.5 ... 2.5 mm<sup>2</sup>)  
2x (0.5 ... 2.5 mm<sup>2</sup>)  
2x (20 ... 12)  
  
2x (0.5 ... 4 mm<sup>2</sup>)  
  
2x (0.5 ... 2.5 mm<sup>2</sup>)  
2x (0.5 ... 2.5 mm<sup>2</sup>)  
2x (20 ... 12)

#### Certificates/approvals:

##### Verification of suitability

CE / UL / CSA / CCC

##### Verification of suitability / ATEX

No

|                                 |                                       |                          |
|---------------------------------|---------------------------------------|--------------------------|
| <b>General Product Approval</b> | <b>For use in hazardous locations</b> | <b>Test Certificates</b> |
|---------------------------------|---------------------------------------|--------------------------|

[ROSTEST](#)



[DEKRA EXAM, DMT](#)

[Manufacturer](#)

#### Shipping Approval

**other**



ABS



PRS



RINA

[Manufacturer](#)

[other](#)

#### UL/CSA ratings

##### Operating current (FLA) / for three-phase squirrel cage motors

- at 480 V / rated value
- at 600 V / rated value

A

0.4

A

0.4

##### Contact rating designation / for auxiliary contacts / according to UL

A600 / Q600

#### Safety:

##### B10 value / with high demand rate

- according to SN 31920

1,000,000

##### Failure rate (FIT value) / with low demand rate

- according to SN 31920

FIT

250

##### Proportion of dangerous failures

- with low demand rate / according to SN 31920
- with high demand rate / according to SN 31920

%

40

%

75

##### T1 value / for proof test interval or service life

- according to IEC 61508

a

10

##### Protection against electrical shock

finger-safe

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### CAX-Online-Generator



<http://www.siemens.com/cax>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA2210-0EE15-2BB4/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RA2210-0EE15-2BB4](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA2210-0EE15-2BB4)

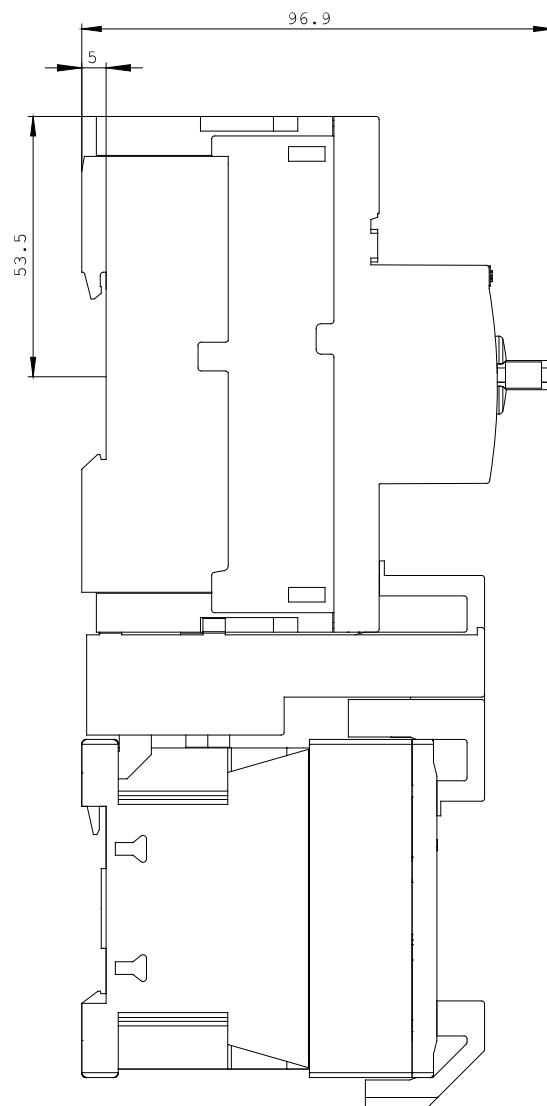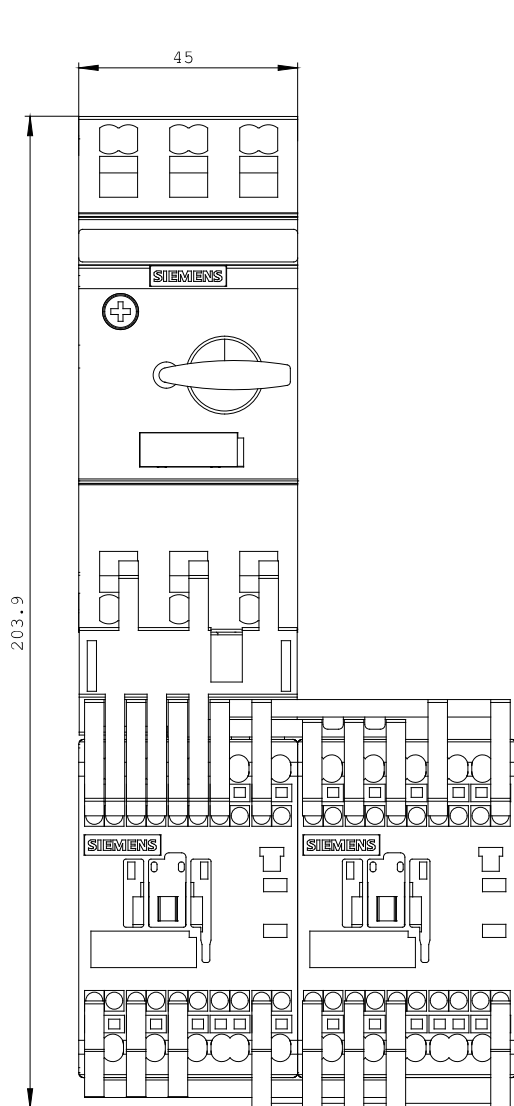



last change:

Oct 24, 2011