

Additional mounting BU for ET 200SP motor starter containing 5 units

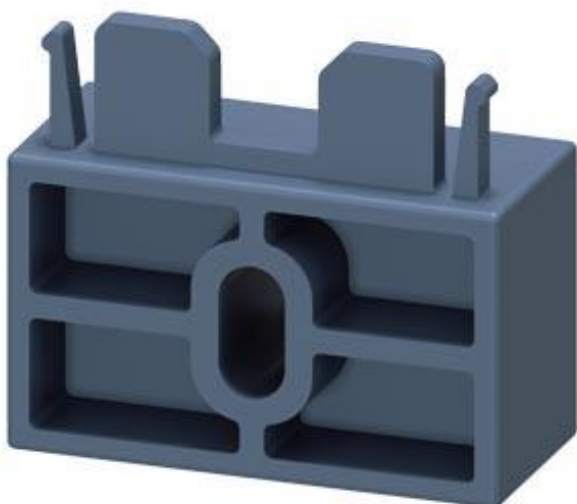


Figure similar

Product designation	Mechanical bracket for BaseUnit
Design of the product	For motor starter BaseUnit 30 mm
General technical data:	
Product function	Zubehör
Degree of pollution	2
Protection class IP	IP20
Shock resistance	6g / 11 ms
Vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
Installation/ mounting/ dimensions:	
Mounting position	vertical, horizontal, flat
Mounting type	pluggable on BaseUnit
Height	26 mm
Width	30 mm
Depth	14 mm
Ambient conditions:	
Ambient temperature	
• during operation	-25 ... +60 °C

- during storage
- during transport

-40 ... +70 °C

-40 ... +70 °C

Certificates/approvals

General Product Approval	Declaration of Conformity	Test Certificates	other
 CSA	 UL	 EG-Konf.	Typprüfbescheinigung/Werkszeugnis Bestätigungen

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK19081EA001BP0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK19081EA001BP0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK19081EA001BP0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK19081EA001BP0&lang=en

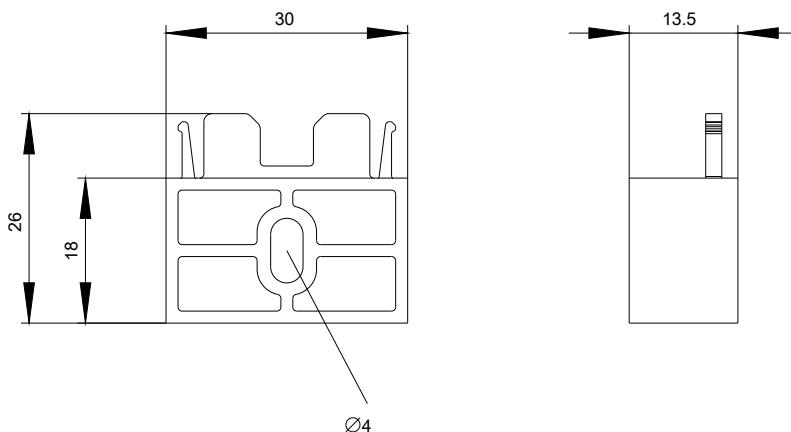

last modified:

27.06.2016