

Touch protection for power bus for ET 200SP motor starter
containing 10 units



Figure similar

Product designation	Infeed bus cover
Design of the product	For motor starter BaseUnit 30 mm

General technical data:

Product function	Zubehör
Degree of pollution	2
Protection class IP	IP20
Shock resistance	6g / 11 ms
Vibration resistance	15 mm to 6 Hz; 2g to 500 Hz

Installation/ mounting/ dimensions:

Mounting position	vertical, horizontal, flat
Mounting type	pluggable on BaseUnit
Height	47 mm
Width	8 mm
Depth	21 mm

Ambient conditions:

Ambient temperature	
• during operation	-25 ... +60 °C

- during storage
- during transport

-40 ... +70 °C

-40 ... +70 °C

Certificates/approvals

General Product Approval	Declaration of Conformity	Test Certificates	other
 CSA	 UL	 EG-Konf.	Typprüfbescheinigung/Werkszeugnis Bestätigungen

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK19081DA002BP0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK19081DA002BP0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK19081DA002BP0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK19081DA002BP0&lang=en

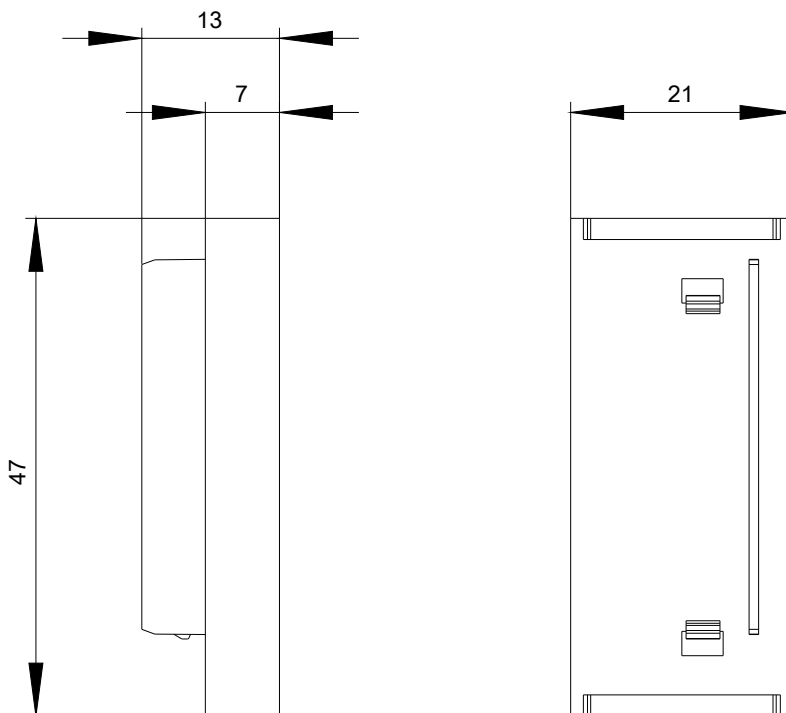

last modified:

27.06.2016