



DIGITAL MONITORING RELAY FOR FAULT
CURRENT MONITORING (W. DIFFERENTIAL CT
3UL23) FOR IO-LINK SETTING RANGE 0.03A TO 40A
SEPARATE FOR ALARM THRESHOLD AND SWITCH-
OFF VALUE STARTUP AND TRIPPING DELAY 0 TO
999.9S SWITCH-OFF HYSTERESIS UP TO 50%
ALARM HYSTERESIS 5% FIXED WIDTH 22.5 MM, 2
CO CONTACTS W. OR W/O ERROR LOG SPRING-
LOADED TERMINAL

Figure similar

Product function		for three-phase supplies
Measuring circuit:		
Type of current for monitoring		AC
Measurable current	mA	10 ... 43 000
Measurable line frequency	Hz	16 ... 400
Adjustable pick-up value current		
• 1	mA	30 ... 40 A
• 2	mA	30 ... 40 A
Adjustable response delay time when starting	s	0 ... 999.9
Buffering time in the event of power failure minimum	ms	10
Operating voltage rated value	V	24 ... 24
Relative metering precision	%	5
Accuracy of digital display		+/-1 digit
Temperature drift per °C	%/°C	0.1
Relative repeat accuracy	%	1
General technical data:		
Design of the display		LCD

Product function		
• difference current indication		Yes
• Fault storage		Yes
• Overcurrent detection 1 phase		Yes
• undercurrent detection 1 phase		No
• External reset		Yes
• Adjustable open/closed-circuit current principle		Yes
Starting time after the control supply voltage has been applied	ms	1 600
Response time maximum	ms	150
Type of voltage of the control supply voltage		DC
Control supply voltage		
• at DC rated value	V	24 ... 24
Operating range factor control supply voltage rated value		
• at DC		0.85 ... 1.1
Surge voltage resistance rated value	kV	4
Consumed active power	W	2
Protection class IP		IP20
Electromagnetic compatibility		IEC 60947-1 / IEC 61000-6-2 / IEC 61000-6-4
Vibration resistance acc. to IEC 60068-2-6		1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
Shock resistance acc. to IEC 60068-2-27		sinusoidal half-wave 15g / 11 ms
Installation altitude at height above sea level maximum	m	2 000
Conducted interference due to burst acc. to IEC 61000-4-4		2 kV
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5		2 kV
Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5		1 kV
Electrostatic discharge acc. to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling acc. to IEC 61000-4-3		10 V/m
Insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	V	300
Degree of pollution		3
Ambient temperature		
• during operation	°C	-25 ... +60
• during storage	°C	-40 ... +85
• during transport	°C	-40 ... +85
Design of the electrical isolation		galvanic
Galvanic isolation		
• between entrance and outlet		Yes
• between the outputs		Yes

- between the voltage supply and other circuits

No

Communication/ Protocol:

Type of voltage supply via input/output link master		Yes
IO-Link transfer rate		COM2 (38,4 kBaud)
Protocol is supported IO-Link protocol		Yes
Amount of data		
• of the address area of the outputs with cyclical transfer total	byte	2
• of the address area of the inputs with cyclical transfer total	byte	4
Point-to-point cycle time between master and IO-Link device minimum	ms	10

Mechanical data:

Width	mm	22.5
Height	mm	103
Depth	mm	91
Mounting position		any
Required spacing for grounded parts		
• forwards	mm	0
• Backwards	mm	0
• at the side	mm	0
• upwards	mm	0
• downwards	mm	0
Required spacing with side-by-side mounting		
• forwards	mm	0
• Backwards	mm	0
• at the side	mm	0
• upwards	mm	0
• downwards	mm	0
Required spacing for live parts		
• forwards	mm	0
• Backwards	mm	0
• at the side	mm	0
• upwards	mm	0
• downwards	mm	0
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Product function removable terminal for auxiliary and control circuit		Yes
Type of electrical connection		spring-loaded terminals
Type of connectable conductor cross-sections		
• solid		2x (0.25 ... 1.5 mm²)

- finely stranded
 - with core end processing
 - without core end processing
- at AWG conductors
 - solid
 - stranded

2 x (0.25 ... 1.5 mm²)
 2x (0.25 ... 1.5 mm²)

 2x (24 ... 16)
 2x (24 ... 16)

Outputs:

Number of NO contacts delayed switching		0
Number of NC contacts delayed switching		0
Number of CO contacts delayed switching		2
Ampacity of the output relay		
• at AC-15 — at 250 V at 50/60 Hz — at 400 V at 50/60 Hz • at DC-13 — at 24 V — at 125 V — at 250 V	A A A A A	3 0 1 0.2 0.1
Operating current at 17 V minimum	mA	5
Continuous current of the DIAZED fuse link of the output relay	A	4
Thermal current of the switching element with contacts maximum	A	5
Mechanical service life (switching cycles) typical		10 000 000
Electrical endurance (switching cycles) at AC-15 at 230 V typical		100 000
Operating frequency with 3RT2 contactor maximum	1/h	5 000

Certificates/ approvals:

General Product Approval

Declaration of Conformity

Test Certificates



CCC

[Herstellererklärung](#)



UL



EG-Konf.

[Typprüfbescheinigung/Werkszeugnis](#)

Test Certificates

other

Railway

[spezielle
Prüfbescheinigunge
n](#)

[Bestätigungen](#)

[Schwingen/Schocke
n](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4825-2CA40>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4825-2CA40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4825-2CA40&lang=en

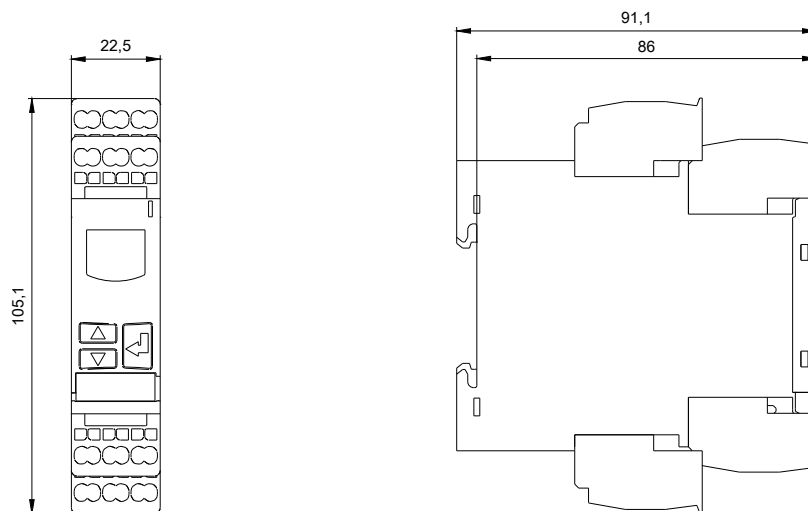

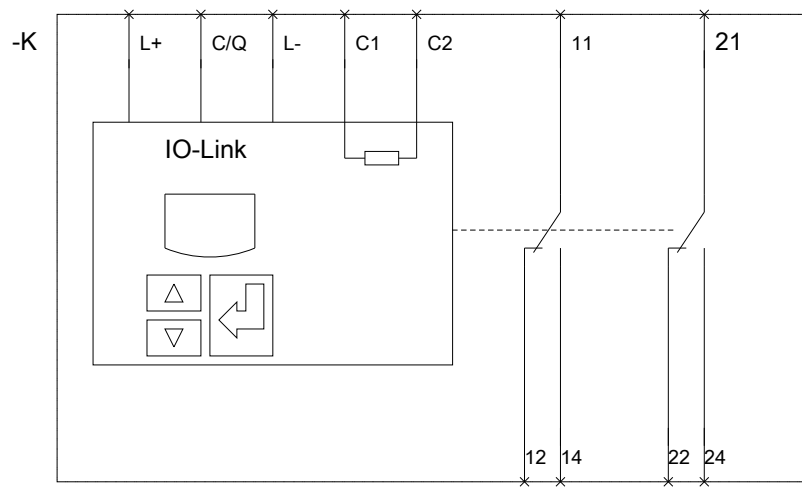

last modified:

02/06/2017