


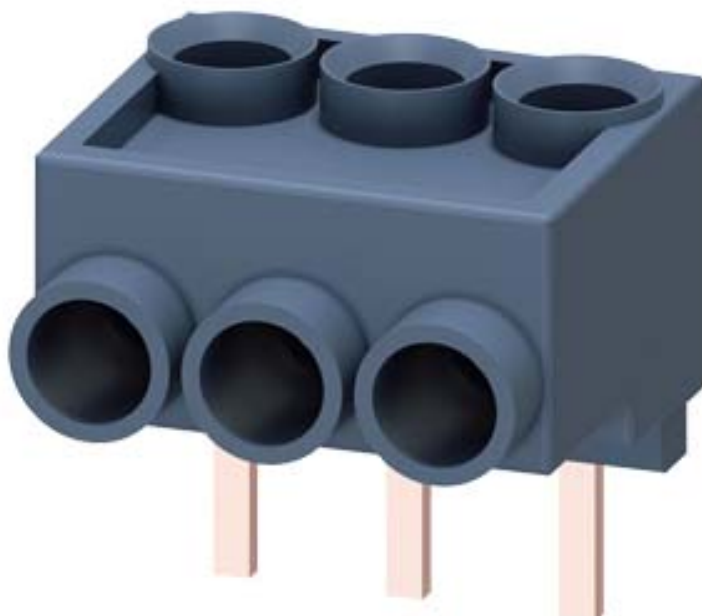

General technical data:

Product brand name		SIRIUS
Product designation		3-phase infeed terminals
Size of contactor		S00
Protection class IP on the front		IP20
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-40 ... +60
Insulation voltage with degree of pollution 3 rated value	V	690

Installation/ mounting/ dimensions:

Width	mm	25.9
Height	mm	30.4
Depth	mm	28.4

Connections/ Terminals:

Type of electrical connection		
• for main current circuit		screw-type terminals with box terminals
Type of connectable conductor cross-sections		

- for main contacts

- solid
- stranded
- finely stranded
 - with core end processing

- at AWG conductors

- for main contacts

1x (2.5 ... 6.0 mm²)

1x (2.5 ... 6.0 mm²)

1x (2.5 ... 10.0 mm²)

1x (12 ... 8)

Certificates/ approvals:

Certificate of suitability

CE / UL / CSA / CCC

General Product Approval

Declaration of Conformity

Test Certificates



CSA



UL



EG-Konf.

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Shipping Approval



ABS



BUREAU VERITAS



GL



LRS



PRS



RINA

Shipping Approval

other

Railway



RMRS

[Confirmation](#)

[Vibration and Shock](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2913-3K>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2913-3K>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2913-3K&lang=en

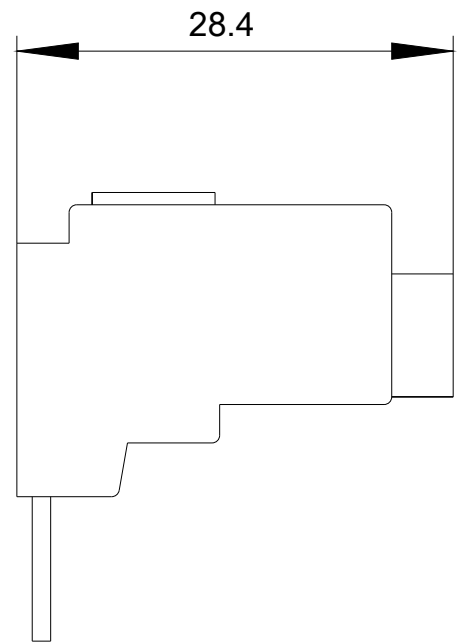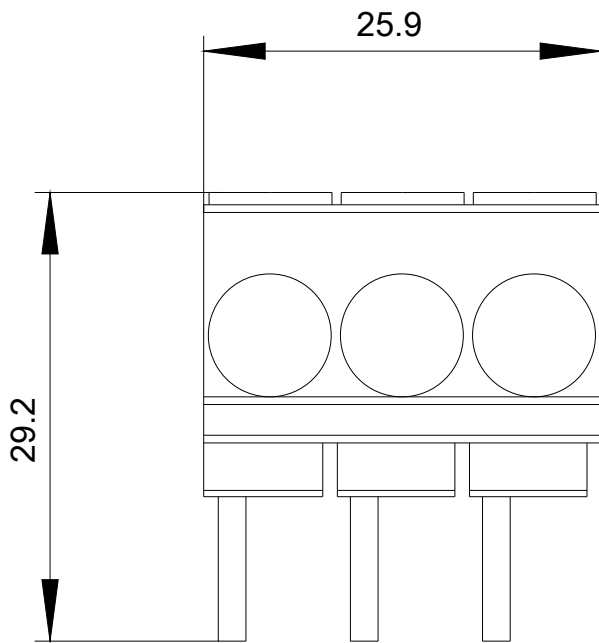

last modified:

10/31/2018