



INSTA CONTACTOR WITH 3 NO CONT. AND 1 NC CONT.
CONTACT FOR AC 230,
400V 25A ACTIVATION ACDC24V

Similar to image

Technical data:		
Mounting depth	mm	64
Height	mm	90
Width	mm	35
Depth	mm	71
Number of NC contacts		1
Number of NO contacts		3
Number of pitch units for width		2
Type of voltage <ul style="list-style-type: none">• for operating• of the operating voltage		AC/DC AC
Control supply voltage / rated value	V	24
Operating current / rated value	A	24
Operating voltage / rated value <ul style="list-style-type: none">• minimum• maximum	V V	400 400
Protection class IP		IP20
Product extension / can be installed / supplementary device		Yes
Product component / slide for manual operation		No

Control supply voltage / rated value / maximum	V	24
Item designation		
• according to DIN EN 61346-2		Q
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		Q

Certificates/approvals:

General Product Approval



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)




<http://support.automation.siemens.com/WW/view/en/5TT5031-2/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT5031-2

CAX-Online-Generator

<http://www.siemens.com/cax>

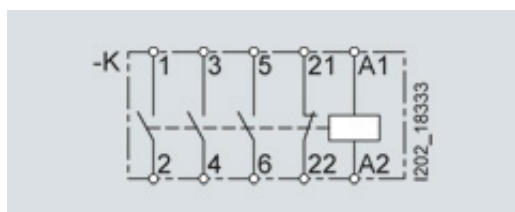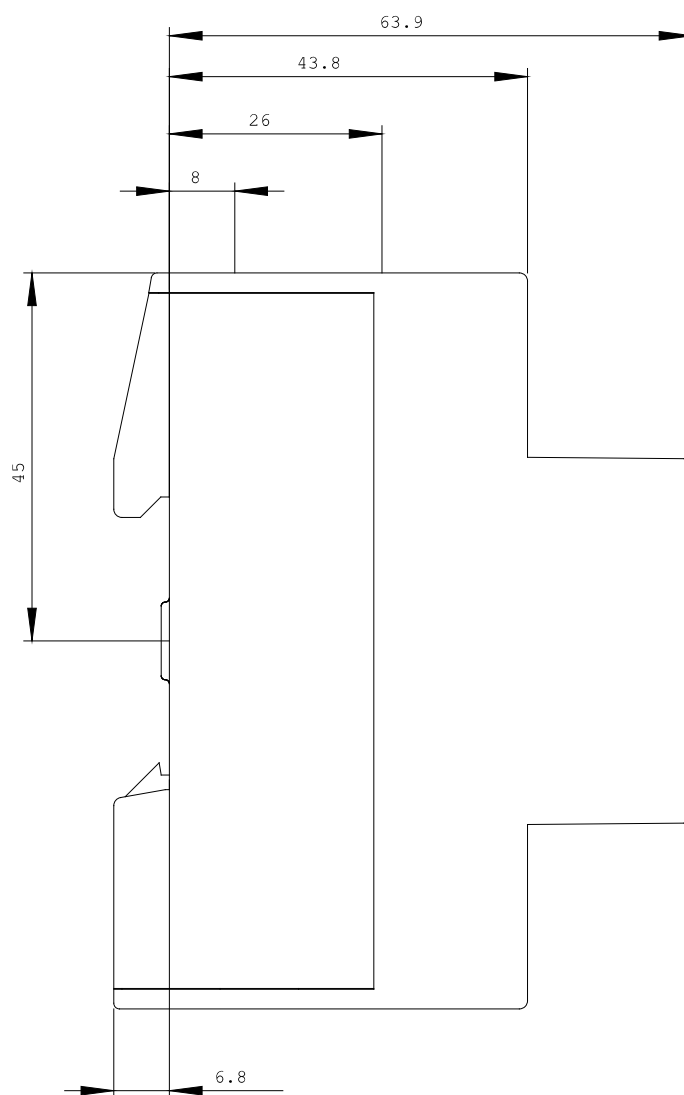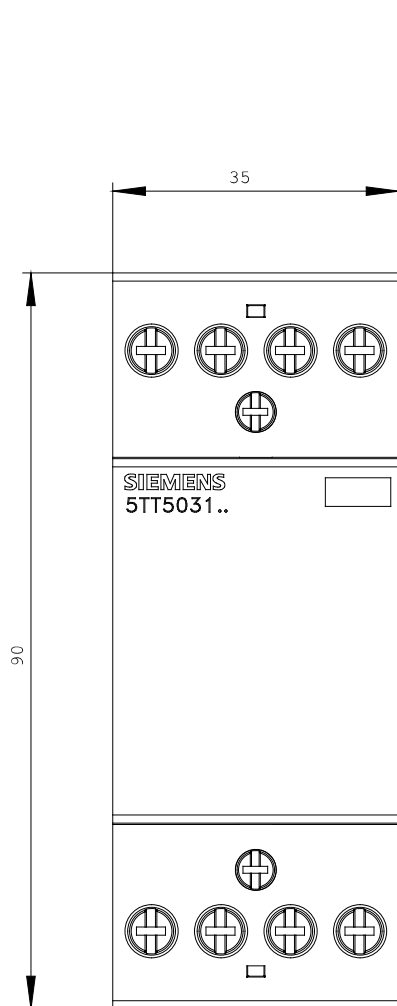

last change:

Aug 2, 2012