



INSTA CONTACTOR WITH 3 NO CONT. AND 1 NC CONT.
CONTACT FOR AC 230,
400V 63A ACTIVATION AC230V DC220V

Similar to image

| Technical data: | | |
|---|----|-------|
| Mounting depth | mm | 64 |
| Height | mm | 90 |
| Width | mm | 53.5 |
| Depth | mm | 71 |
| Number of NC contacts | | 1 |
| Number of NO contacts | | 3 |
| Number of pitch units for width | | 3 |
| Type of voltage | | |
| • for operating | | AC/DC |
| • of the operating voltage | | AC |
| Control supply voltage / rated value | V | 230 |
| Operating current / rated value | A | 63 |
| Operating voltage / rated value | | |
| • minimum | V | 400 |
| • maximum | V | 400 |
| Protection class IP | | IP20 |
| Product extension / can be installed / supplementary device | | Yes |
| Product component / slide for manual operation | | No |

| | | |
|--|---|-----|
| Control supply voltage / rated value / maximum | V | 230 |
| Item designation | | |
| • according to DIN EN 61346-2 | | Q |
| • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 | | Q |

Certificates/approvals:

General Product Approval



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)




<http://support.automation.siemens.com/WW/view/en/5TT5051-0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT5051-0

CAX-Online-Generator

<http://www.siemens.com/cax>

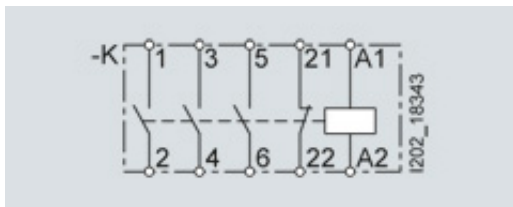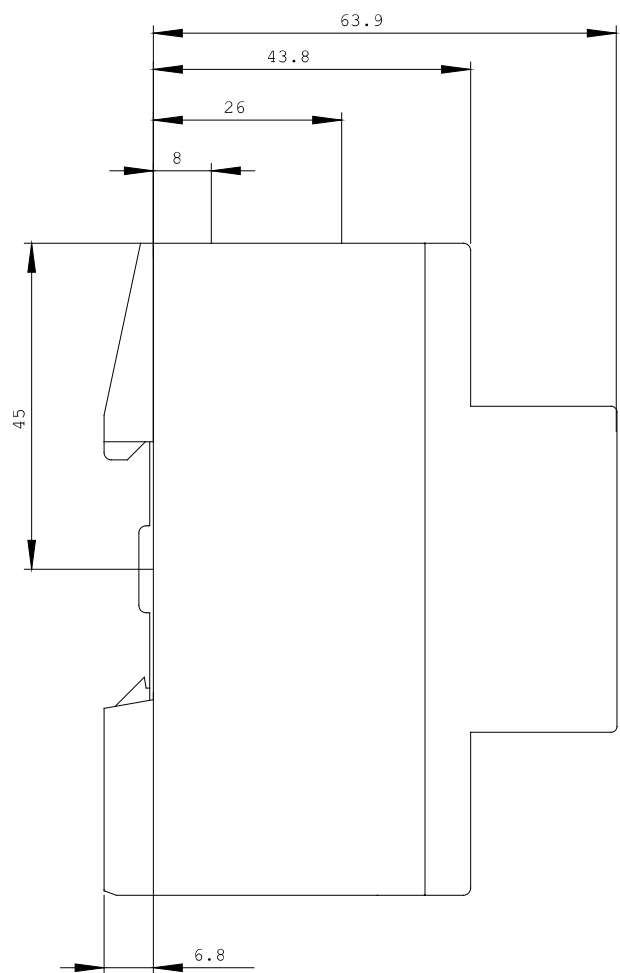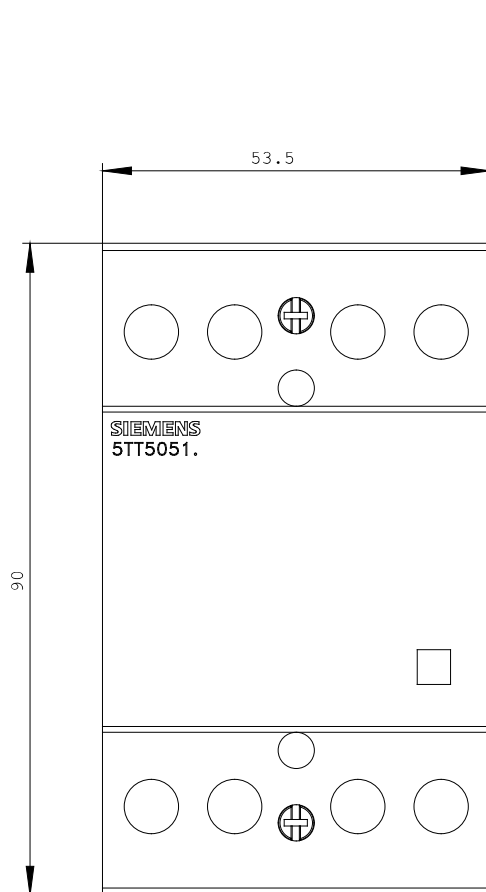

last change:

Aug 2, 2012