



INSTA CONTACTOR WITH 2 NO CONT. AND 2 NC CONT.  
CONTACT FOR AC 230,  
400V 40A ACTIVATION AC230V DC220V

Similar to image

Technical data:		
Mounting depth	mm	64
Height	mm	90
Width	mm	53.5
Depth	mm	71
Number of NC contacts		2
Number of NO contacts		2
Number of pitch units for width		3
Type of voltage		
• for operating		AC/DC
• of the operating voltage		AC
Control supply voltage / rated value	V	230
Operating current / rated value	A	40
Operating voltage / rated value		
• minimum	V	400
• maximum	V	400
Protection class IP		IP20
Product extension / can be installed / supplementary device		Yes
Product component / slide for manual operation		No

<b>Control supply voltage / rated value / maximum</b>	V	230
<b>Item designation</b>		
• according to DIN EN 61346-2		Q
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		Q

#### Certificates/approvals:

##### General Product Approval



#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)




<http://support.automation.siemens.com/WW/view/en/5TT5042-0/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT5042-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT5042-0)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

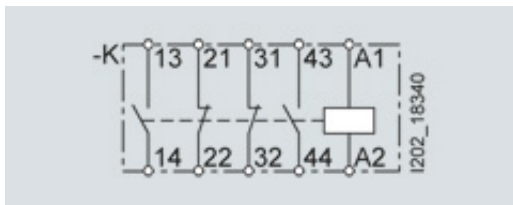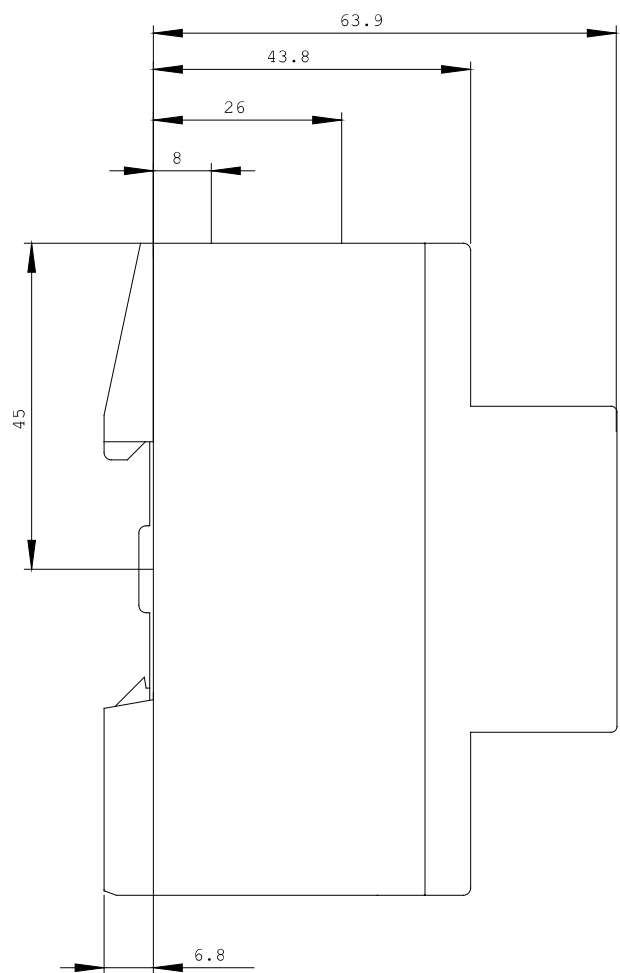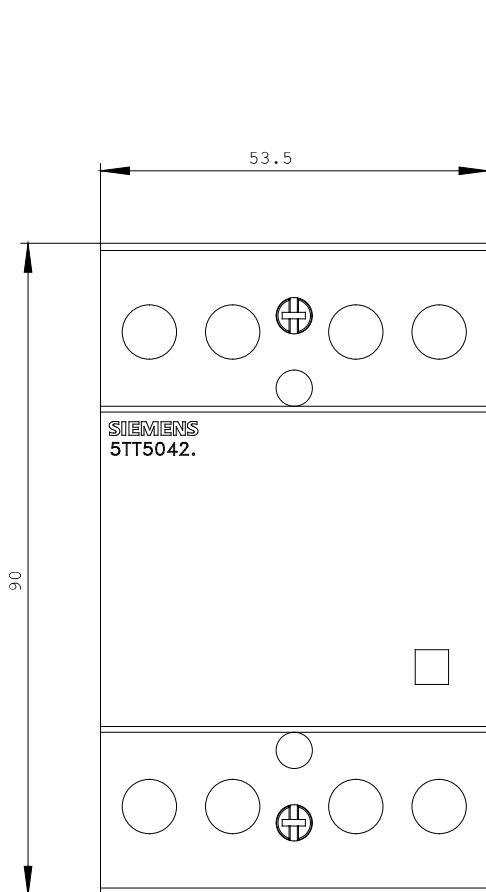

last change:

Aug 2, 2012